

Garden Planting Guideline



This page has been intentionally left blank

Contents

Introduction.....	2	
Context Mapping	3	
Interpretation of Information	4	
Zone 1		
Characteristics	5	
Plant Palette.....	6	
Example Application	10	
• Small Roundabouts	10	
• Medium Roundabouts	12	
• Large Roundabouts	13	
• Cul-de-sacs	14	
• Public Access Ways	16	
• Parks & Gardens.....	19	
Zone 2		
Characteristics	23	
Plant Palette.....	24	
Example Application	28	
• Small Roundabouts	28	
• Medium Roundabouts	29	
• Large Roundabouts	30	
• Cul-de-sacs	32	
• Public Access Ways	34	
• Civic Spaces	37	
• Parks & Gardens	41	
Zone 3		
Characteristics	43	
Plant Palette.....	44	
Example Application	48	
• Small Roundabouts	48	
• Medium Roundabouts	49	
		• Large Roundabouts
		• Cul-de-sacs
		• Civic Spaces
		• Parks & Gardens
		Other Native Plants - Supplementary Palette
		Plant Palette.....
		Photo References

Introduction

Purpose

This Guideline has been prepared by Josh Byrne & Associates (JBA) on behalf of the City of Bayswater (the City). It provides a practical and flexible planting guide which will be used to inform future planting proposals and works across a range of garden scenarios and conditions within the City.

This is the first step in establishing a consistent approach to planting, considering both local environmental and amenity values. The Guideline is based on general observations of existing areas within the City, as well as analysis of readily available geographic information system (GIS) data on soils and vegetation complexes in developing zones of planting palettes.

This Guideline focuses on garden scenarios that include roundabouts, cul-de-sacs, public access ways (PAW), parks and gardens and civic spaces.

The City of Bayswater documents highlighted below have informed this Guideline and outline specific guidance and regulatory compliance:

- City of Bayswater website – encouraging the planting of native plants, plus a link to the document “Local Native Plants Guide”
<https://www.bayswater.wa.gov.au/environment-and-sustainability/native-flora-and-fauna/native-plants>
- City of Bayswater website – Greening our City
<https://www.bayswater.wa.gov.au/environment-and-sustainability/streetscapes,-parks-and-gardens/greening-our-city>
- City of Bayswater website – Biodiversity Strategy
<https://www.bayswater.wa.gov.au/environment-and-sustainability/biodiversity>

It is important when undertaking design and planting of gardens, that consideration be given to crime prevention through environmental design (CPTED) principles.


Reference must also be made to the Main Roads Safety standards:

- Main Roads website - ‘Main Roads Revegetation and landscaping Guide 7/5/2020’ and ‘Guidelines: Vegetation placement within the road reserve’
<https://www.mainroads.wa.gov.au/BuildingRoads/StandardsTechnical/RoadandTrafficEngineering/RoadsideItems/Pages/Revegetation-and-Landscaping.aspx>

Design Principles

The purpose of the document is to provide planting palettes that can work across a range of garden scenarios and should consider the following:

- **Form and Function** – Plants are selected based on the local environmental context to enhance the unique character of the local area. Some of the critical design considerations will be soil type, irrigated or non irrigated, plant height, width, form and colour; also, the creation of shade and pedestrian and vehicle sightlines.
- **Native Plant Species** – The plant palettes focus on native plant species particular to soil type. This provides a more waterwise alternative to the City’s traditional use of exotic species.
- **Biodiversity** – The plant palettes reflect the rich diversity of species native to this area, many of them endemic to the Southwest of Australia. The plant palettes and arrangements will support and benefit a range of fauna including birds, reptiles and insects.
- **Ongoing Success** – Plant palettes and arrangements that require less maintenance and also consider maintenance implications, particularly concerning the safety of council workers or contractors maintaining gardens in road reserves.

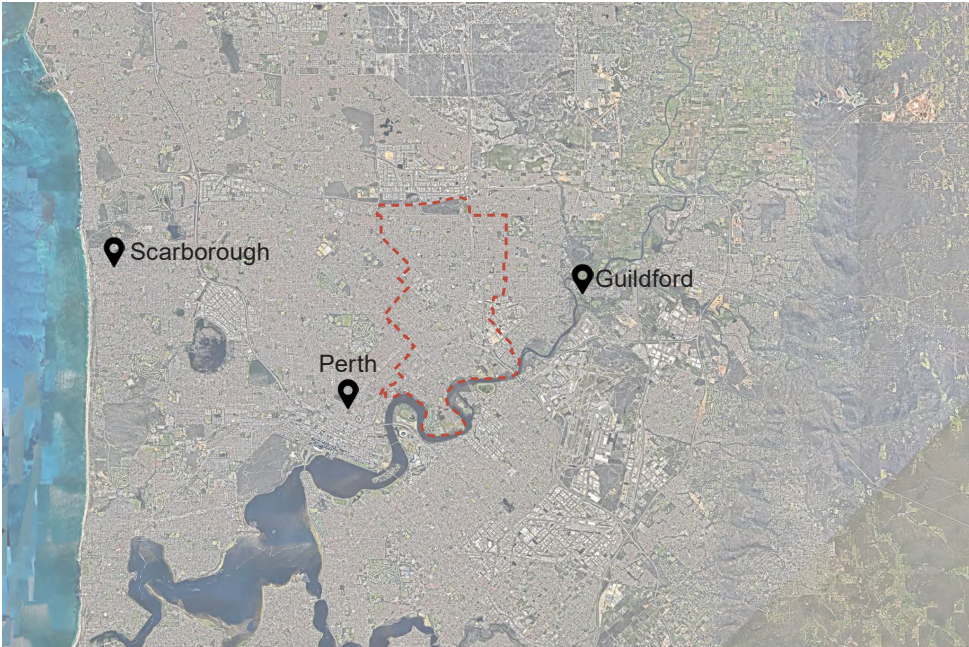

— City of Bayswater Boundary

The City of Bayswater lies within the Swan Coastal plain, bounded by the Reid Highway to the north and the Swan River the the south.

Context Mapping

The GIS mapping presented is used collectively to build an understanding of the local environmental context. The land underlying Bayswater is part of a much larger landscape linked by water catchments, subterranean and surface water features, plant and animal habitats, and people and animal movements. These form part of a broader regional and cultural narrative that provides an opportunity for artistic and educational interpretation on-site through a tangible expression of the unique local landscape’s character, seasonality and colour though an understanding of vegetation, soils and geology.

The plant selections for Bayswater are underpinned by an understanding of this unique regional context. Analysis of landform, soil, and vegetation complexes has helped to build an understanding of the relationships between soil, flora and fauna in the local area which underpin biodiversity and environmental health.

Three main vegetation complexes make up the Bayswater area - Bassendean, Guildford and Swan.

Bassendean Vegetation Complex

The Bassendean Vegetation Complex comprises a range of vegetation from woodland of *Euclayptus marginata* (Jarrah), *Allocasuarina fraseriana* (Sheoak), Banksia species to low woodland of Melaleuca species, and sedgelands on the moister sites. This area includes the transition of *Euclayptus marginata* (Jarrah) to *Eucalyptus tottiana* (Pricklybark) in the vicinity of Perth.

Guildford Vegetation Complex


The Guildford Vegetation Complex comprises a mixture of open forest to tall open forest of *Corymbia calophylla* (Marri), *Eucalyptus wandoo* (Wandoo), *Eucalyptus marginata* (Jarrah) and woodland of *Eucalyptus wandoo* (Wandoo) with rare ocurrences of *Eucalyptus lane-poolei* (Salmon White Gum). Minor components include *Eucalyptus rudis* (Flooded Gum) and *Melaleuca raphiophylla* (Swamp Paperbark).

Swan Vegetation Complex

The Swan Vegetation Complex comprises a fringing woodland of *Euclayptus rudis* (Flooded Gum) - *Melaleuca raphiophylla* (Swamp Paperbark) with localised occurrence of low open forest of *Casuarina obesa* (Swamp Sheoak) and *Melaleuca cuticularis* (Saltwater Paperbark).


Vegetation Complex Mapping

- Local government authority boundaries
- Bassendean complex (central and south)
- Guildford complex
- Herdsmen complex
- Karrakatta complex (central and south)
- Southern River complex
- Swan complex
- Vasse complex

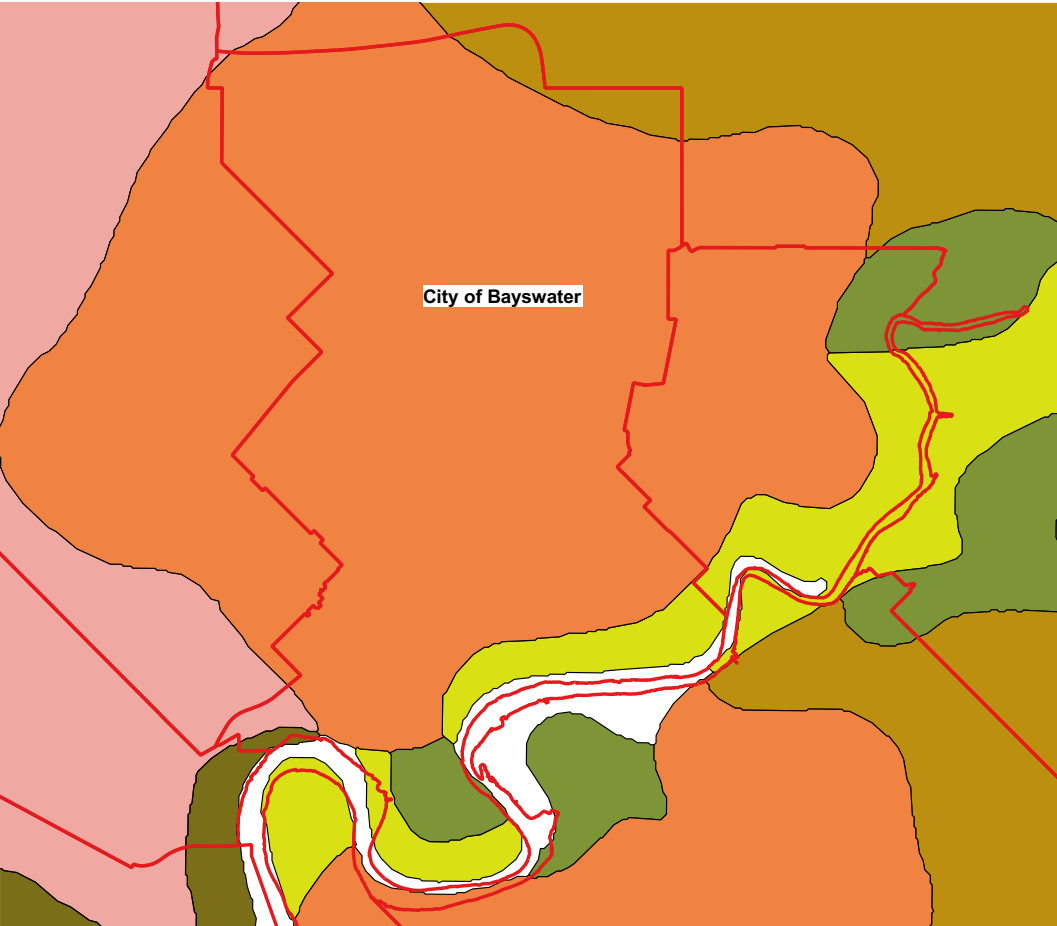

Surface Geology Mapping

- Local government authority boundaries
- Cps – PEATY CLAY - dark grey and black with variable sand and organic content, of lacustrine origin
- Ms4 - SANDY SILT - cream to pale brown alluvium, clayey in part, fine to medium-grained sand, of alluvial origin
- S8 - SAND - white to pale grey at surface, yellow at depth, fine to medium-grained, moderately well sorted, subangular to sub-rounded quartz, of eolian origin
- S10 - SAND - as S8 over various other units
- Sm1 - SILTY SAND - strong brown, leached at surface, fine to medium-grained, quartz, variable silt content

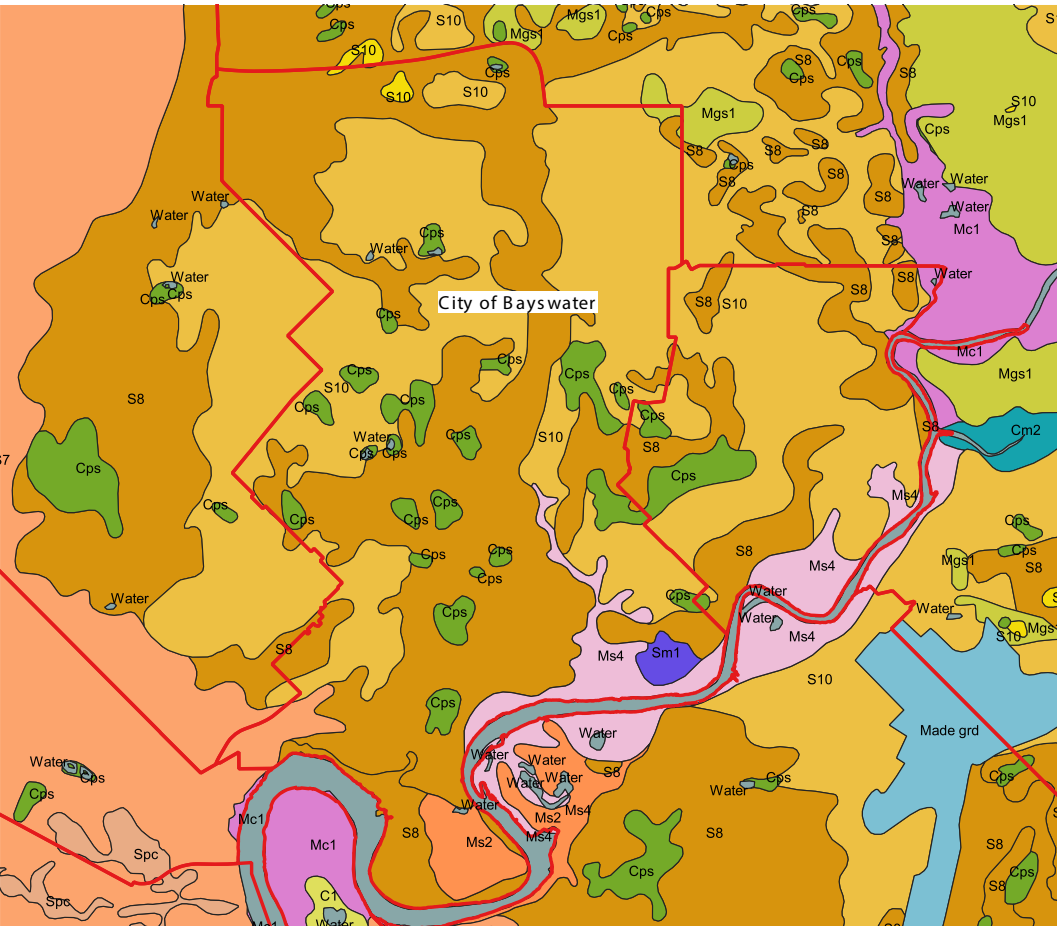

Interpretation of Information

Character Zones

The character zones are based on general observations of the local government area, as well as the analysis of readily available GIS information on geomorphology, soils and vegetation complexes. Please note that while they take into account location, soil geology, and associated vegetation complex of the area for ease of use and application, some generalisations have been made. Each planting site should be assessed according to the existing on-site conditions and design intent.

Plant Palettes

The plant palettes have been influenced by the predominant vegetation complex within each Character Zone. Each plant list contains an expression of the native species that grow within that vegetation complex.

Whilst there is a crossover of species common to all three vegetation complexes, signature flowering species have been drawn from the different vegetation complexes to showcase key native species of the area.

Character Zone 1:


References the Bassendean Vegetation Complex drylands (predominant soil geology – sand)

Character Zone 2:

References the Bassendean Vegetation Complex damplands (predominant soil geology - sand and peaty clay)

Character Zone 3:

References both the Guildford and the Swan Vegetation Complexes (predominant soil geology - sand and silty sand of the riverine areas)

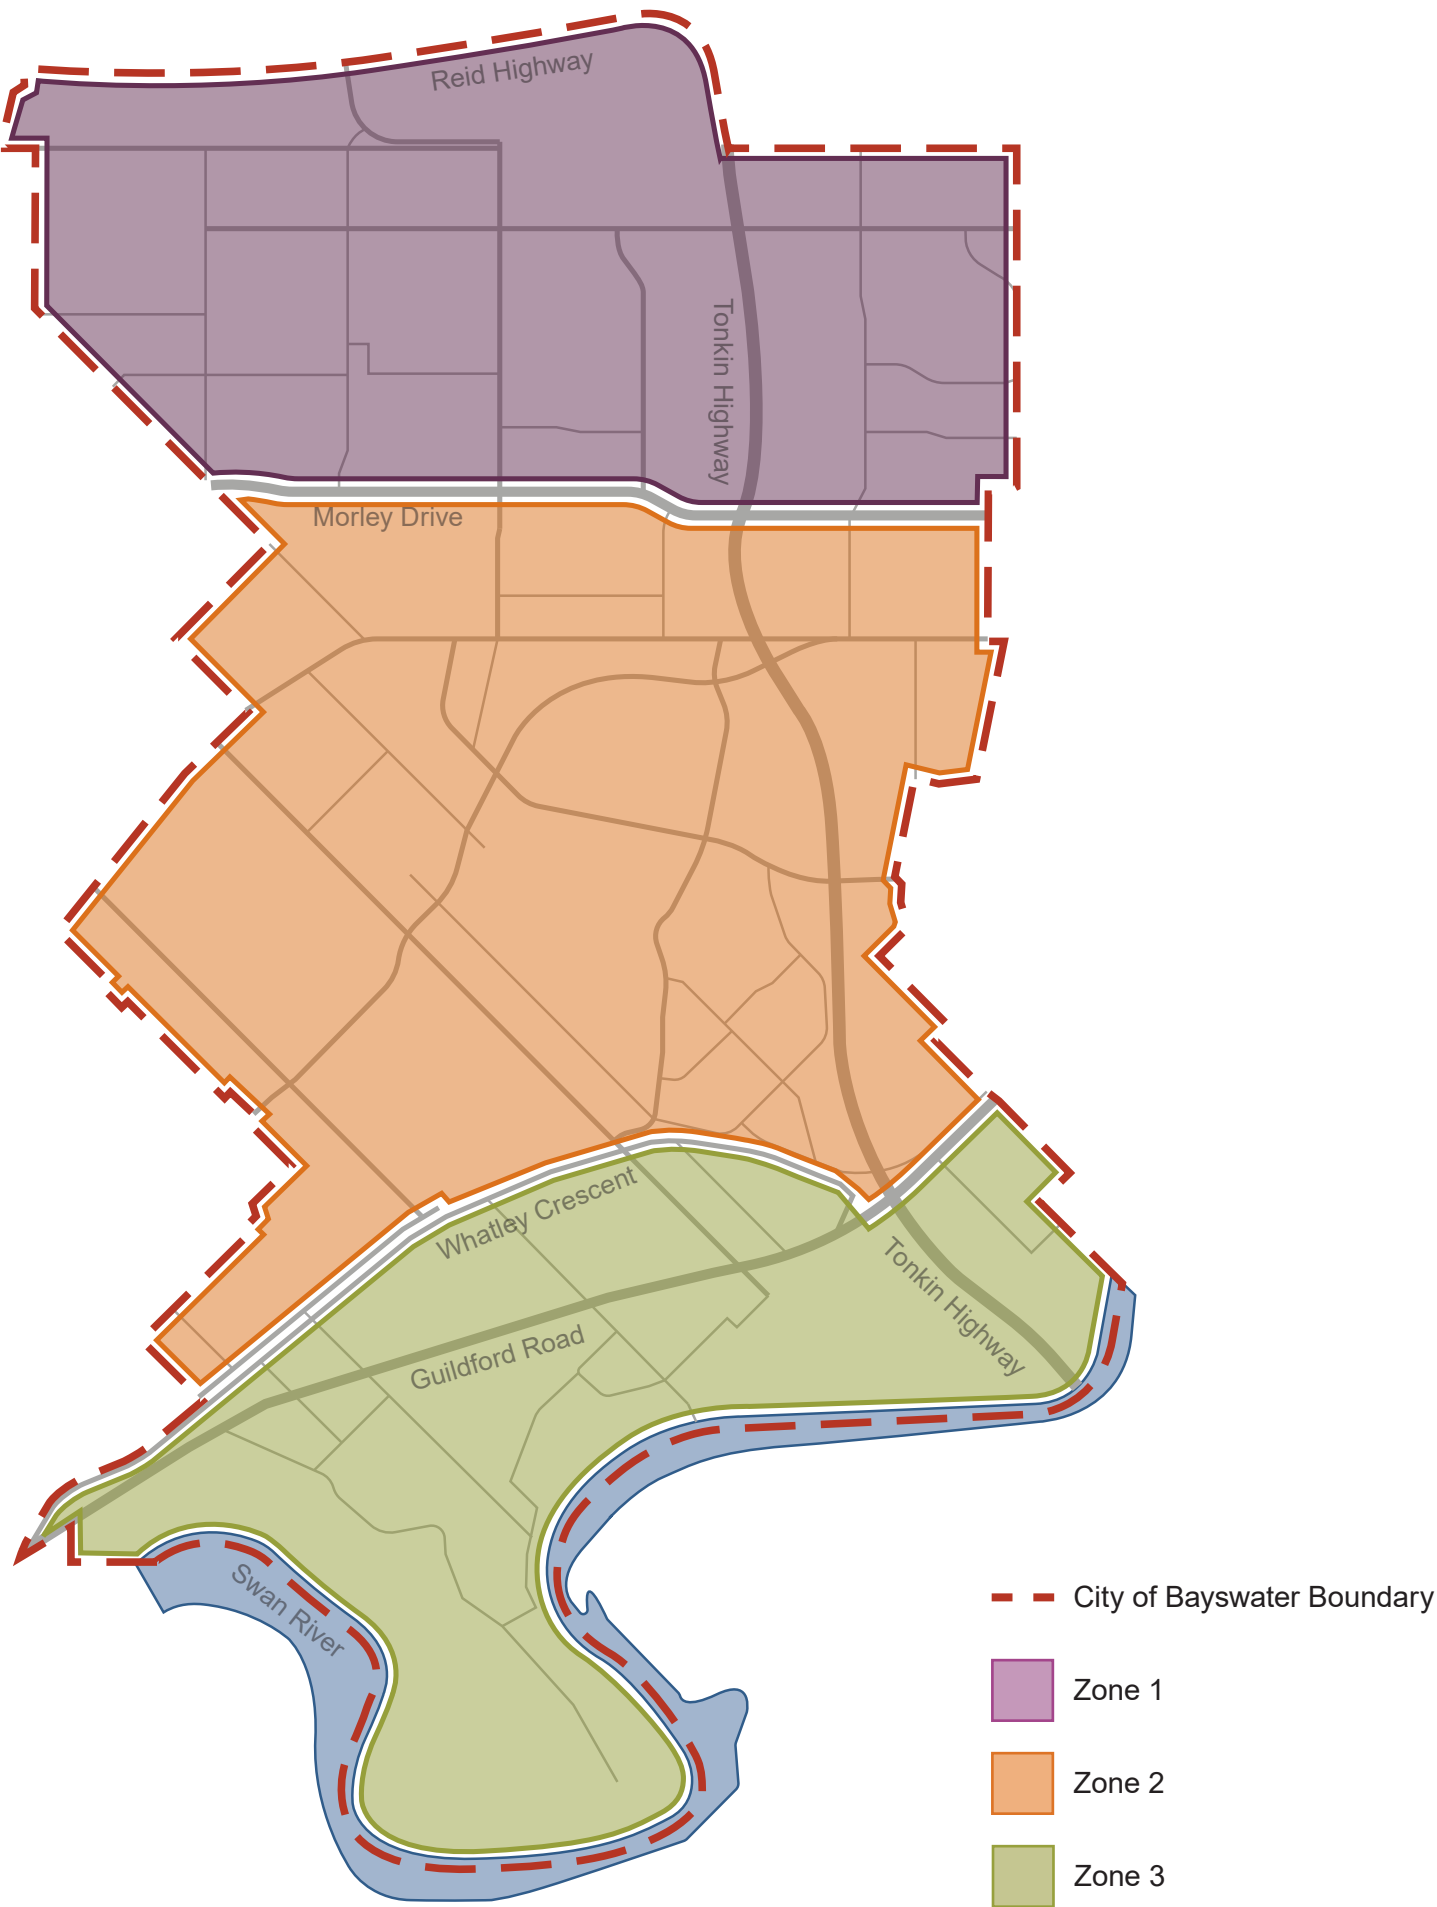


Character Zone 1

Characteristics

Based on GIS research, the area north of Morley Drive, within the City of Bayswater, has been classified as Character Zone 1.

This zone has been defined by the predominantly Pinjarra soil geology system and surface geology system of S8/S10 sand. In response to this, the plant pallet for Zone 1 comprises species native to the Bassendean Sands Vegetation Complex.

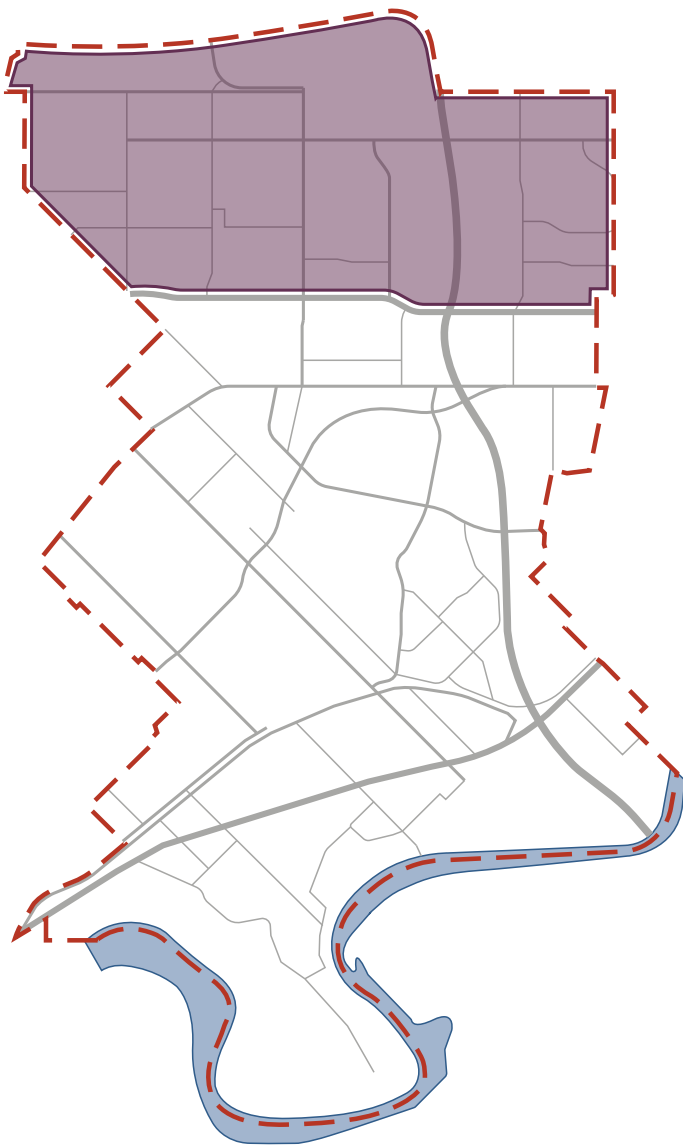

Banksia attenuata (Candle Banksia)

Character Zone 1

Plant Pallet - Shrubs

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application						
										Small R.A.B	Medium R.A.B	Large R.A.B	Cul-de-sac	P.A.W.	Civic Space	Parks
	Shrubs															
Bassendean Sands	Asa	Acacia saligna	Orange Wattle/Coojong	2 to 6	3 to 5	3	FS	Win/Spr	✓✓✓							✓
	Ase	Acacia sessilis	Parrot Bush	1	2	1.5	FS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Ahu	Allocasuarina humilis	Dwarf Sheoak	1.5	1.5	1.5	FS/PS	Aut/Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Agr	Aotus gracillima	N/A	1	0.5	0.5	FS/PS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Apr	Aotus procumbens	N/A	0.5	0.5	0.5	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Bad	Banksia attenuata dwarf	Dwarf Bull Banksia	1	2	1.5	FS/PS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Bmd	Banksia menziesii dwarf	Dwarf Firewood Banksia	1	1.5	1.5	FS	Aut/Win	✓✓✓		✓	✓	✓	✓	✓	✓
	Bel	Beaufortia elegans	Elegant Beaufortia	1	1	0.8	FS	Win/Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Ber	Bossiaea eriocarpa	Common Brown Pea	1	1	0.8	FS/PS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Csa	Calothamnus sanguineus	Silky Leaved Blood Flower	2	2	1.5	FS	Aut/Win/Spr	✓✓✓						✓	✓
	Can	Calytrix angulata	Yellow Starflower	1	1	0.8	FS/PS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Cfr	Calytrix fraseri	Pink Starflower	0.5	0.5	0.5	FS	Sum/Aut/Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Gca	Gastrolobium capitatum	Bacon and Eggs	0.5	1	0.8	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Gsc	Gompholobium scabrum	Painted Lady	0.5	0.5	0.5	FS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hru	Hakea ruscifolia	Candle Hakea	1.5	1.5	1.2	FS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Hro	Hypocalymma robustum	Swan River Myrtle	1.2	1	0.8	FS/PS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Jfu	Jacksonia furcellata	Grey Stinkwood	3	2	1.5	FS/PS	Spr/Sum/Aut	✓✓✓					✓	✓	✓
	Jst	Jacksonia sternbergiana	Green Stinkwood	3	2	1.5	FS/PS	All year	✓✓✓					✓	✓	✓
	Mri	Macrozamia riedlei	Zamia Palm	1.5	1.5	1	FS/PS	Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Msc	Melaleuca scabra	Rough Honey Myrtle	1	1	0.8	FS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Mtr	Melaleuca trycophylla	N/A	1	1	0.8	FS	Win/Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Psa	Persoonia saccata	Snottygobble	1.5	1.5	1.5	FS	Wint/Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Psp	Philoteca spicata	Salt and Pepper	0.5	0.5	0.5	FS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Rin	Regelia inops	N/A	2	1	0.8	FS	Spr/Sum	✓✓✓		✓	✓			✓	✓
	Vni	Verticordia nitens	Morrison Featherflower	1	0.5	0.5	FS	Sum	✓✓✓		✓	✓	✓	✓	✓	✓

Sun/Shade Conditions		Waterwise	
FS	Full Sun	✓✓✓	Waterwise
PS	Part Shade	✓✓	Waterwise once established
Sh	Shade	✓	Requires irrigation

Character Zone 1

Plant Pallet - Strappy Plants

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application						
										Small R.A.B	Medium R.A.B	Large R.A.B	Cul-de-sac	P.A.W.	Civic Space	Parks
	Strappy Plants															
Bassendean Sands	Ahu	<i>Anigozanthos humilis</i>	Catspaw	0.5	0.5	0.3	FS/PS	Win/Spr	✓✓	✓	✓	✓	✓	✓	✓	✓
	Ama	<i>Anigozanthos manglesii</i>	Mangles Kangaroo Paw	1	1	0.8	FS/PS	Win/Spr	✓✓	✓	✓	✓	✓	✓	✓	✓
	Amb	<i>Anigozanthos manglesii</i> x 'Bush Dance'	Kangaroo Paw Bush Dance	0.7	0.5	0.5	FS/PS	Win/Spr	✓✓	✓	✓	✓	✓	✓	✓	✓
	Bco	<i>Burchardia congesta</i>	Milmaids	0.5	0.3	0.2	FS/PS	Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Cca	<i>Conostylis aculeata</i>	Prickly Conostylis	0.4	0.4	0.3	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Cac	<i>Conostylis candicans</i>	Grey Cottonheads	0.4	0.4	0.3	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Dre	<i>Dianella revoluta</i>	Flax Lily	1	1	0.8	FS/PS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Dlr	<i>Dianella revoluta</i> 'Little Rev'	Flax Lily Little Rev	0.4	0.4	0.3	FS/PS/Sh	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Drv	<i>Dianella revoluta</i> 'Revelation'	Flax Lily Revelation	0.5	0.5	0.5	FS/PS/Sh	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Ola	<i>Orthrosanthus laxus</i>	Morning Iris	0.5	0.5	0.5	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Poc	<i>Patersonia occidentalis</i>	Western Pattersonia	0.5	0.5	0.5	FS/PS	Win/Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Sla	<i>Stirlingia latifolia</i>	Blueboy	0.5	0.5	0.5	FS	Win/Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Xpr	<i>Xanthorrhoea preissii</i>	Grass Tree	1.5	1	1	FS	Win/Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓

Sun/Shade Conditions		Waterwise	
FS	Full Sun	✓✓✓	Waterwise
PS	Part Shade	✓✓	Waterwise once established
Sh	Shade	✓	Requires irrigation

Character Zone 1

Plant Pallet - Groundcovers

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application						
										Small R.A.B	Medium R.A.B	Large R.A.B	Cul-de-sac	P.A.W.	Civic Space	Parks
	Groundcovers															
Bassendean Sands	Asp	<i>Acacia saligna prostrate</i>	Coojong Groundcover	0.2	1	1	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Bda	<i>Banksia dallanayi</i>	Couch Honeypot	0.2	1	1	FS/PS	Aut/Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Dcm	<i>Dampiera linearis 'Cobalt Mound'</i>	Dampiera	0.3	0.5	0.5	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Dwb	<i>Dampiera linearis 'Western Blue'/'Blue'</i>	Dampiera	0.3	1	0.5	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hco	<i>Hardenbergia comptoniana</i>	Native Wisteria	0.2	1	0.3	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hpu	<i>Hemiandra pungens</i>	Snake Bush	0.3	1.5	1	FS/PS	Spr/Sum/Aut	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hpa	<i>Hemiandra pungens alba</i>	Snake Bush White	0.3	1.5	1	FS/PS	Sum/Aut	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hpp	<i>Hemiandra pungens purpurea</i>	Snake Bush Purple	0.3	1.5	1	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓

Sun/Shade Conditions		Waterwise	
FS	Full Sun	✓✓✓	Waterwise
PS	Part Shade	✓✓	Waterwise once established
Sh	Shade	✓	Requires irrigation

Shrubs




Aotus gracillima



Bosseaea eriocarpaii



Calytrix angulata

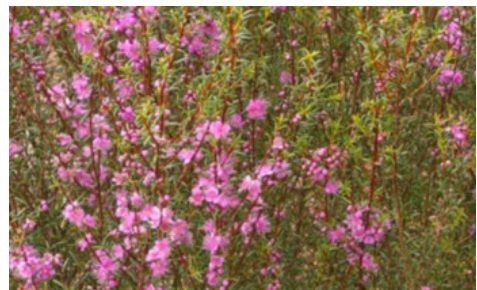

Hypocalymma robustum



Macrozamia riedlei



Beaufortia elegans



Calothamnus sanguineus



Hakea ruscifolia



Jacksonia sternbergiana



Melaleuca scabra


Strappy Plants



Anigozanthos humilis



Anigozanthos manglesii 'Bush Dance'

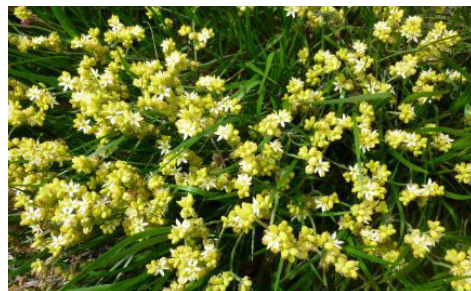

Conostylis aculeata




Dianella revoluta




Patersonia occidentalis



Anigozanthos manglesii

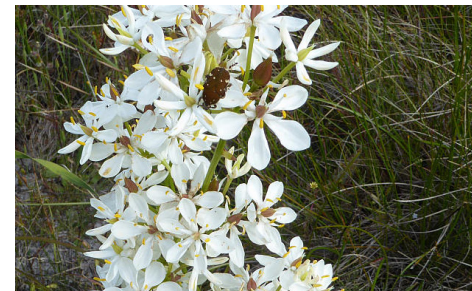

Burchardia congesta

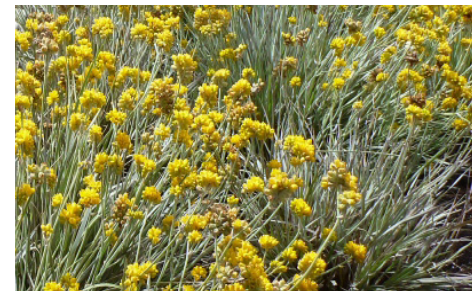

Conostylis candicans



Orthrosanthus laxus



Stirlingia latifolia

Groundcovers




Acacia saligna prostrate



Dampiera linearis 'Cobalt Mound'



Hardenbergia comptoniana

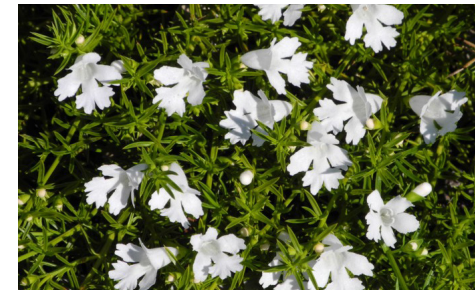


Hemiandra pungens alba




Banksia dallanney



Dampiera linearis 'Blue'

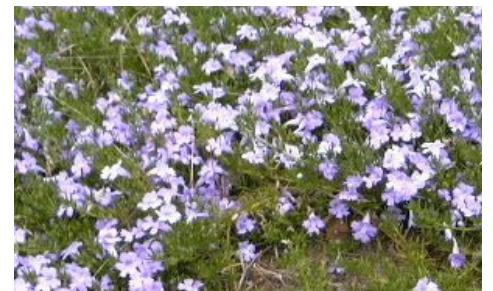

Hemiandra pungens

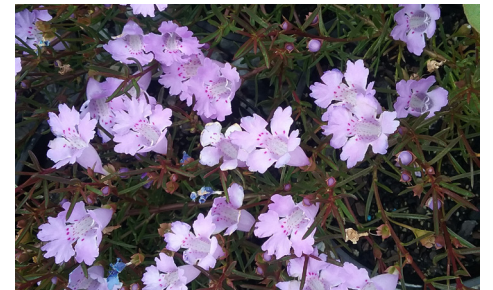


Hemiandra pungens purpurea

Character Zone 1

Small Roundabout

Example Application - Plan

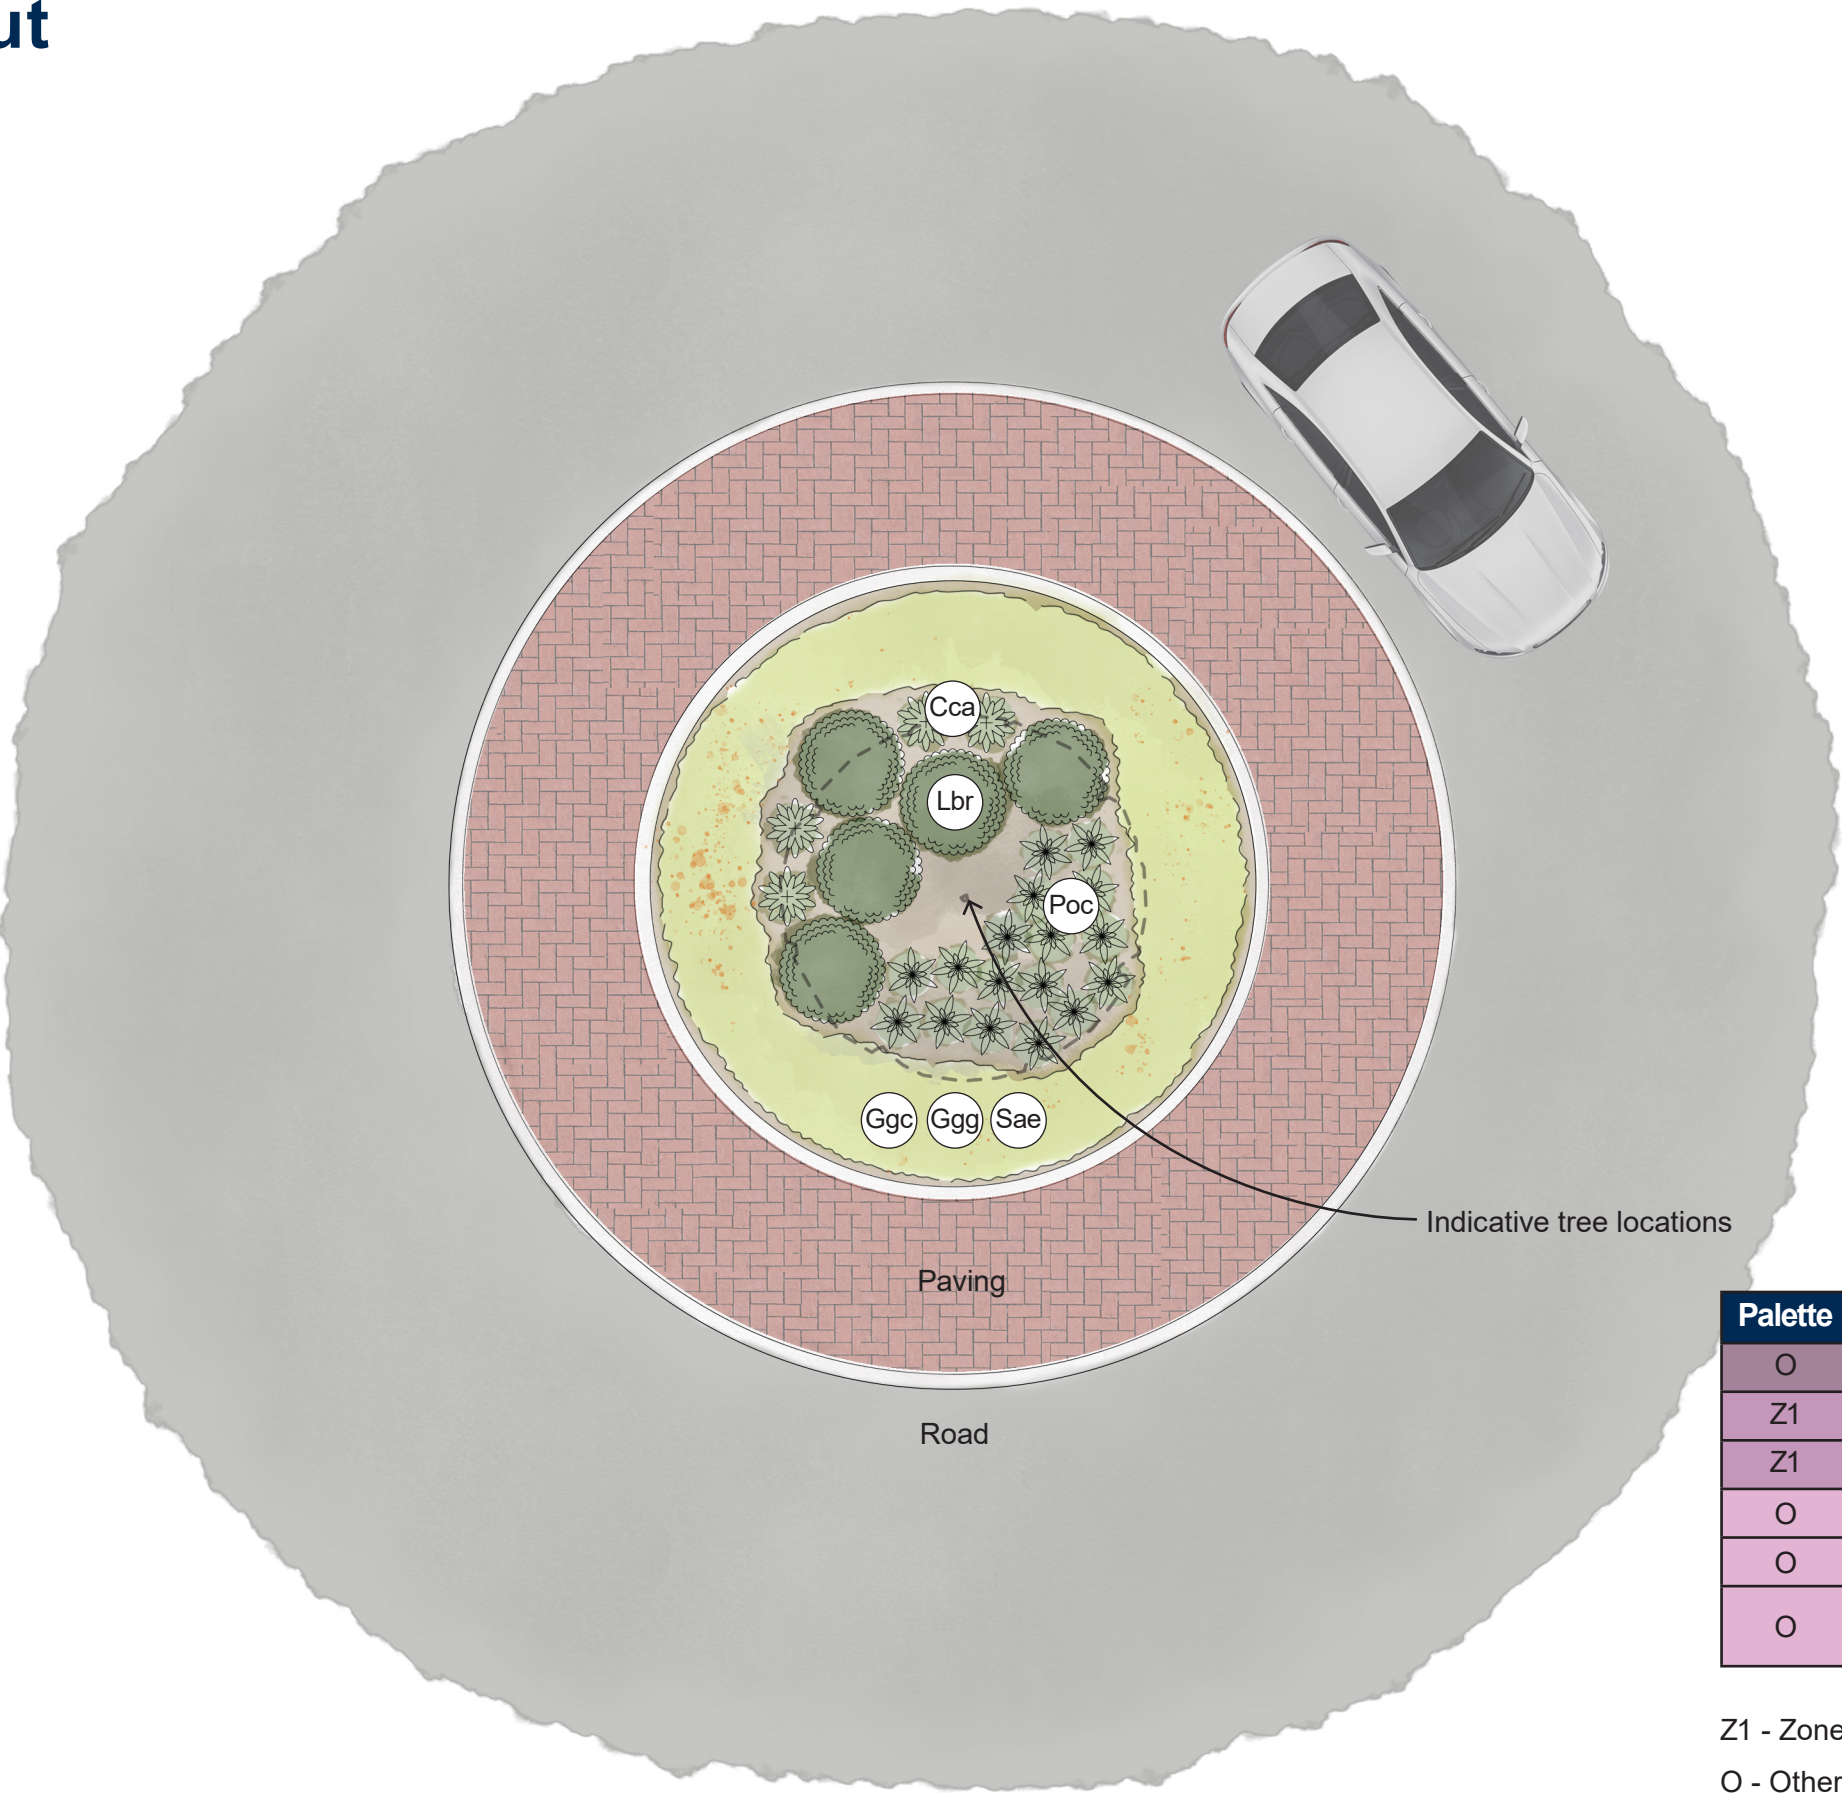


Palette	Key	Genus/Species
O	Lbr	<i>Leucophyta brownii</i>
Z1	Cca	<i>Conostylis candicans</i>
Z1	Poc	<i>Patersonia occidentalis</i>
O	Ggc	<i>Grevillea crithmifolia</i> "Green Carpet"
O	Ggg	<i>Grevillea obtusifolia</i> "Gin Gin Gem"
O	Sae	<i>Scaevola aemula</i> "Kings Park Midnight"

Z1 - Zone 1 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 1

Small Roundabout


Example Application - Perspective

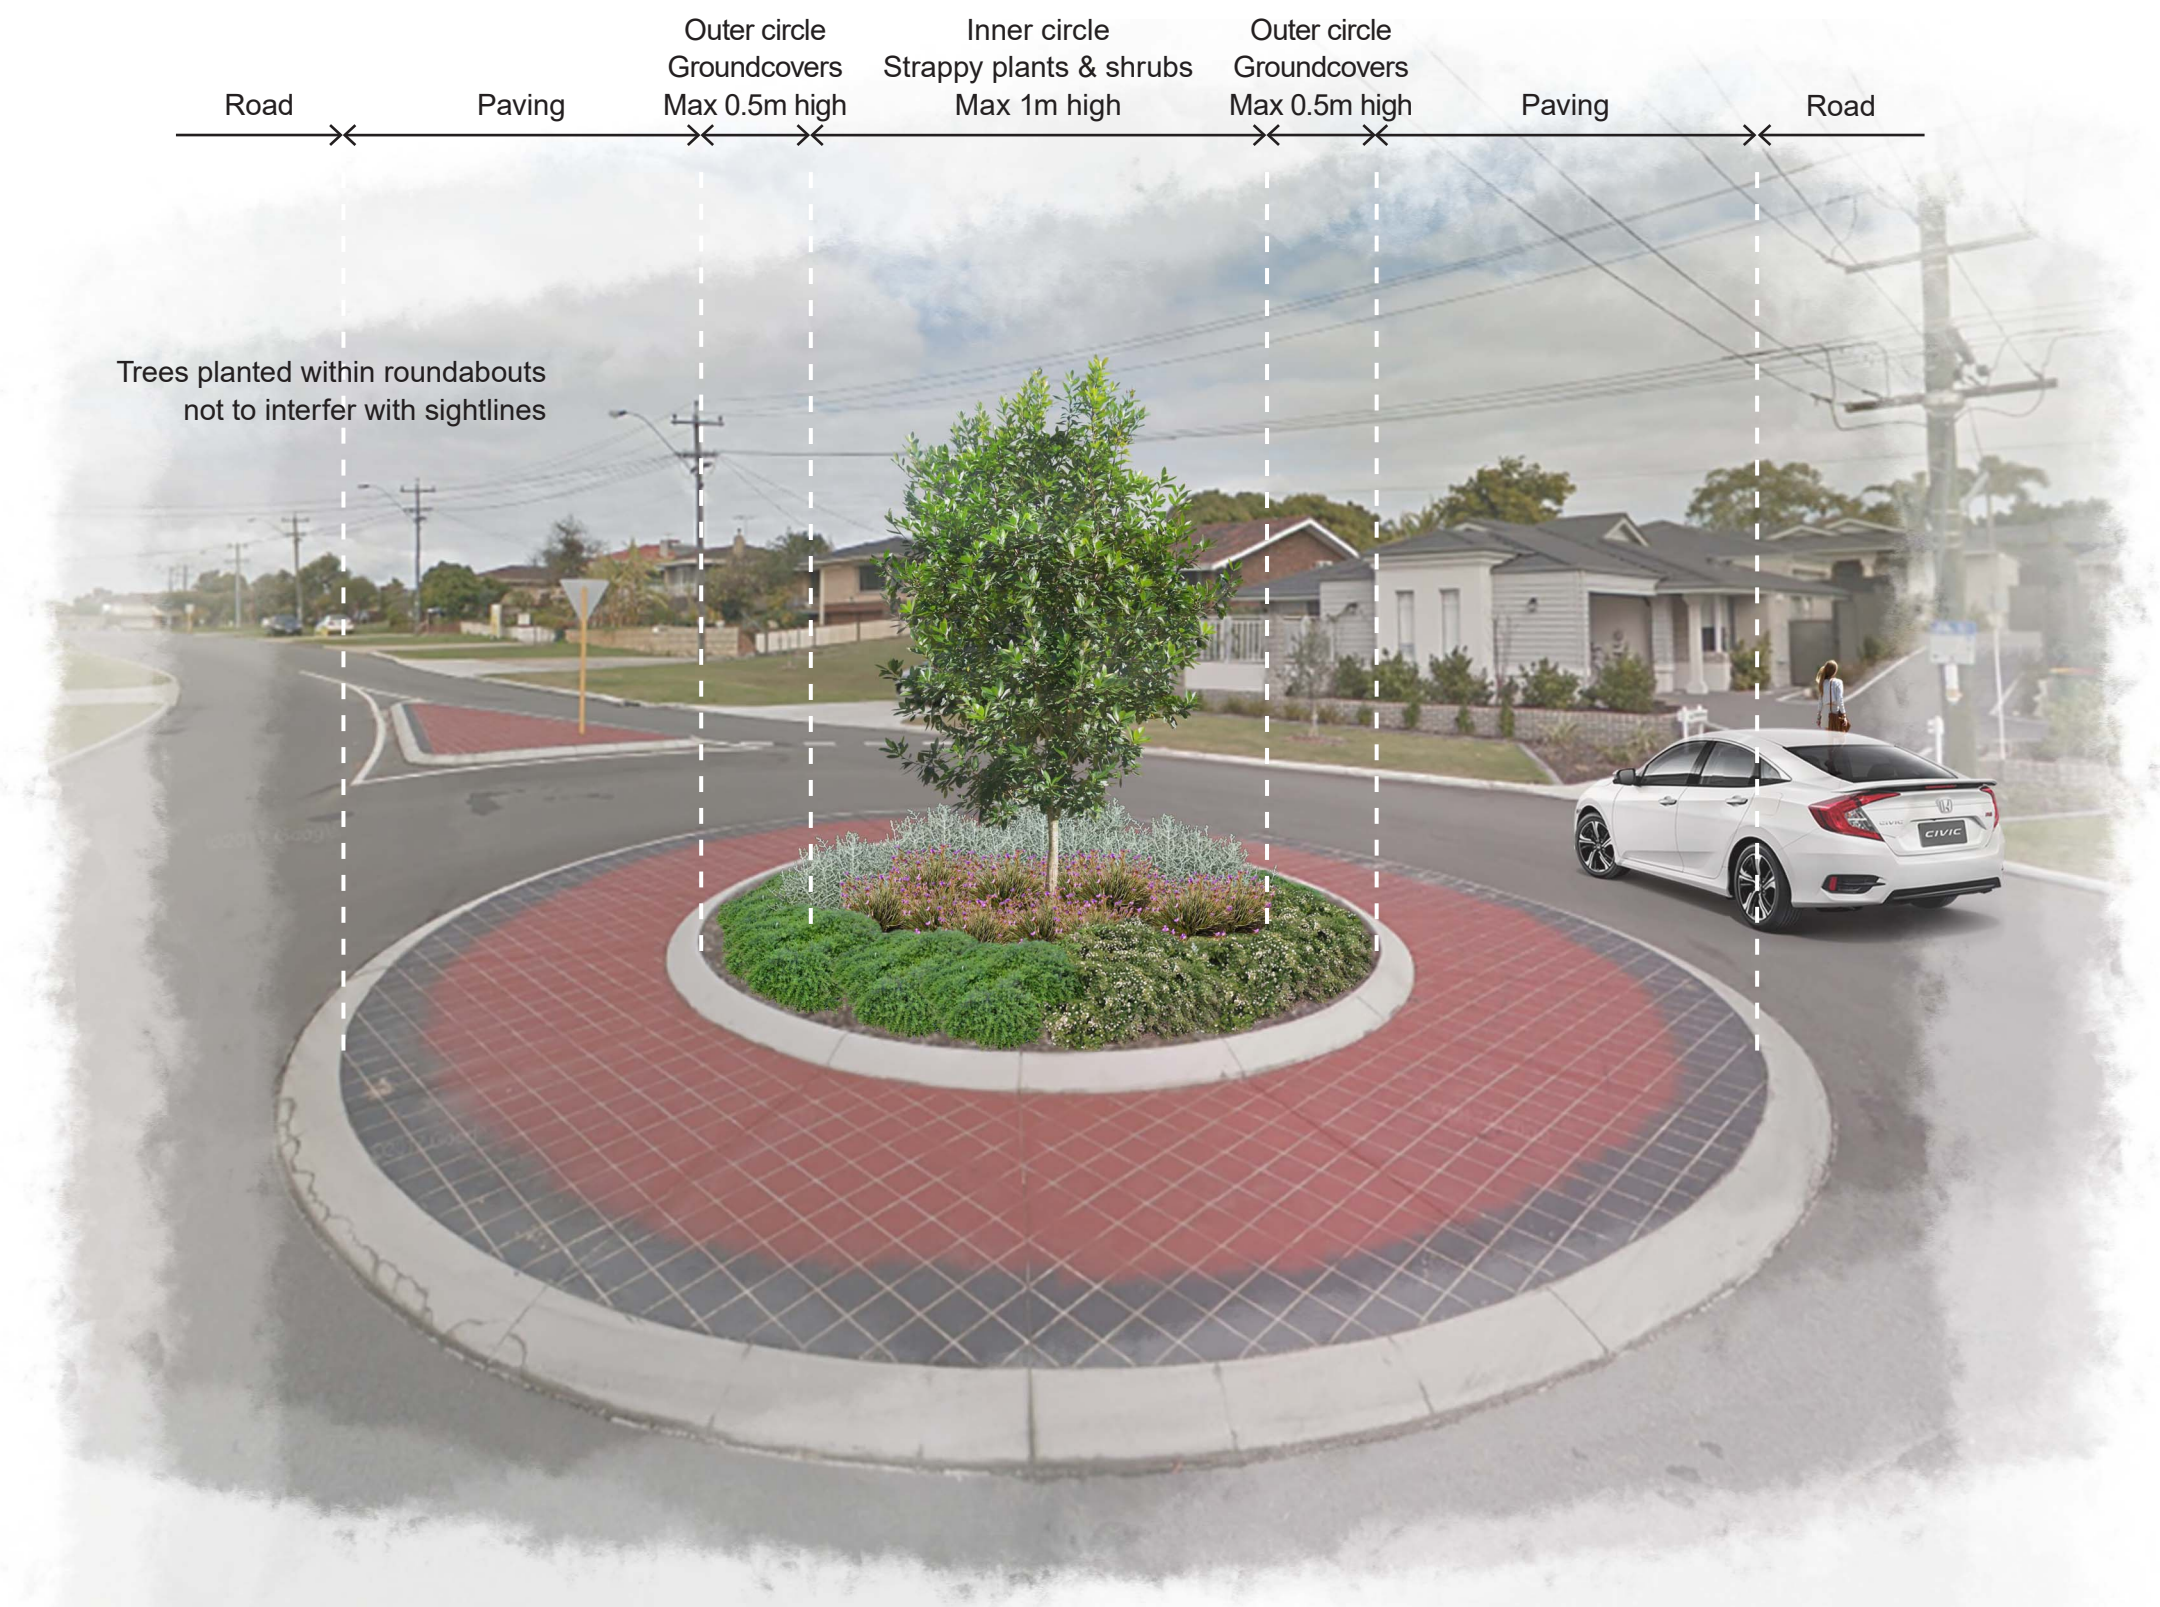

Character Zone 1

Medium Roundabout

Example Application - Plan

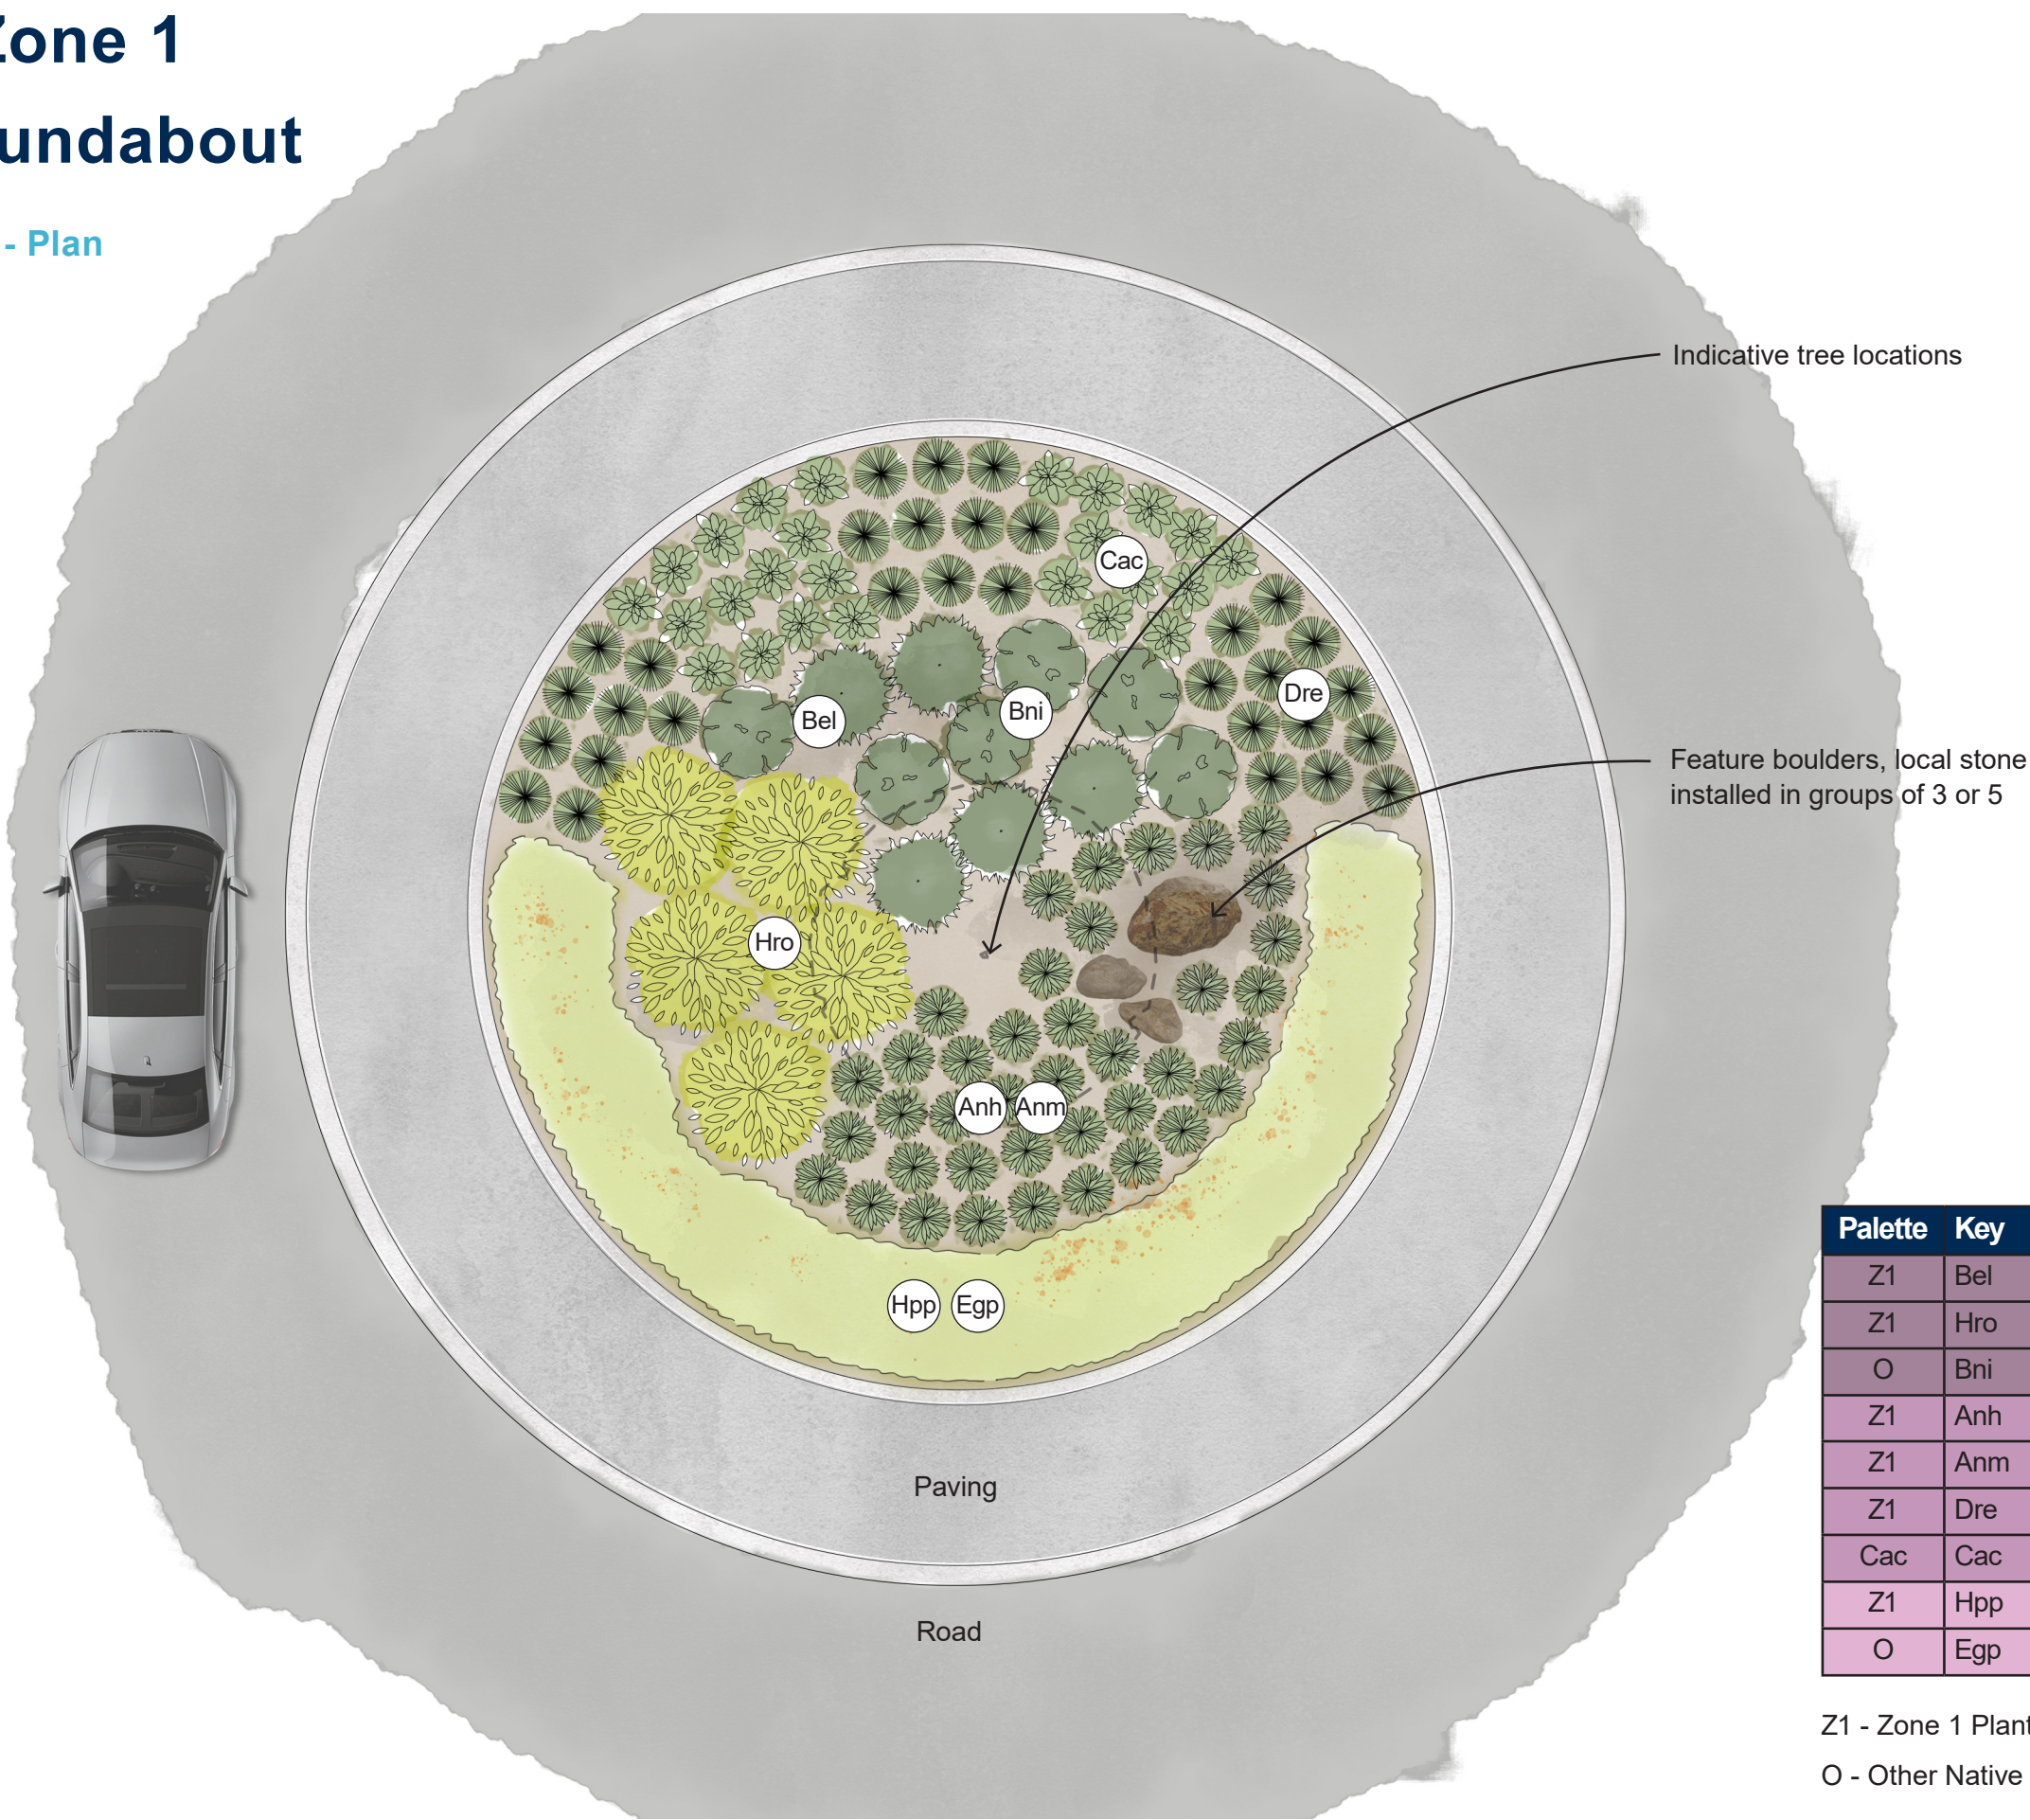


Palette	Key	Genus/Species
Z1	Bel	<i>Beaufortia elegans</i>
Z1	Hro	<i>Hypocalymma robustum</i>
O	Bni	<i>Banksia nivea</i>
Z1	Anh	<i>Anigozanthos humilis</i>
Z1	Anm	<i>Anigozanthos manglesii</i>
Z1	Dre	<i>Dianella revoluta</i>
Cac	Cac	<i>Conostylis aculeata</i>
Z1	Hpp	<i>Hemiandra pungens purpurea</i>
O	Egp	<i>Eremophila glabra prostrata</i>

Z1 - Zone 1 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 1

Large Roundabout

Example Application - Plan

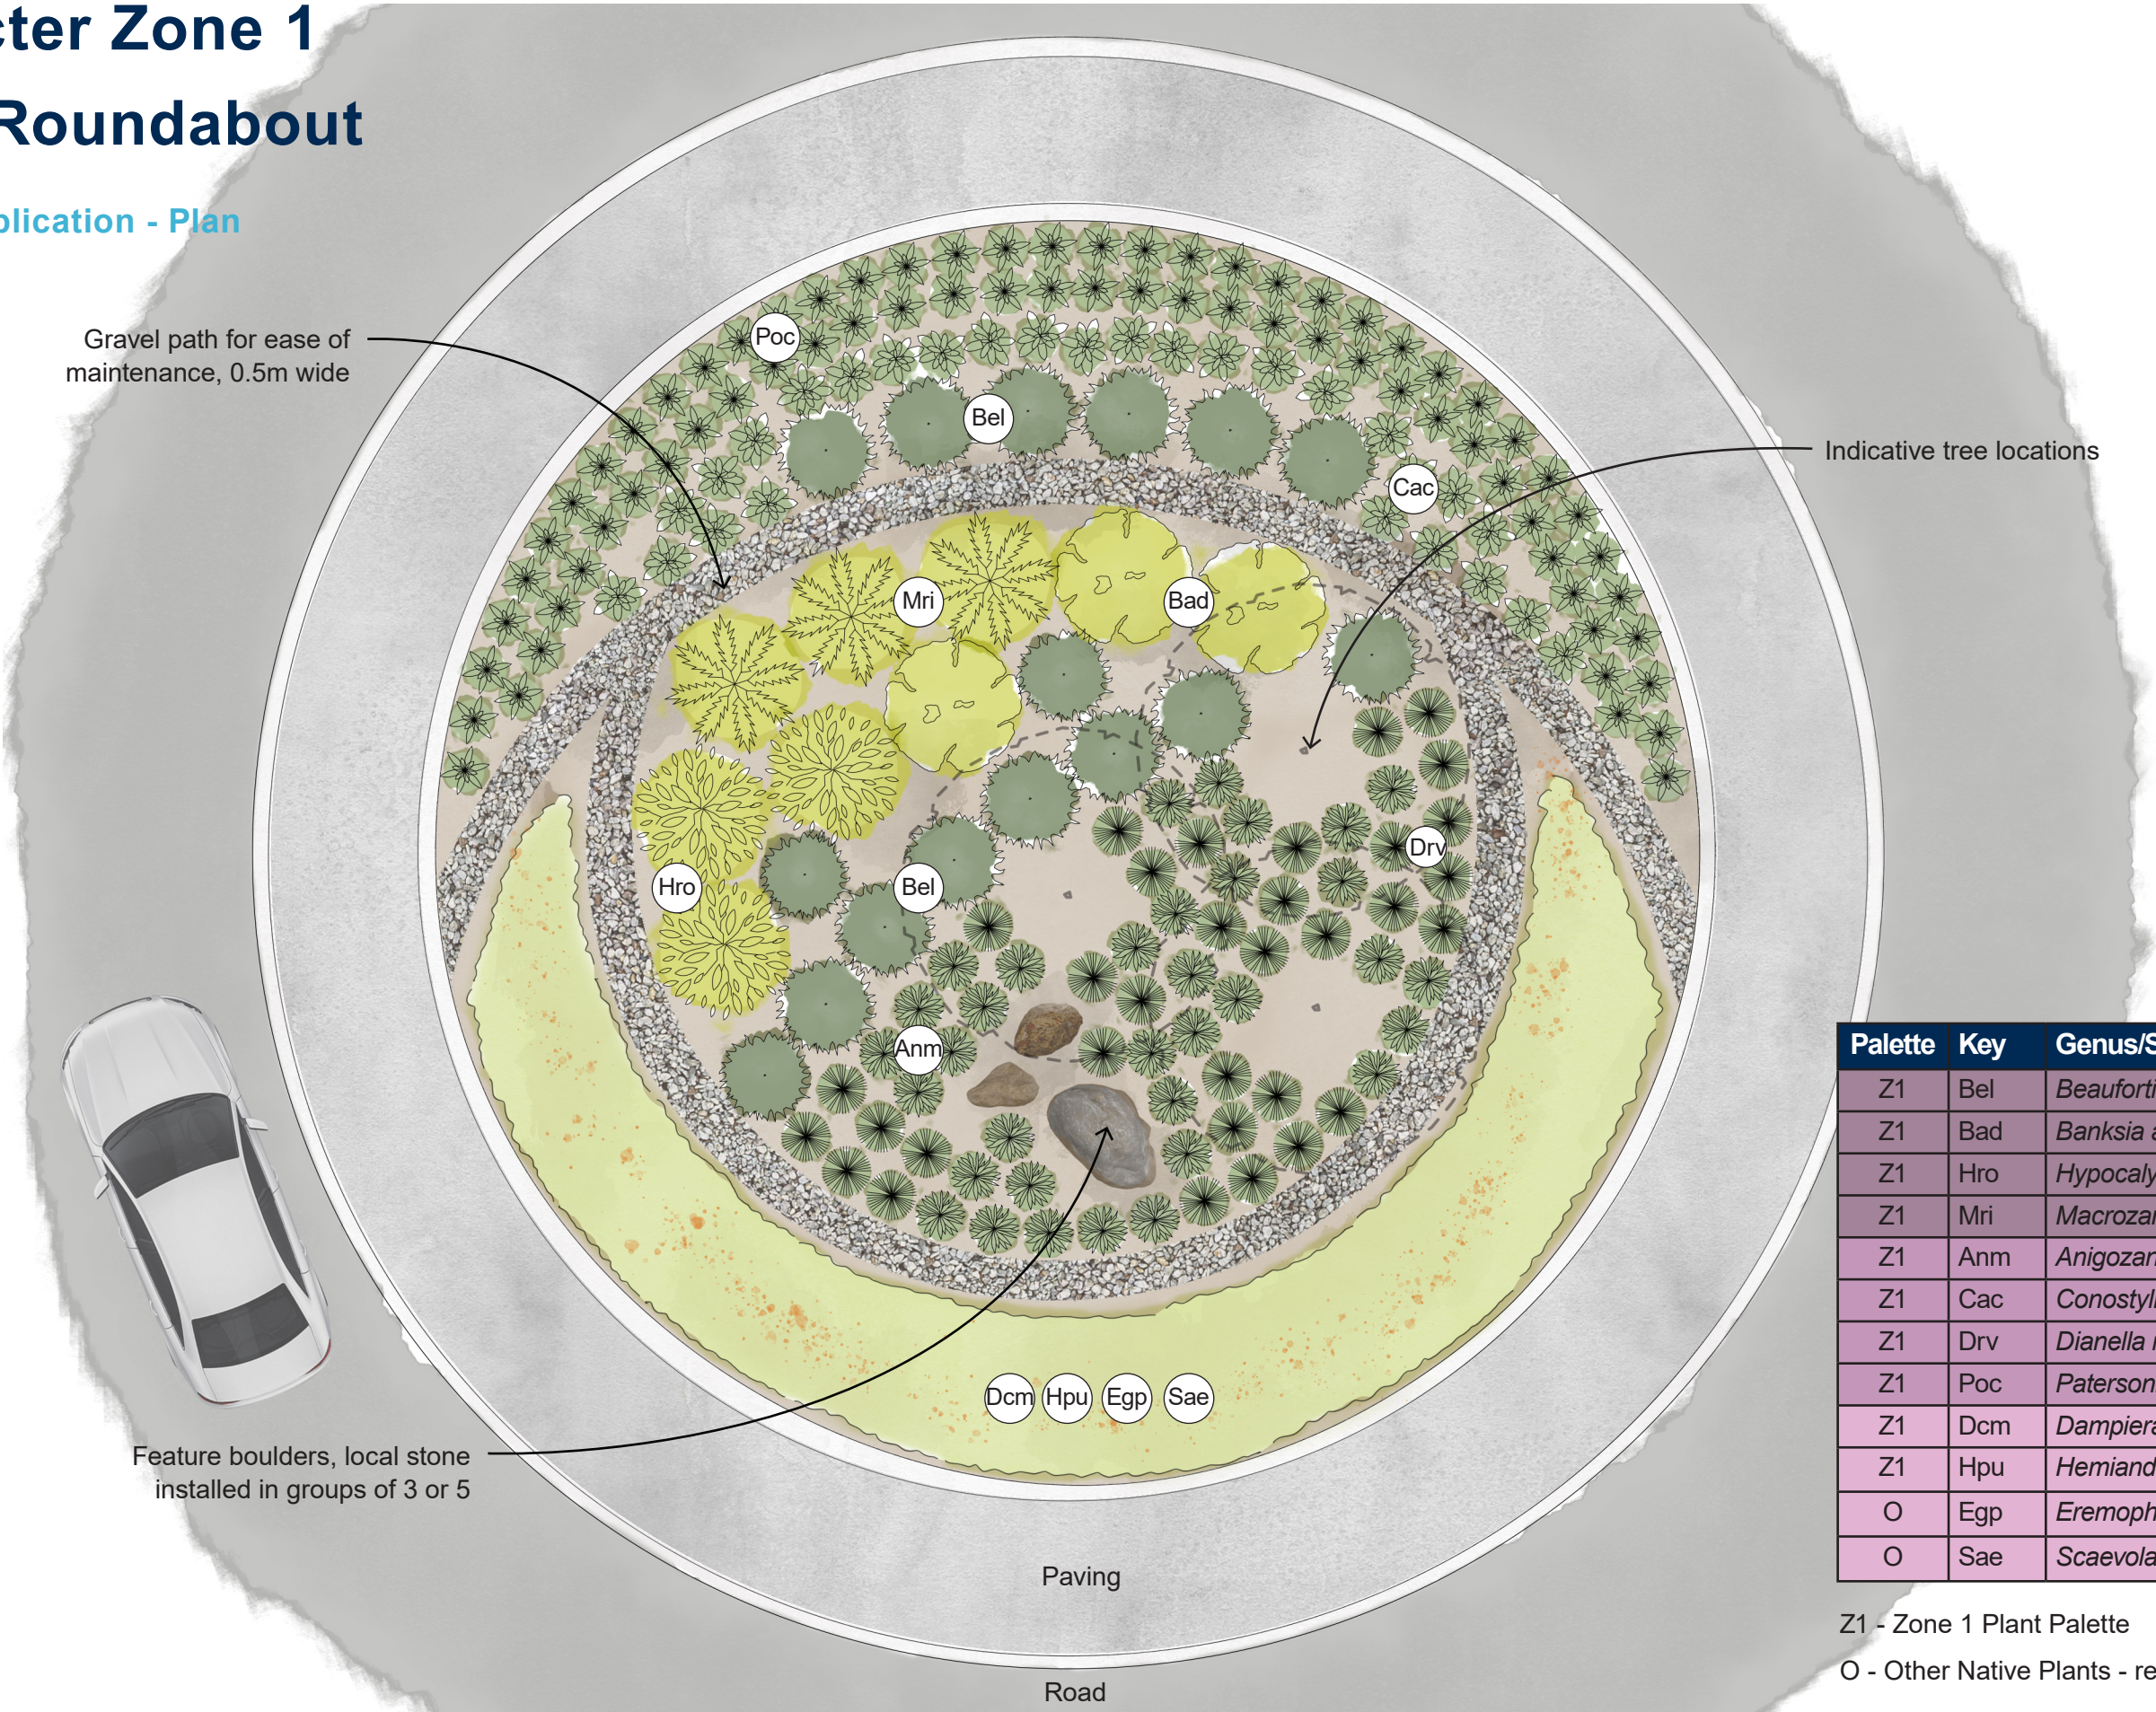

Z1 - Zone 1 Plant Palette

O - Other Native Plants - refer Supplementary Palette

Character Zone 1

Cul-de-sacs

Example Application - Plan



Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z1	Bad	<i>Banksia attenuata</i> dwarf
Z1	Gsc	<i>Gompholobium scabrum</i>
O	Lfo	<i>Leptospermum laevigatum</i> 'Foreshore'
O	Lsn	<i>Leucophyta brownii</i> 'Silver Nugget'
Z1	Cca	<i>Conostylis candidans</i>
Z1	Dre	<i>Dianella revoluta</i>
Z1	Ola	<i>Orthrosanthus laxus</i>
O	Aeg	<i>Anigozanthos hybrid</i> 'KP02' Everlasting Gold
Z1	Dwb	<i>Dampiera linearis</i> 'Western Blue'/'Blue'
O	Cte	<i>Calytrix tetragona</i> postrate
O	Egc	<i>Eremophila glabra</i> compactum
O	Ggc	<i>Grevillea crithmifolia</i> 'Green Carpet'

Z1 - Zone 1 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 1

Cul-de-sacs


Example Application - Perspective



Character Zone 1

Public Access Ways

Example Application - Plan

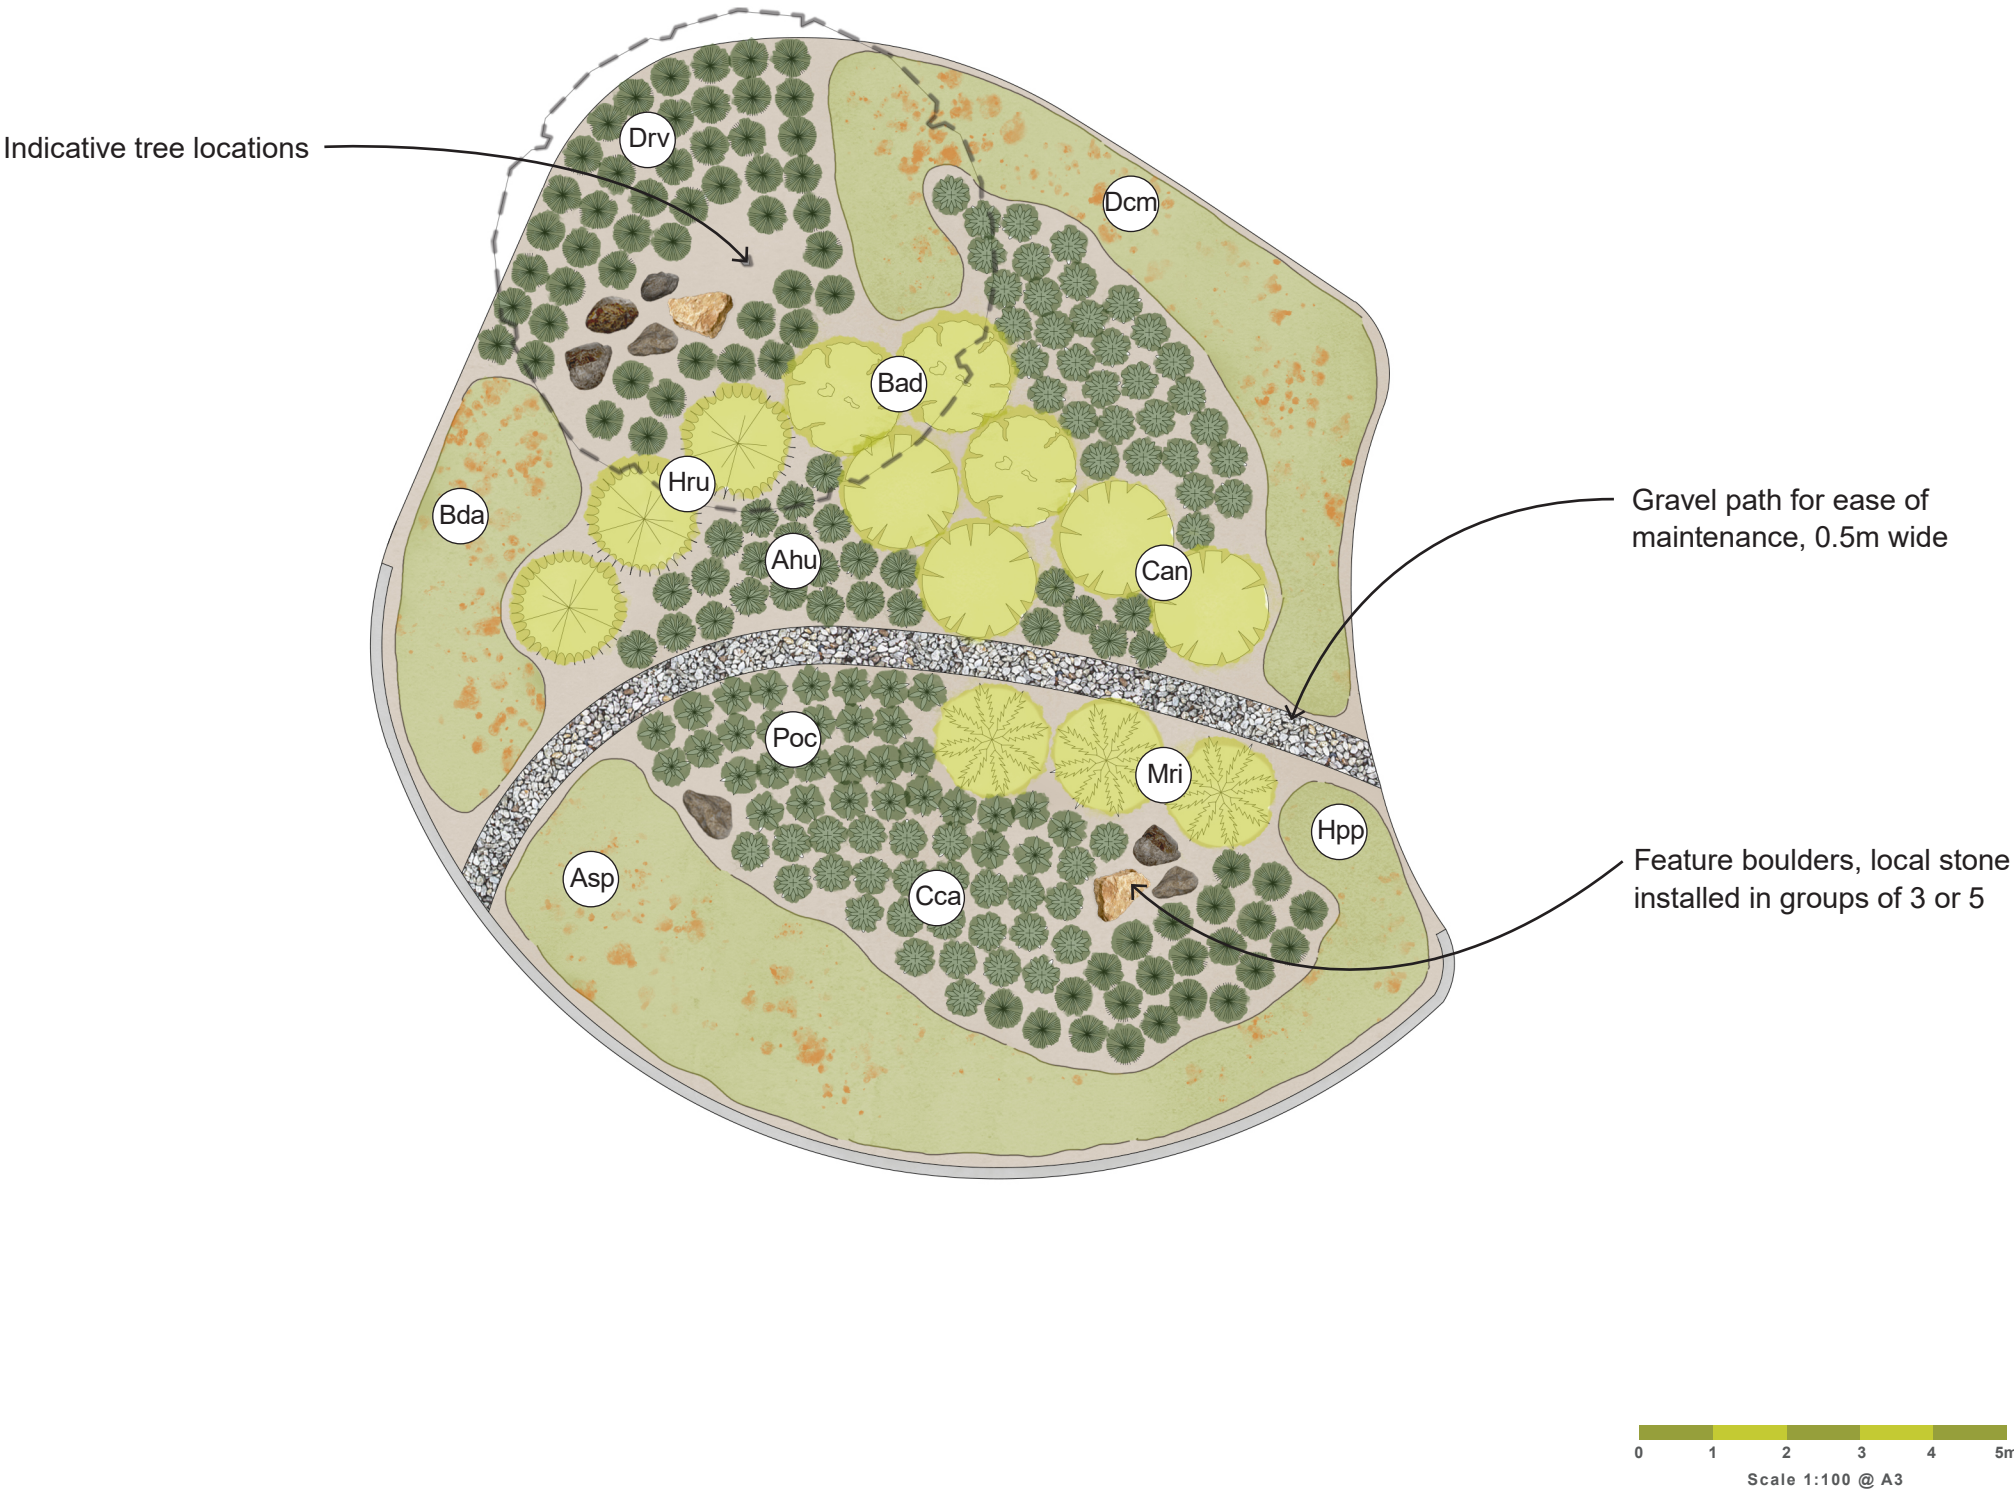

Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z1	Bad	<i>Banksia attenuata dwarf</i>
Z1	Can	<i>Calytrix angulata</i>
Z1	Hru	<i>Hakea ruscifolia</i>
Z1	Mri	<i>Macrozamia riedlei</i>
Z1	Ahu	<i>Anigozanthos humilis</i>
Z1	Cca	<i>Conostylis candicans</i>
Z1	Drv	<i>Dianella revoluta 'Revelation'</i>
Z1	Poc	<i>Patersonia occidentalis</i>
Z1	Asp	<i>Acacia saligna prostrate</i>
Z1	Bda	<i>Banksia dallanayi</i>
Z1	Dcm	<i>Dampiera linearis 'Cobalt Mound'</i>
Z1	Hpp	<i>Hemiandra pungens purpurea</i>

Z1 - Zone 1 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 1

Public Access Ways

Example Application - Perspective





Character Zone 1

Public Access Ways

Example Application - Plan



Context Plan (1:500 scale)

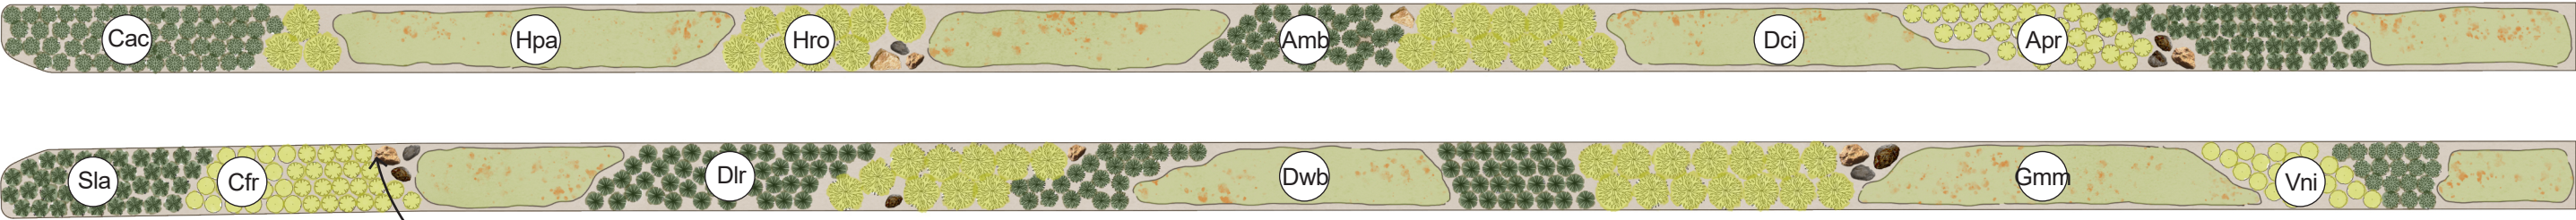

Feature boulders, local stone
installed in groups of 3 or 5

Palette	Key	Genus/Species
Z1	Apr	<i>Aotus procumbens</i>
Z1	Cfr	<i>Calytrix fraseri</i>
Z1	Hro	<i>Hypocalymma robustum</i>
Z1	Vni	<i>Verticordia nitens</i>
Z1	Amb	<i>Anigozanthos manglesii</i> x 'Bush Dance'
Z1	Cac	<i>Constylis aculeata</i>

Palette	Key	Genus/Species
Z1	Dlr	<i>Dianella revoluta</i> 'Little Rev'
Z1	Sla	<i>Stirlingia latifolia</i>
Z1	Hpa	<i>Hemiandra pungens alba</i>
Z1	Dwb	<i>Dampiera linearis</i> 'Western Blue'
O	Dci	<i>Darwinia citriadora</i> 'Seaspray'
O	Gmm	<i>Grevillea thelemanniana</i> 'Mini Marvel'


Z1 - Zone 1 Plant Palette

O - Other Native Plants - refer Supplementary Palette

Character Zone 1

Parks & Gardens

Example Application - Plan

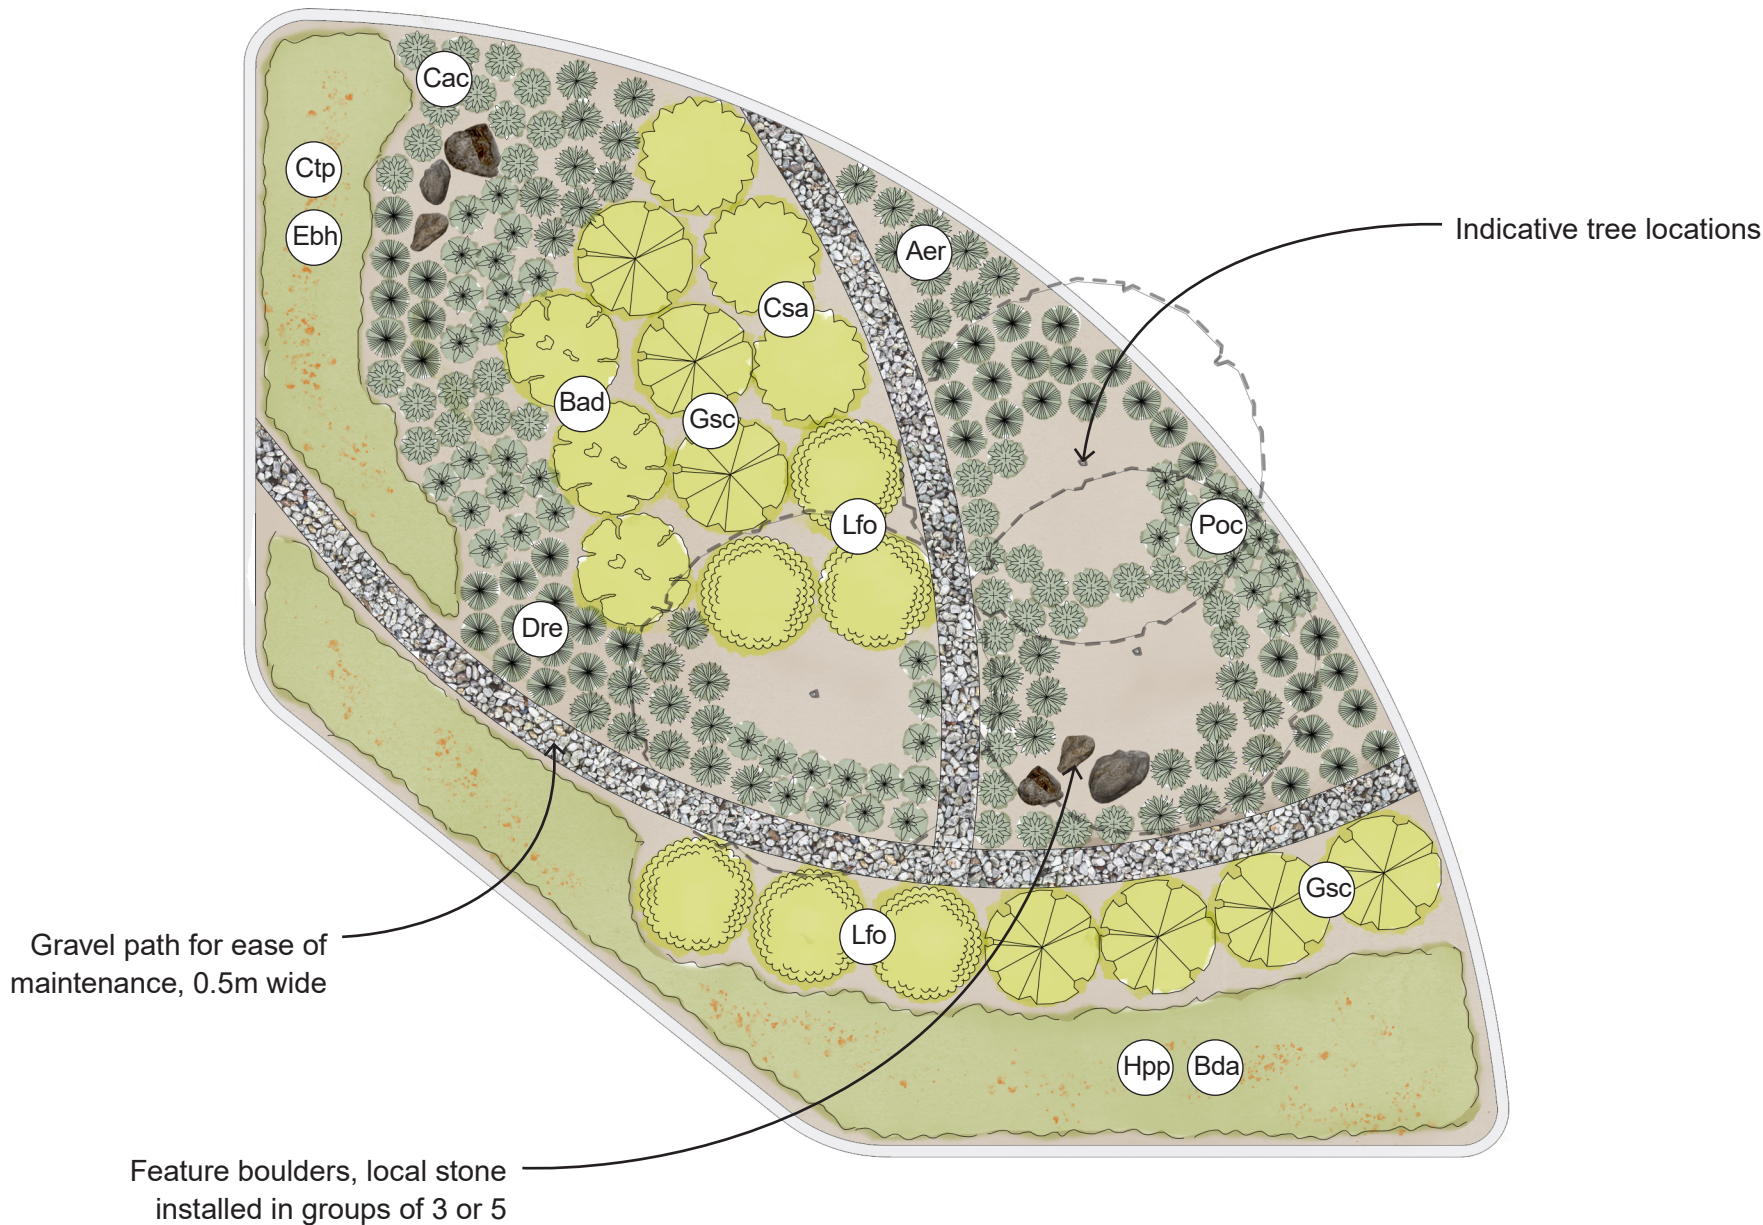

Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z1	Bad	<i>Banksia attenuata</i> dwarf
Z1	Csa	<i>Calothamnus sanguineus</i>
Z1	Gsc	<i>Gompholobium scabrum</i>
O	Lfo	<i>Leptospermum laevigatum</i> 'Foreshore'
Z1	Cac	<i>Constylis aculeata</i>
Z1	Dre	<i>Dianella revoluta</i>
Z1	Poc	<i>Patersonia occidentalis</i>
O	Aer	<i>Anigozanthos hybrid</i> 'Everlasting Red'
Z1	Bda	<i>Banksia dallanneyi</i>
Z1	Hpp	<i>Hemiandra pungens purpurea</i>
O	Ctp	<i>Calytrix tetragona postrate</i>
O	Ebh	<i>Eremophila glabra</i> 'Blue Horizon'

Z1 - Zone 1 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 1

Parks & Gardens

Example Application - Perspective



Character Zone 1

Parks & Gardens

Example Application - Plan



Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z1	Bad	<i>Banksia attenuata dwarf</i>
Z1	Ber	<i>Bossiaea eriocarpa</i>
Z1	Mri	<i>Macrozamia riedlei</i>
O	Cwa	<i>Callistemon citrinus 'White Anzac'</i>
Z1	Ahu	<i>Anigozanthos humilis</i>
Z1	Ola	<i>Orthrosanthus laxus</i>
Z1	Xpr	<i>Xanthorrhoea preissii</i>
O	Dva	<i>Dianella hybrid Variegated</i>
Z1	Asp	<i>Acacia saligna 'prostrate'</i>
O	Bpe	<i>Banksia petiolaris</i>
O	Erd	<i>Eremophila glabra 'Red Desert'</i>
O	Grc	<i>Grevillea nivea x variifolia 'Red Coral'</i>

Z1 - Zone 1 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 1

Parks & Gardens

Example Application - Perspective




Character Zone 2

Characteristics

Based on GIS research, the area between Whatley Crescent and Morley Drive within the City has been classified as Character Zone 2.

This zone has been defined by the predominantly Bassendean soil geology system and surface geology system of S8/S10 sand with Cp's peaty clay areas. In response to this, the plant pallet for Zone 2 comprises species native to the Bassendean Sands vegetation complex with a focus on species found in the peaty clay areas.

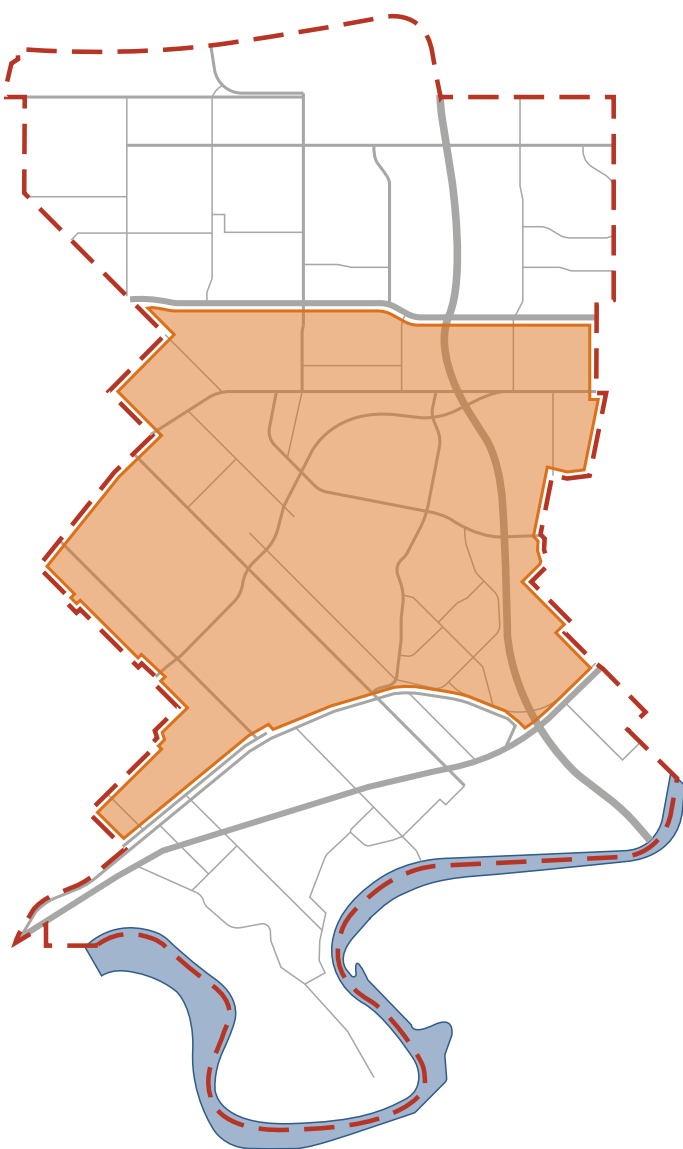

Banksia menziesii (Firewood Banksia)

Character Zone 2

Plant Pallet - Shrubs

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application						
										Small R.A.B	Medium R.A.B	Large R.A.B	Cul-de-sac	P.A.W.	Civic Space	Parks
	Shrubs															
Bassendean Sands/Swamps	Ade	Acacia dentifera	Toothed Wattle	1 to 3	1 to 2	1	FS/PS	Win/Spr	✓✓✓							✓
	Asa	Acacia saligna	Orange Wattle/ Coojong	2 to 6	3 to 5	3	FS	Win/Spr	✓✓✓							✓
	Aac	Actinostrobus acuminatus	Dwarf Cypress	0.5	0.5	0.5	FS/PS	All year	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Apy	Actinosrobus pyramidalis	Swamp Cypress	1 to 4	1 to 2	1.5	FS/PS	All year	✓✓✓						✓	✓
	Agr	Aotus gracillima	N/A	1	0.5	0.5	FS/PS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Apr	Aotus procumbens	N/A	0.5	0.5	0.5	FS/PS	Win/Spr	✓✓✓		✓	✓	✓	✓		✓
	Asc	Astartea scoparia	Common Astartea	1.5	1.5	1.2	FS/PS	Sum	✓✓✓				✓	✓	✓	✓
	Bad	Banksia attenuata dwarf	Dwarf Bull Banksia	1	2	1.5	FS/PS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Bmd	Banksia menziesii dwarf	Dwarf Firewood Banksia	1	1.5	1.5	FS	Aut/Win	✓✓✓		✓	✓	✓	✓	✓	✓
	Bel	Beaufortia elegans	Elegant Beaufortia	1	1	0.8	FS	Win/Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Cqu	Calothamnus quadrifidus	One-sided Bottlebrush	2	2	1.5	FS/PS	Win/Spr/Sum	✓✓✓				✓	✓	✓	✓
	Cqd	Calothamnus quadrifidus dwarf	One-sided Bottlebrush	1	1.5	1.2	FS/PS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Epa	Eremaea pauciflora	N/A	0.5 - 1.5	1 - 1.5	1	FS	Win/Spr/Sum	✓✓✓				✓	✓	✓	✓
	Gsc	Gompholobium scabrum	Painted Lady	0.5	0.5	0.5	FS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hva	Hakea varia	Variable Leaved Hakea	3	2	1.5	FS	Win/Spr	✓✓✓						✓	✓
	Htr	Hovea trisperma	Common Hovea	0.5	0.2	0.2	FS/PS	Aut/Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Han	Hypocallyma angustifolia	White Myrtle	1	1	0.8	FS/PS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Jfu	Jacksonia furcellata	Grey Stinkwood	3	2	1.5	FS/PS	Win/Spr/Sum	✓✓✓				✓	✓	✓	✓
	Jst	Jacksonia sternbergiana	Green Stinkwood	3	2	1.5	FS/PS	All year	✓✓✓						✓	✓
	Kgl	Kunzea glabrescens	Spearwood	2 to 5	2 to 4	2	FS	Spr	✓✓✓						✓	✓
	Kre	Kunzea recurva	Purple Kunzea	0.3 to 1.5	1 to 1.5	1	FS	Win/Spr	✓✓✓					✓		✓
	Min	Melaleuca incana nana	Grey Honey Myrtle	1	1.5	1.2	FS/PS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Msy	Melaleuca systema prostrate	Coastal Honey Myrtle	0.5	1.5	1.2	FS	Win/Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Mte	Melaleuca teretifolia	Banbar	1 to 5	2 to 5	1.8	FS	Spr/Sum	✓✓✓							✓
	Pel	Pericalymma ellipticum	Swam Tea Tree	1 to 2	1.5	1.2	FS	Spr/Sum	✓✓✓							✓
	Psp	Philoteca spicata	Salt and Pepper	0.5	0.3	0.3	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Pre	Pultenaea reticulata	N/A	2	1.5	1.2	FS/PS/Sh	Win/Spr/Sum	✓✓✓				✓	✓	✓	✓
	Rci	Regelia ciliata	Regelia	1 to 2.5	1 to 1.5	1	FS	Spr/Sum	✓✓✓							✓
	Tli	Taxandria linearifolia	Swamp Peppermint	2 to 5	1 to 2	1.5	FS/PS	Spr/Sum	✓✓✓							✓
	Vde	Verticordia densiflora	Compacted Featherflower	1	0.5	0.5	FS/PS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Vju	Viminaria juncea	Swish Bush	1 to 4	1 to 2	1.5	FS	Spr/Sum	✓✓✓					✓	✓	✓

Sun/Shade Conditions		Waterwise	
FS	Full Sun	✓✓✓	Waterwise
PS	Part Shade	✓✓	Waterwise once established
Sh	Shade	✓	Requires irrigation

Character Zone 2

Plant Pallet - Strappy Plants

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application						
										Small R.A.B	Medium R.A.B	Large R.A.B	Cul-de-sac	P.A.W.	Civic Space	Parks
	Strappy Plants															
Bassendean Sands/Swamps	Bju	Baumea juncea	Bare Twig-rush	1	1	0.8	FS	Spr/Sum	✓	✓	✓	✓	✓	✓	✓	✓
	Bva	Baumea vaginalis	Sheath Twig-sedge	1.2	1.2	0.8	FS	Spr	✓	✓	✓	✓	✓	✓	✓	✓
	Bco	Burchardia congesta	Milmaids	0.5	0.3	0.3	FS/PS	Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Cap	Carex appressa	Tall Sedge	1	1	0.8	FS/PS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Cca	Conostylis candicans	Grey Cottonheads	0.4	0.4	0.3	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Cac	Constylis aculeata	Prickly Conostylis	0.4	0.4	0.3	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Dtr	Dampiera trigona	Dampiera	0.75	0.4	0.3	FS	Win/Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Dbr	Dasypogon bromeliifolius	Pineapple Bush	0.5	0.5	0.5	FS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Dre	Dianella revoluta	Flax Lily	1	1	0.8	FS/PS	Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Dlr	Dianella revoluta 'Little Rev'	Flax Lily Little Rev	0.4	0.4	0.5	FS/PS/Sh	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Drv	Dianella revoluta 'Revelation'	Flax Lily Revelation	0.5	0.5	0.5	FS/PS/Sh	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Ice	Isolepis cernua	Nodding Club Rush	0.3	0.3	0.3	FS/PS	Win/Spr/Sum	✓	✓	✓	✓	✓	✓	✓	✓
	Jpa	Juncus pallidus	Giant Rush	2	1	0.8	FS/PS	Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Llo	Lepidosperma longitudinale	Pithy Sword Sedge	2	1	0.8	FS/PS	Aut/Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Pci	Phlebocarya ciliata	N/A	0.3	0.3	0.3	FS/PS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Xpr	Xanthorrhoea preissii	Grass Tree	1.5	1	1	FS	Win/Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓

Sun/Shade Conditions		Waterwise	
FS	Full Sun	✓✓✓	Waterwise
PS	Part Shade	✓✓	Waterwise once established
Sh	Shade	✓	Requires irrigation

Character Zone 2

Plant Pallet - Groundcovers

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application						
										Small R.A.B	Medium R.A.B	Large R.A.B	Cul-de-sac	P.A.W.	Civic Space	Parks
	Strappy Plants															
Bassendean Sands/Swamps	Asp	<i>Acacia saligna prostrate</i>	Coojong Groundcover	0.2	2	1	FS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hpu	<i>Hemiandra pungens</i>	Snake Bush	0.3	1.5	1	FS/PS	Spr/Sum/Aut	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hpa	<i>Hemiandra pungens alba</i>	Snake Bush White	0.3	1.5	1	FS/PS	Sum/Aut	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hpp	<i>Hemiandra pungens purpurea</i>	Snake Bush Purple	0.3	1.5	1	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Jca	<i>Jacksonia calcicola (prostrate)</i>	N/A	0.15	1	1	FS/PS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Lan	<i>Lobelia aniceps</i>	Angled Lobelia	0.3	0.3	0.3	FS/PS	Aut	✓	✓	✓	✓	✓	✓	✓	✓

Sun/Shade Conditions		Waterwise	
FS	Full Sun	✓✓✓	Waterwise
PS	Part Shade	✓✓	Waterwise once established
Sh	Shade	✓	Requires irrigation

Character Zone 2

Shrubs



Aotus procumbens



Astartea scoparia



Calothamnus quadrifidus dwarf



Eremaea pauciflora



Gompholobium scabrum



Hakea varia



Hypocallyma angustifolia



Jacksonia furcellata



Kunzea recurva



Melaleuca incana nana



Melaleuca systema



Pericalymma ellipticum



Philotea spicata



Taxandria linearifolia




Verticordia densiflora

Strappy Plants



Carex apressa

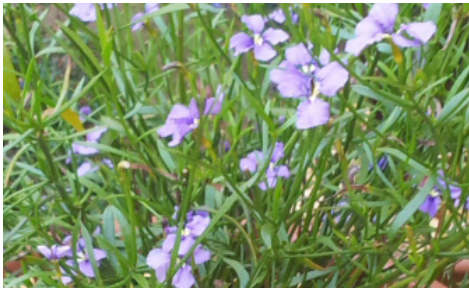

Dampiera trigona



Dianella revoluta 'Revelation'



Isolepis cernua



Phlebocarya ciliata

Groundcovers



Conostylis candicans



Dasypogon bromeliifolius



Dianella revoluta 'Little Rev'



Lepidosperma longitudinale



Xanthorrhoea preissii



Acacia saligna prostrate



Hemiandra pungens



Hemiandra pungens alba



Hemiandra pungens purpurea




Jacksonia calcicola prostrate

Character Zone 2

Small Roundabout

Example Application - Plan

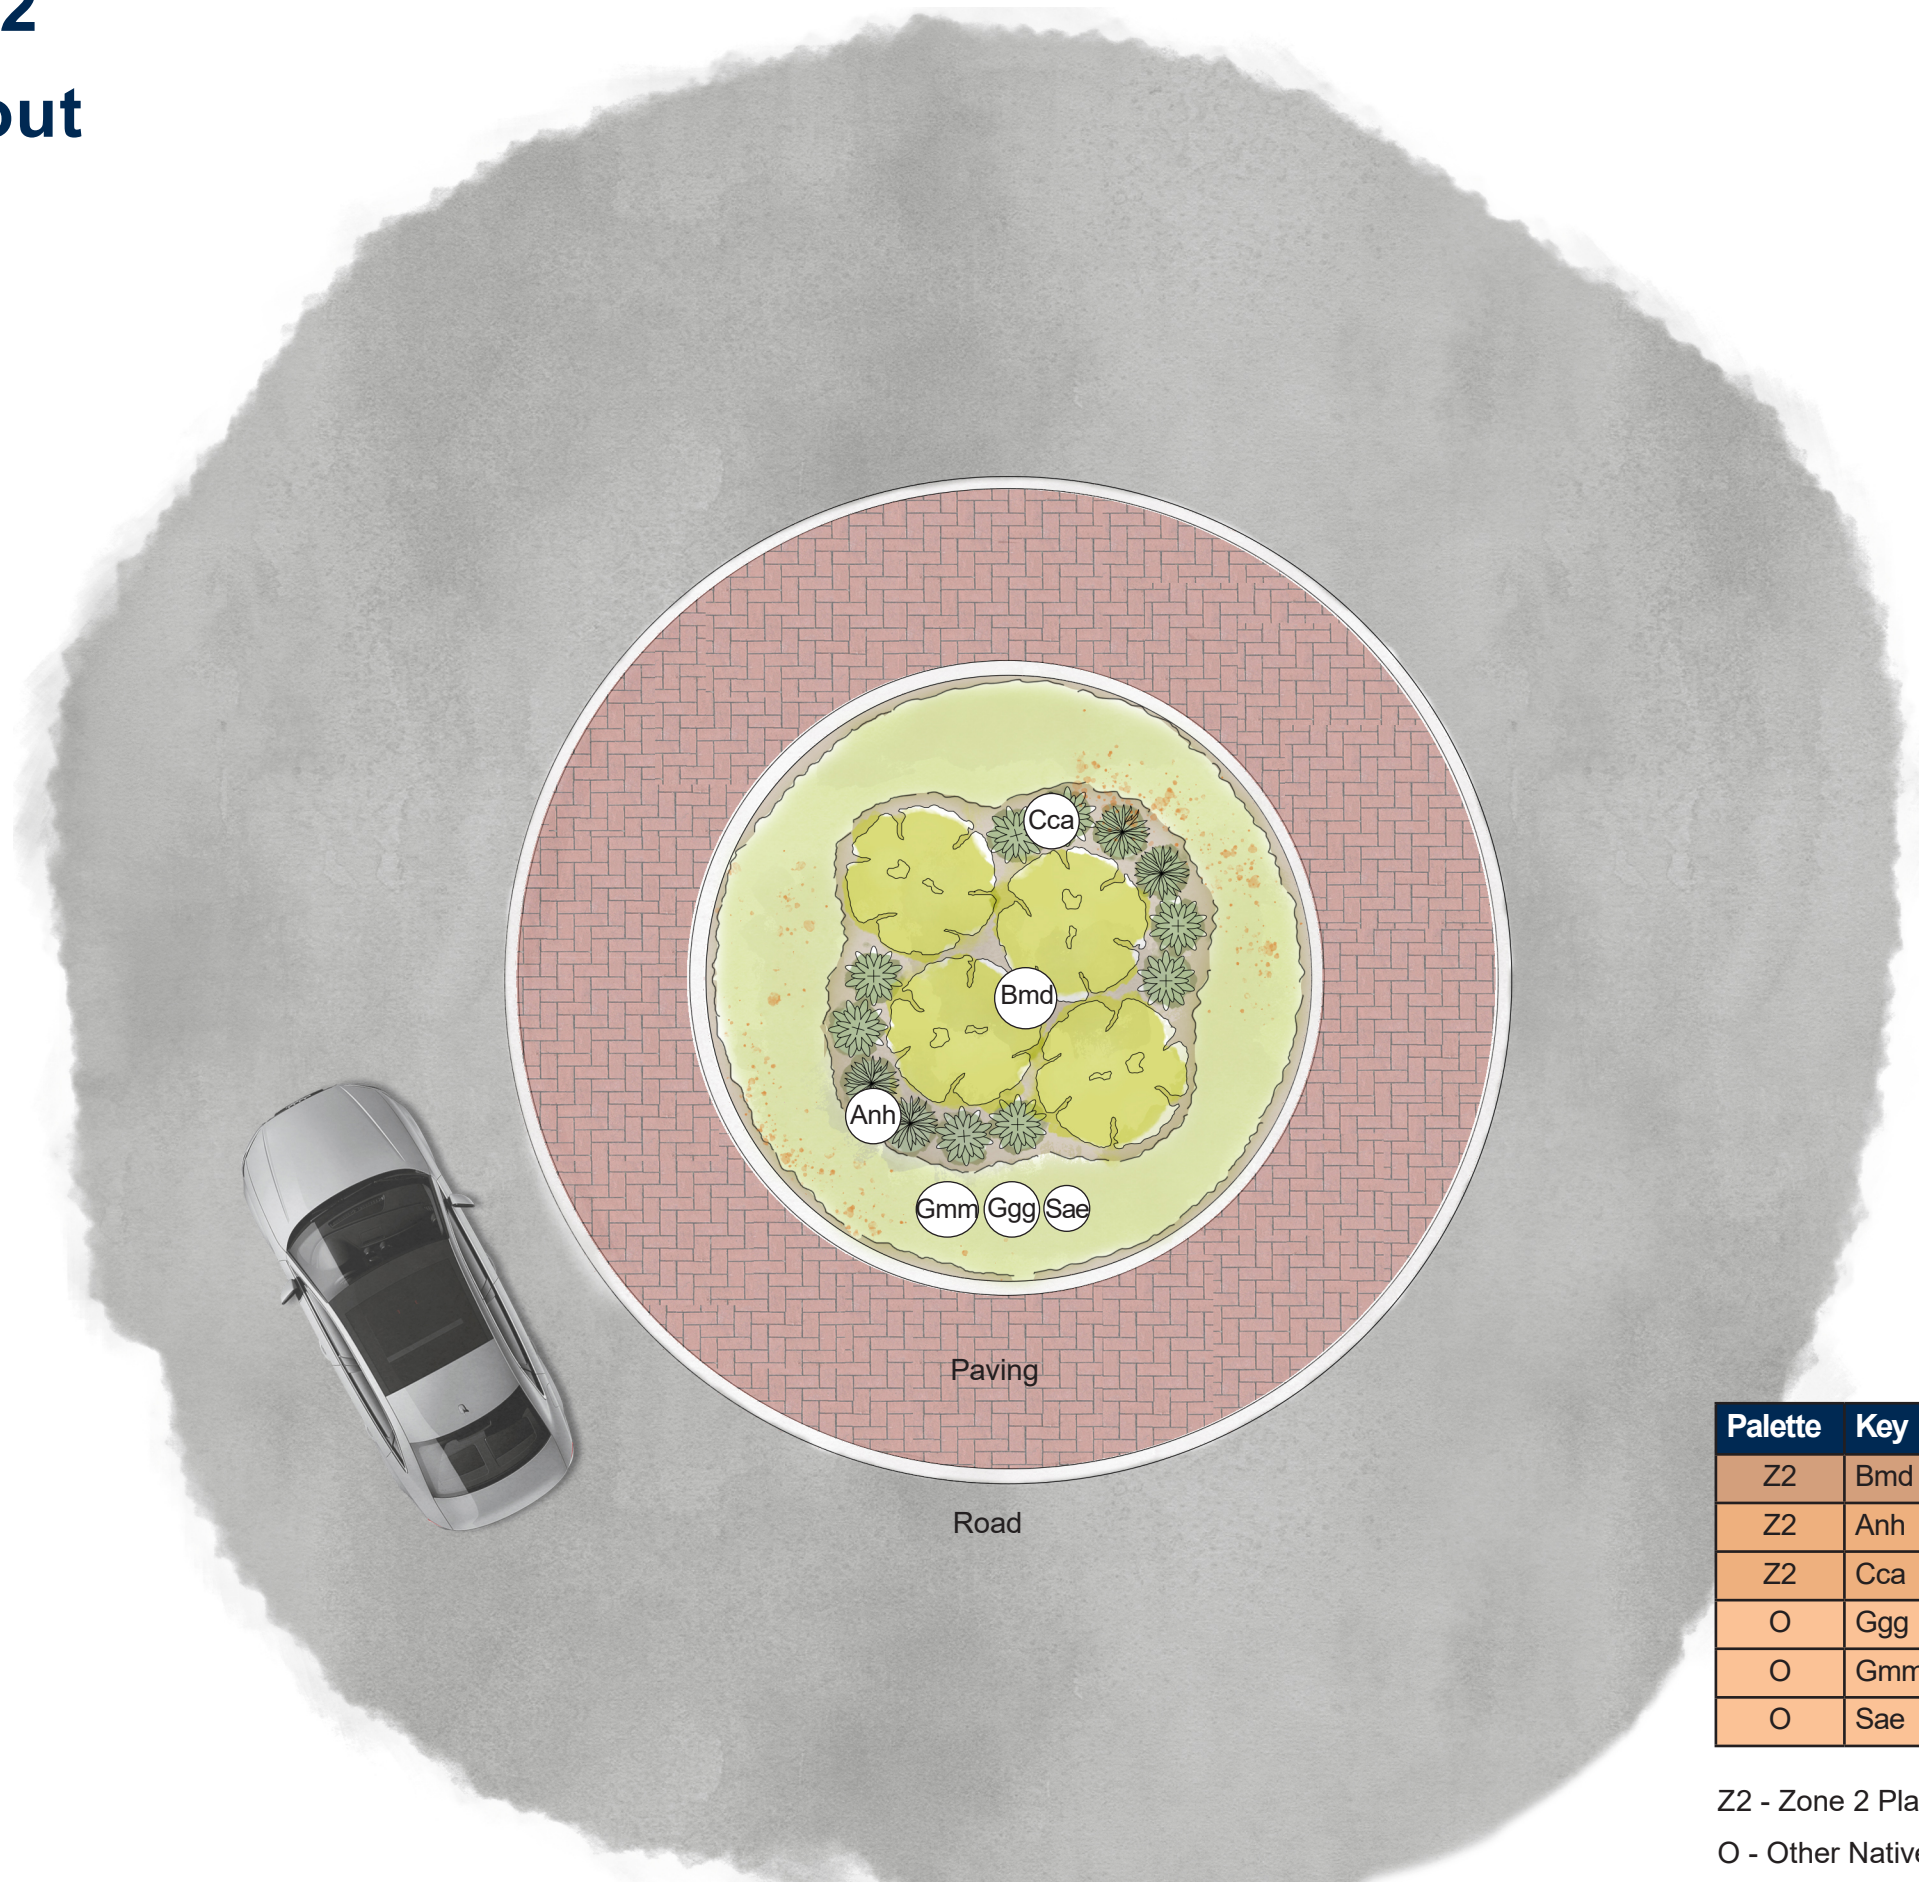


Palette	Key	Genus/Species
Z2	Bmd	<i>Banksia menziesii</i> dwarf
Z2	Anh	<i>Anigozanthos humilis</i>
Z2	Cca	<i>Conostylis candicans</i>
O	Ggg	<i>Grevillea obtusifolia</i> “Gin Gin Gem”
O	Gmm	<i>Grevillea thelemanniana</i> “Mini Marvel”
O	Sae	<i>Scaevola aemula</i> “Kings Park Midnight”

Z2 - Zone 2 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 2

Medium Roundabout


Example Application - Plan

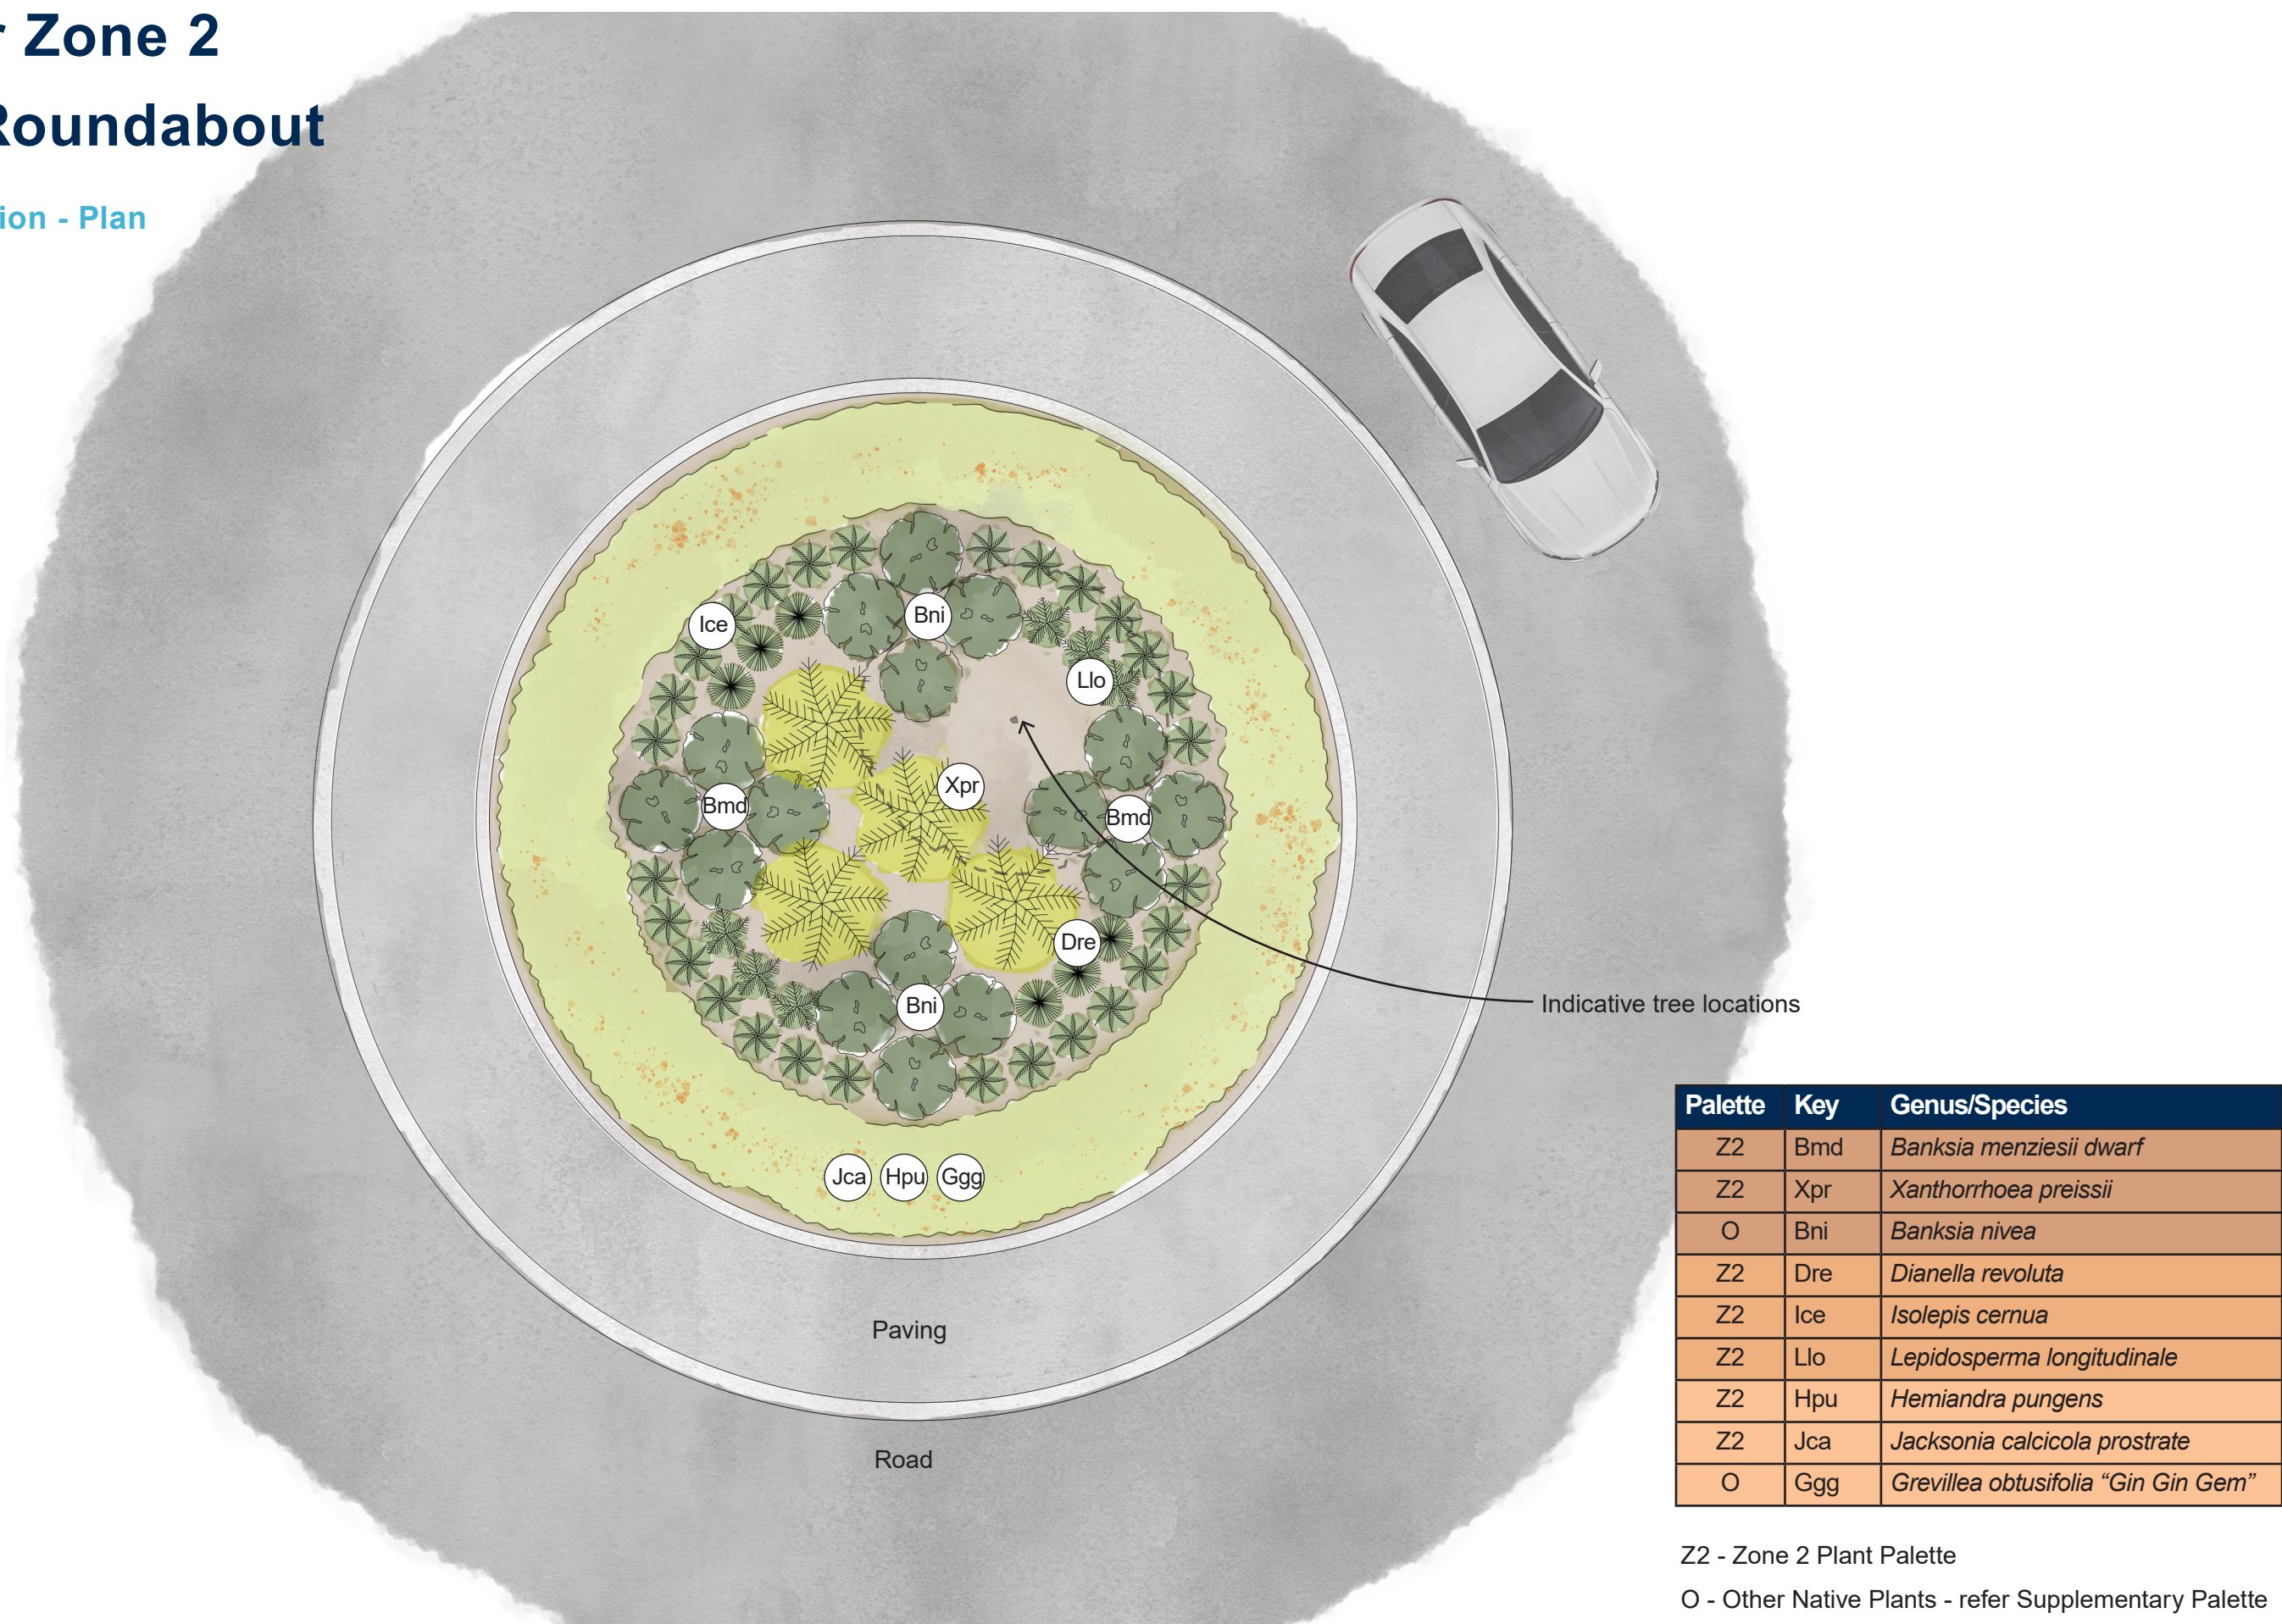

Character Zone 2

Large Roundabout

Example Application - Plan

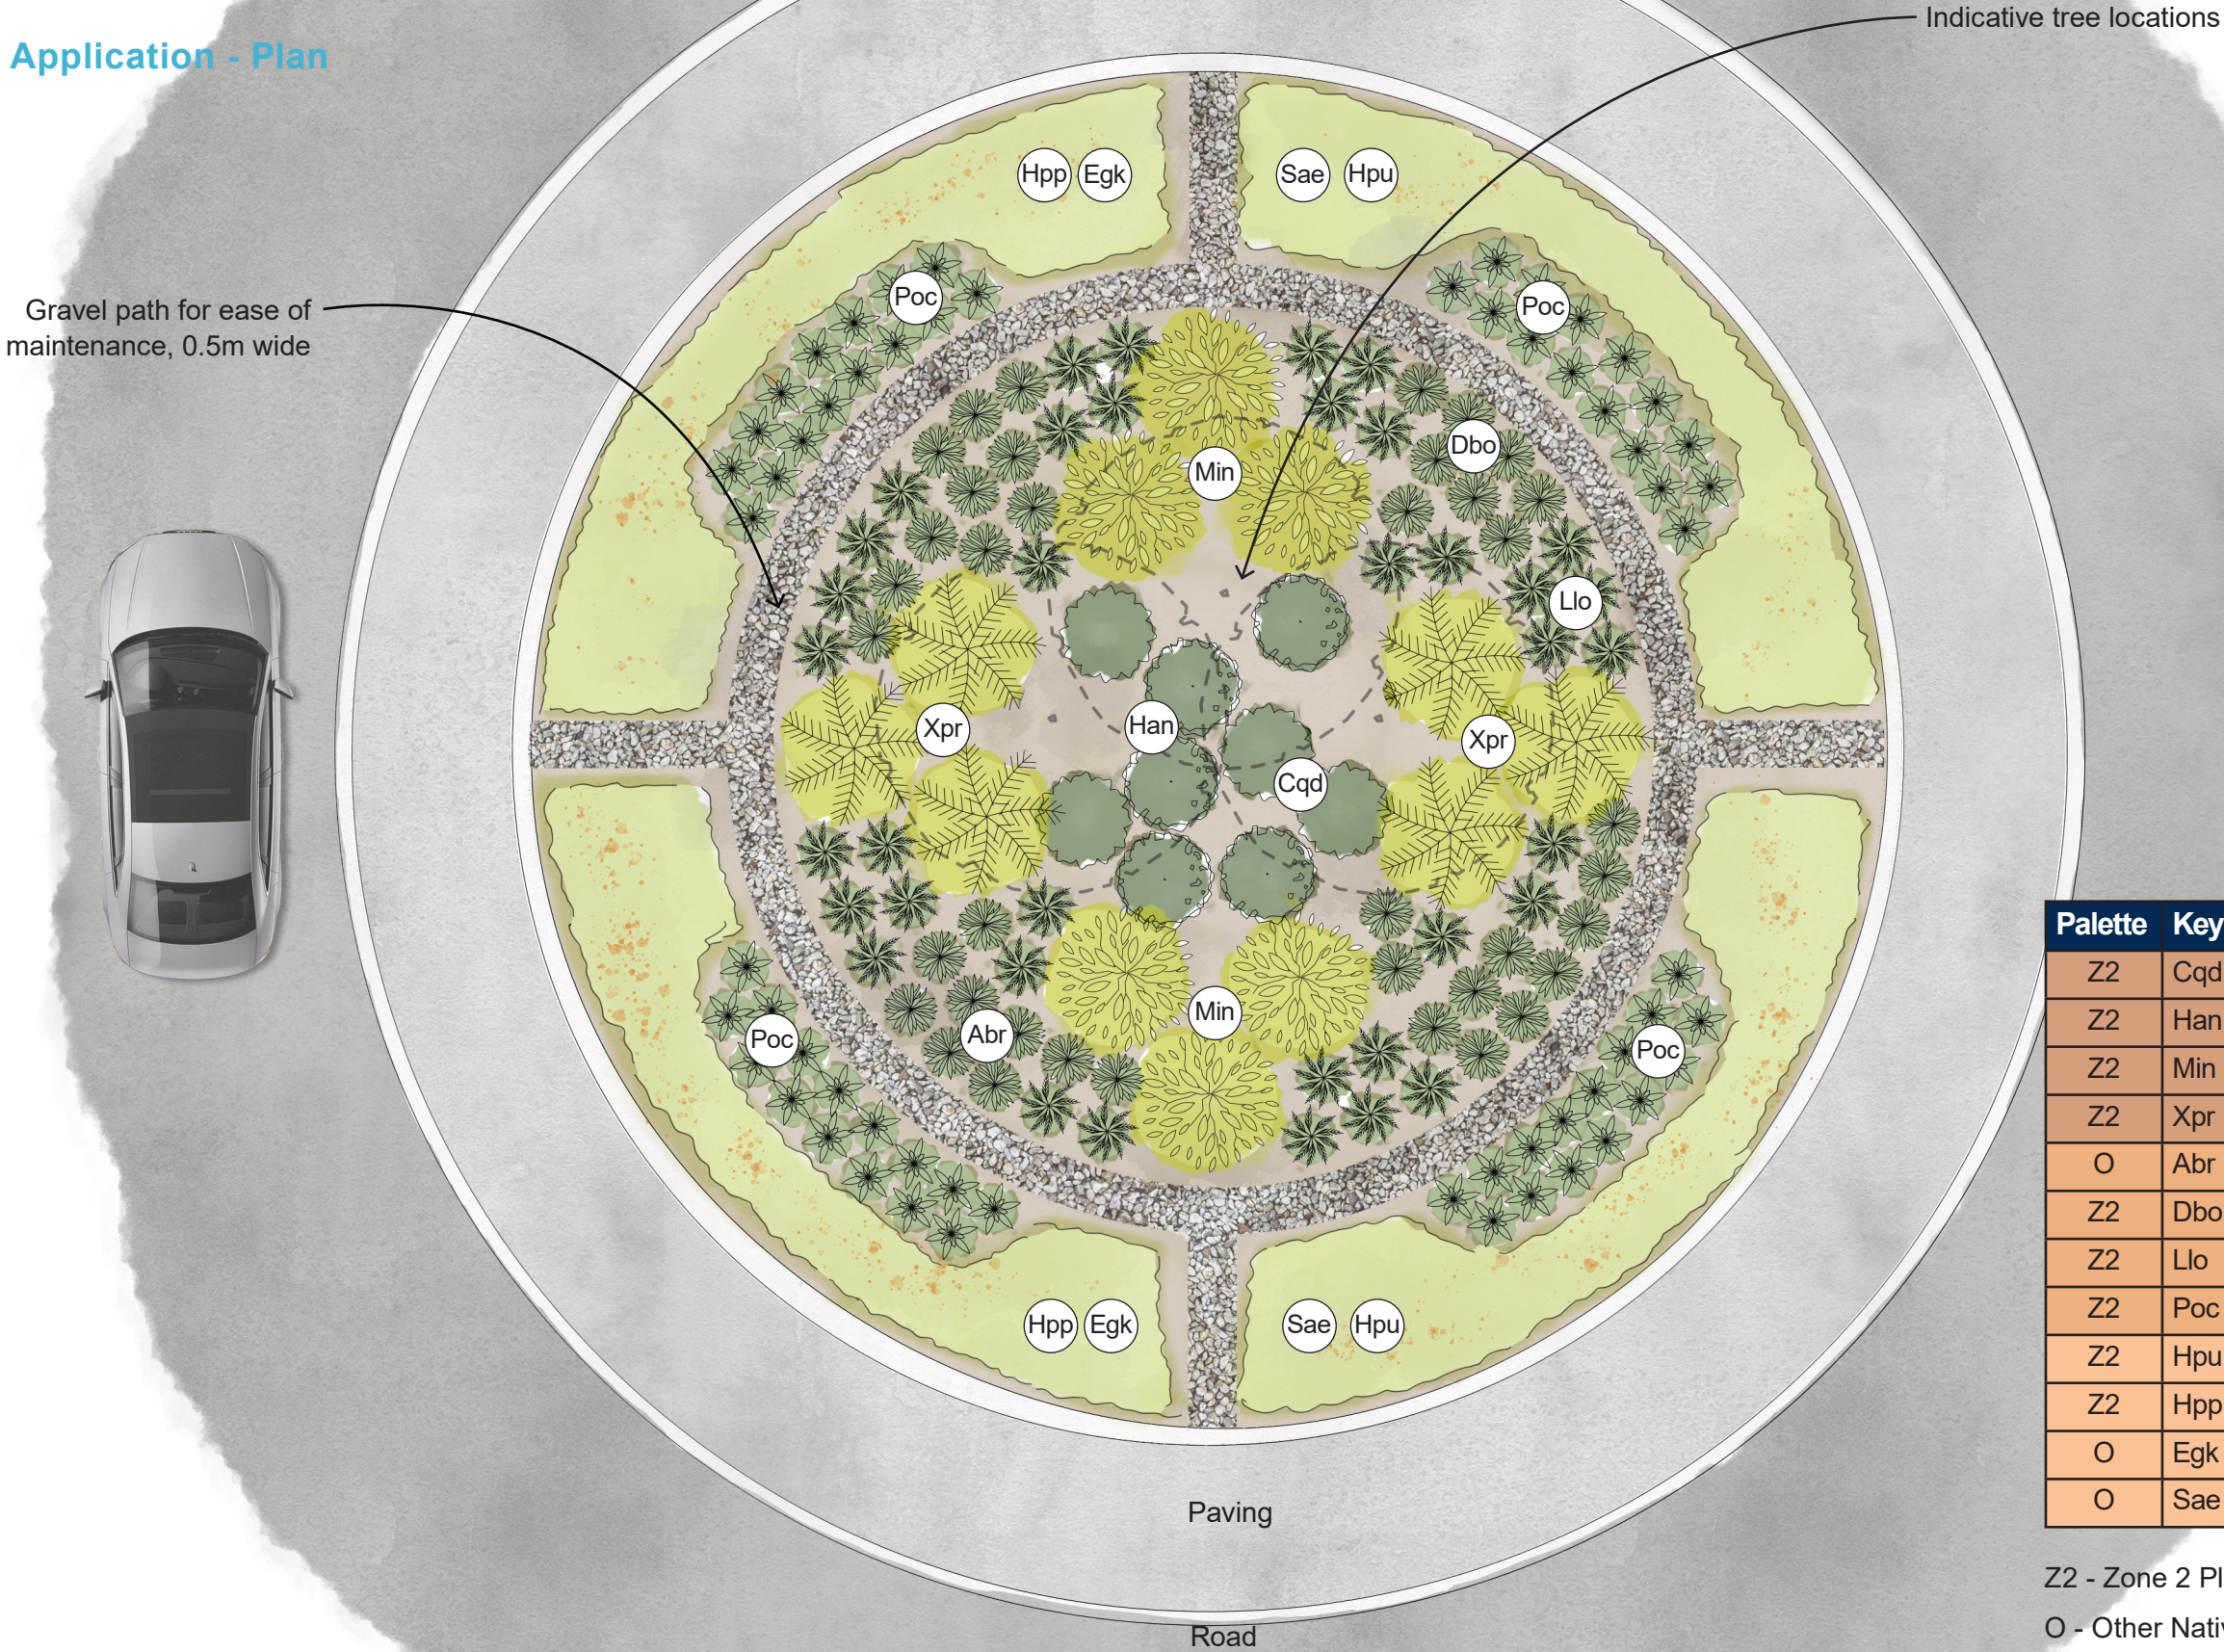

Palette	Key	Genus/Species
Z2	Cqd	<i>Calothamnus quadrifidus dwarf</i>
Z2	Han	<i>Hypocallyma angustifolia</i>
Z2	Min	<i>Melaleuca incana nana</i>
Z2	Xpr	<i>Xanthorrhoea preissii</i>
O	Abr	<i>Anigozanthos hybrid 'Bush Rampage'</i>
Z2	Dbo	<i>Dasypogon bromeliifolius</i>
Z2	Llo	<i>Lepidosperma longitudinale</i>
Z2	Poc	<i>Patersonia occidentalis</i>
Z2	Hpu	<i>Hemiandra pungens</i>
Z2	Hpp	<i>Hemiandra pungens purpurea</i>
O	Egk	<i>Eremophila glabra "Kalbarri Carpet"</i>
O	Sae	<i>Scaevola aemula "Kings Park Midnight"</i>

Z2 - Zone 2 Plant Palette

O - Other Native Plants - refer Supplementary Palette

Character Zone 2

Large Roundabout

Example Application - Perspective



Character Zone 2

Cul-de-sacs

Example Application - Plan



Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z2	Bmd	<i>Banksia menziesii</i> dwarf
Z2	Jst	<i>Jacksonia sternbergiana</i>
O	Cco	<i>Chorizema cordatum</i>
O	Egd	<i>Eremophila glabra</i> 'Dawes'
Z2	Dtr	<i>Dampiera trigona</i>
Z2	Drv	<i>Dianella revoluta</i> 'Revelation'
O	Aer	<i>Anigozanthos hybrid</i> 'Everlasting Red'
O	Lgl	<i>Lepidosperma gladiatum</i> 'Gladiator'
Z2	Asp	<i>Acacia saligna</i> prostrate
O	Gcp	<i>Grevillea crithmifolia</i> prostrate
O	Spp	<i>Scaevola striata</i> 'Pink Perfections'
O	Wlh	<i>Westringia fruticosa</i> 'Low Horizon'

Z2 - Zone 2 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 2

Cul-de-sacs

Example Application - Perspective



Character Zone 2

Public Access Ways

Example Application - Plan



Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z2	Bmd	<i>Banksia menziesii</i> dwarf
Z2	Epa	<i>Eremaea pauciflora</i>
Z2	Tli	<i>Taxandria linearifolia</i>
O	Ahb	<i>Acacia howittii</i> 'Honey Bun'
Z2	Cap	<i>Carex appressa</i>
Z2	Cca	<i>Conostylis candicans</i>
Z2	Dbr	<i>Dasypogon bromliifolius</i>
O	Abr	<i>Anigozanthos</i> hybrid 'Bush Rampage'
Z2	Hpu	<i>Hemiandra pungens</i>
O	Bbl	<i>Banksia blechnifolia</i>
O	Ekc	<i>Eremophila glabra</i> 'Kalbarri Carpet'
O	Ggg	<i>Grevillea obtusifolia</i> 'Gin Gin Gem'

Z2 - Zone 2 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 2

Public Access Ways

Example Application - Perspective



Character Zone 2

Public Access Ways

Example Application - Plan




Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z2	Bmd	<i>Banksia menziesii</i> dwarf
Z2	Han	<i>Hypocallyma angustifolia</i>
Z2	Kre	<i>Kunzea recurva</i>
Z2	Min	<i>Melaleuca incana</i> nana
Z2	Dtr	<i>Dampiera trigona</i>
Z2	Dre	<i>Dianella revoluta</i>
Z2	Pci	<i>Phlebocarya ciliata</i>
Z2	Xpr	<i>Xanthorrhoea preissii</i>
Z2	Asp	<i>Acacia saligna</i> prostrate
Z2	Hpp	<i>Hemiandra pungens</i> purpurea
O	Bpe	<i>Banksia petiolaris</i>
O	Ebh	<i>Eremophila glabra</i> 'Blue Horizon'

Z2 - Zone 2 Plant Palette

O - Other Native Plants - refer Supplementary Palette



Character Zone 2

Civic Space

Example Application - Plan



Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z2	Min	<i>Melaleuca incana nana</i>
O	Cgj	<i>Callistemon viminalis 'Green John'</i>
O	Hra	<i>Hibbertia racemosa</i>
O	Wab	<i>Westringia hybrid 'Aussie Box'</i>
Z2	Abf	<i>Anigozanthos hybrid 'Bush Fury'</i>
Z2	Dre	<i>Dianella revoluta 'Revelation'</i>
Z2	Dtr	<i>Dampiera trigona</i>
O	Lgg	<i>Lepidosperma gladiatum' Gladiator'</i>
O	Alp	<i>Acacia lasiocarpa prostrata</i>
O	Bbl	<i>Banksia blechnifolia</i>
O	Egp	<i>Eremophila glabra prostrata</i>
O	Spp	<i>Scaevola striata 'Pink Perfections'</i>

Z2 - Zone 2 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 2

Civic Space


Example Application - Perspective



Character Zone 2

Civic Space

Example Application - Plan

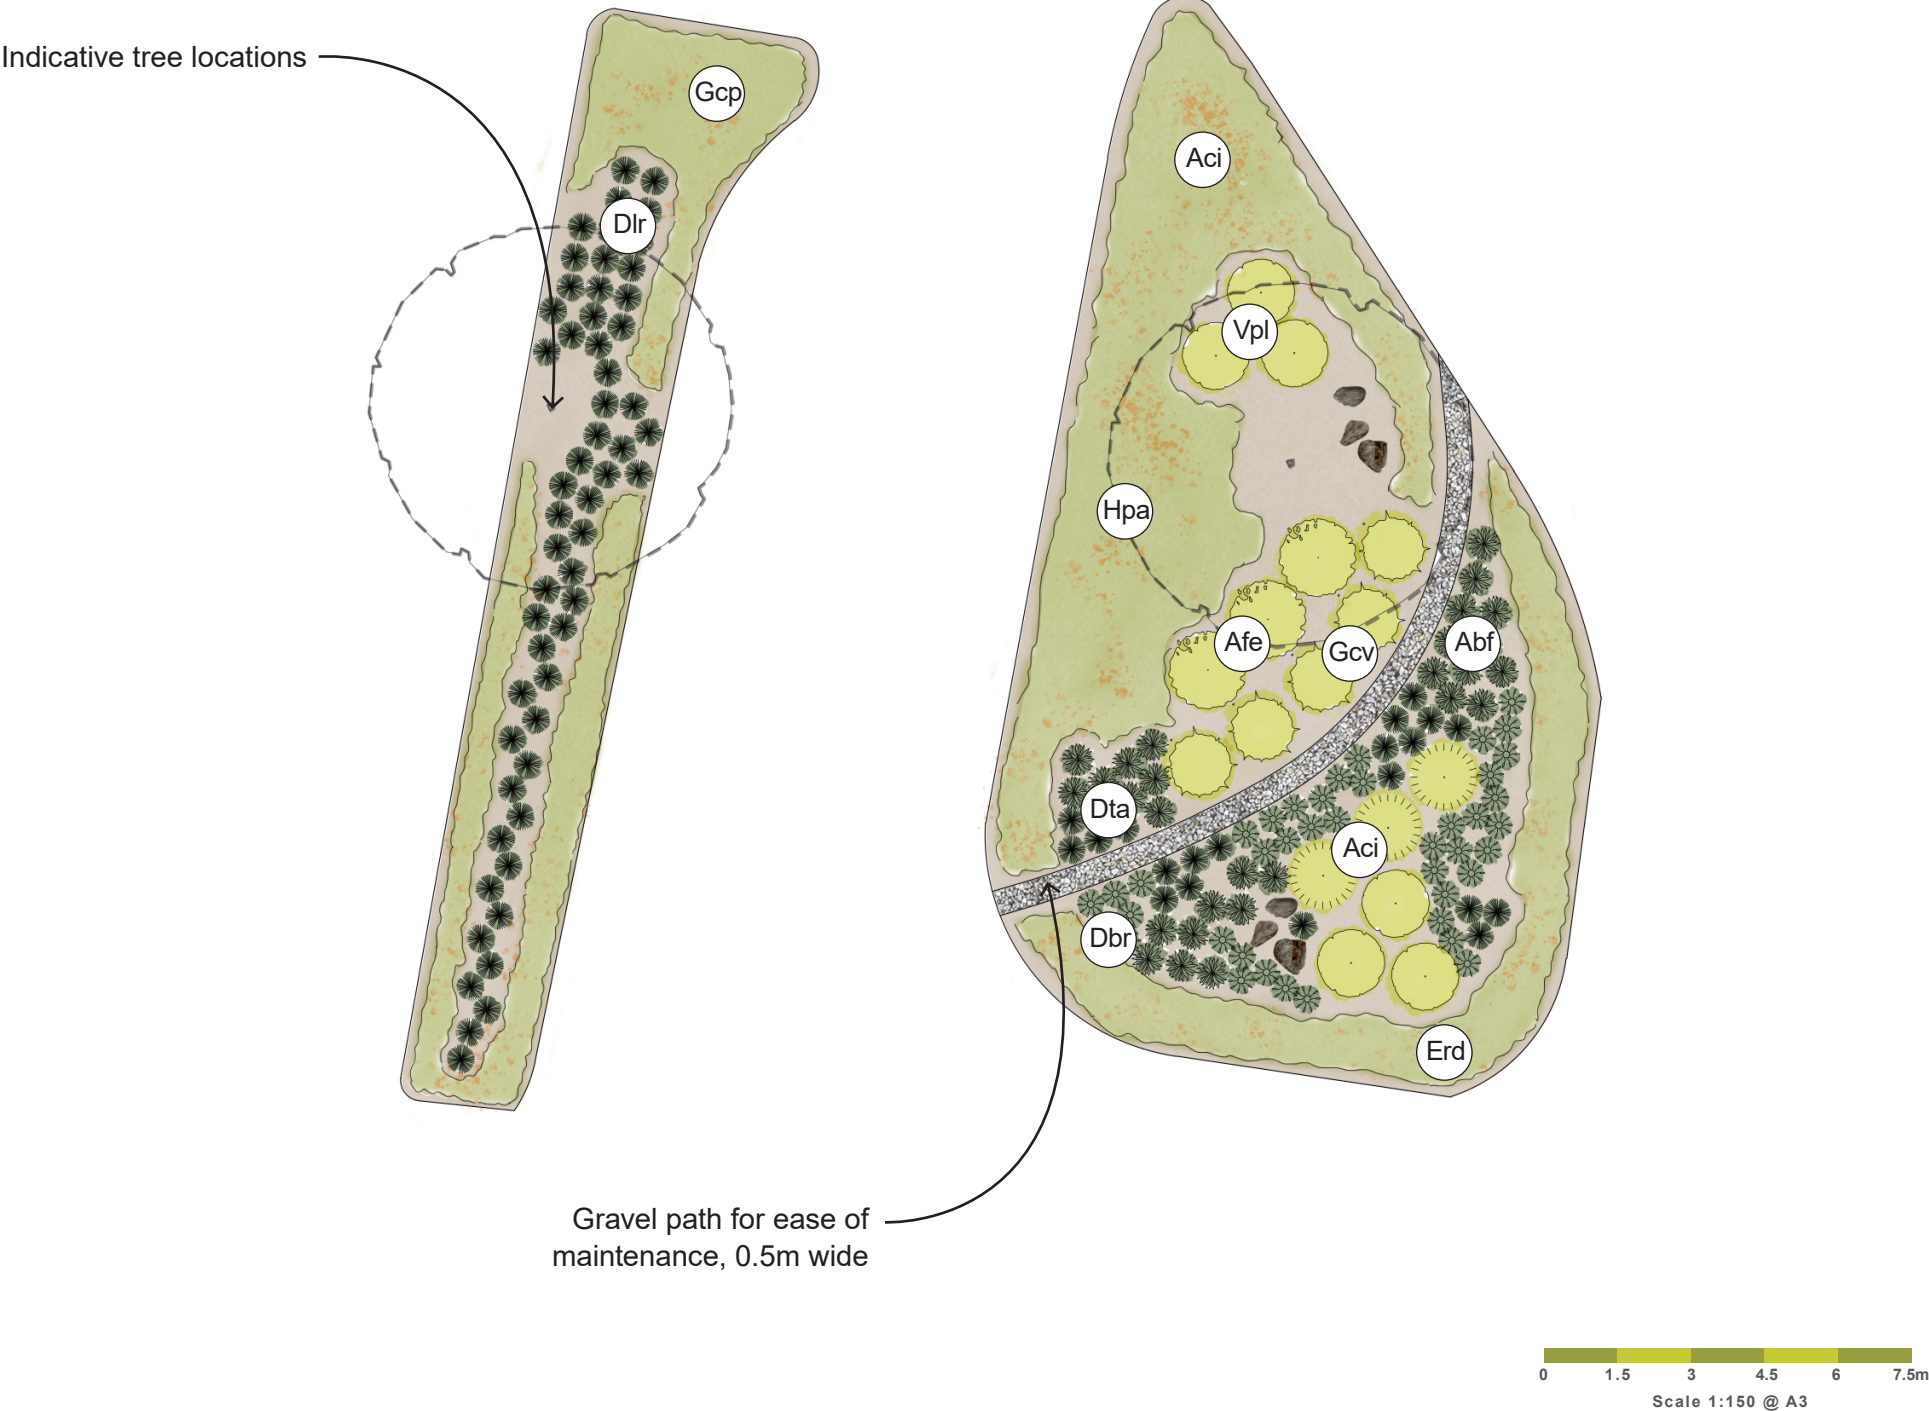

Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z2	Aci	<i>Atriplex cinerea</i>
Z2	Vpl	<i>Verticordia plumosa</i>
O	Afe	<i>Acacia cognata</i> 'Fettuccini'
O	Gcv	<i>Grevillea rosmarinifolia</i> 'Crimson Villea'
Z2	Dbr	<i>Dasypogon bromliifolius</i>
Z2	Dlr	<i>Dianella revoluta</i> 'Little Rev'
O	Abf	<i>Anigozanthos hybrid</i> 'Bush Fury'
O	Dta	<i>Dianella hybrid</i> Variegated
Z2	Hpa	<i>Hemiandra pungens alba</i>
O	Alp	<i>Acacia lasiocarpa prostrate</i>
O	Erd	<i>Eremophila glabra</i> 'Red Desert'
O	Gcp	<i>Grevillea crithmifolia prostrate</i>

Z2 - Zone 2 Plant Palette

O - Other Native Plants - refer Supplementary Palette

Character Zone 2

Civic Space

Example Application - Perspective



Character Zone 2 Parks & Gardens

Example Application - Plan



Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z2	Agr	<i>Aotus gracillima</i>
Z2	Asc	<i>Astartea scoparia</i>
Z2	Cqd	<i>Calothamnus quadrifidus dwarf</i>
Z2	Mla	<i>Melaleuca lateritia</i>
Z2	Dtr	<i>Dampiera trigona</i>
Z2	Dre	<i>Dianella revoluta</i>
Z2	Ice	<i>Isolepis cernua</i>
O	Abr	<i>Anigozanthos hybrid 'Bush Rampage'</i>
O	Ekc	<i>Eremophila glabra 'Kalbarri Carpet'</i>
O	Gco	<i>Grevillea hybrid 'Coverall'</i>
O	Ggc	<i>Grevillea crithmifolia 'Green Carpet'</i>
O	Skp	<i>Scaevola aemula 'Kings Park Midnight'</i>

Z2 - Zone 2 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 2

Parks & Gardens

Example Application - Perspective




Character Zone 3

Characteristics

Based on GIS research, the area south of Whatley Crescent, within the City, has been classified as Character Zone 3.

This zone consists of two soil and surface geology systems. In response to this, the plant pallet for Zone 3 comprises a mix of species native to the Guildford Vegetation Complex and Swan Vegetation Complex.

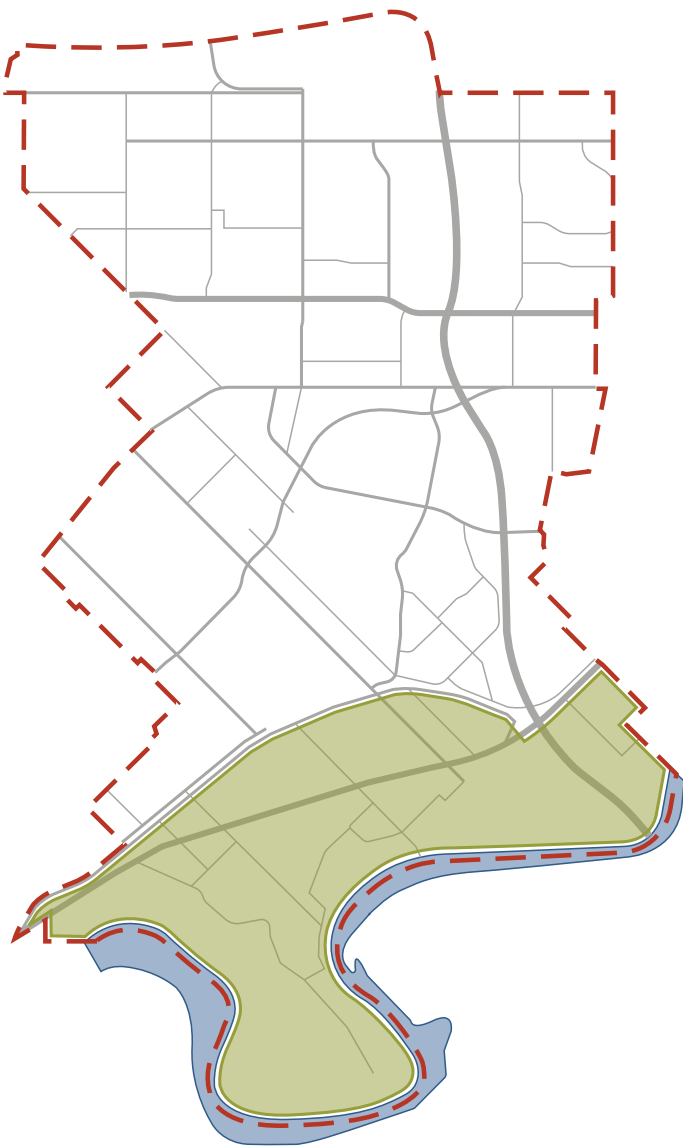

Banksia grandis (Bull Banksia)

Character Zone 3

Plant Pallet - Shrubs

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application						
										Small R.A.B	Medium R.A.B	Large R.A.B	Cul-de-sac	P.A.W.	Civic Space	Parks
	Shrubs															
Guildford/ Swan	Ade	<i>Acacia dentifera</i>	Toothed Wattle	1 to 3	1 to 2	1	FS/PS	Win/Spr	✓✓✓							✓
	Ase	<i>Acacia sessilis</i>	N/A	1	2	1.5	FS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Afn	<i>Agonis flexuosa nana</i>	Dwarf Willow Peppermint	1	1	1	FS/PS	Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Ahu	<i>Allocasuarina humilis</i>	Dwarf Sheoak	1.5	1.5	1.5	FS/PS	Aut/Win/Spr	✓✓✓				✓	✓	✓	✓
	Asc	<i>Astartea scoparia</i>	Common Astartea	1.5	1.5	1.2	FS/PS	Sum	✓✓✓				✓	✓	✓	✓
	Aci	<i>Atriplex cinerea</i>	Grey Saltbush	1.5	2	1.5	FS/PS/Sh	Spr	✓✓✓				✓	✓	✓	✓
	Bad	<i>Banksia attenuata dwarf</i>	Dwarf Bull Banksia	1	2	1.5	FS/PS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Bgd	<i>Banksia grandis dwarf</i>	Candle Banksia	1	2	1.5	FS/PS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Bmd	<i>Banksia menziesii dwarf</i>	Dwarf Firewood Banksia	1	1.5	1.5	FS	Aut/Win	✓✓✓		✓	✓	✓	✓	✓	✓
	Bel	<i>Beaufortia elegans</i>	Elegant Beaufortia	1	1	0.8	FS	Win/Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Bsq	<i>Beaufortia squarrosa</i>	Sand Bottlebrush	0.5 to 2	1 to 2	1	FS/PS	Sum/Aut	✓✓✓				✓	✓	✓	✓
	Ber	<i>Bossiaea eriocarpa</i>	Common Brown Pea	1	1	0.8	FS/PS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Bor	<i>Bossiaea ornata</i>	Broad-leaved Brown Pea	0.5	0.5	0.5	FS/PS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Cqd	<i>Calothamnus quadrifidus dwarf</i>	One-sided Bottlebrush	1	1.5	1.2	FS/PS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Chi	<i>Calothamnus hirsutus</i>	Hawkeswood	1	1.5	1.2	FS/PS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Csa	<i>Calothamnus sanguineus</i>	Silky Leaved Blood Flower	2	2	1.5	FS	Aut/Win/Spr	✓✓✓				✓	✓	✓	✓
	Can	<i>Calytrix angulata</i>	Yellow Starflower	1	1	0.8	FS/PS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Gca	<i>Gastrolobium capitatum</i>	Bacon and Eggs	0.5	1	0.8	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Gce	<i>Gastrolobium celsianum</i>	Swan River Pea	0.7	1	0.8	FS/PS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Hli	<i>Hakea lissocarpa</i>	Honey Bush	1.5	1	0.8	FS	Win/Spr	✓✓✓				✓	✓	✓	✓
	Htr	<i>Hakea trifurcata</i>	Two-leaf Hakea	2	2	1.5	FS	Win/Spr	✓✓✓		✓	✓	✓	✓		✓
	Hva	<i>Hakea varia</i>	Variable Leaved Hakea	3	2	1.5	FS	Win/Spr	✓✓✓		✓	✓	✓	✓		✓
	Han	<i>Hypocallyma angustifolia</i>	White Myrtle	1	1	0.8	FS/PS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Hro	<i>Hypocalymma robustum</i>	Swan River Myrtle	1.2	1	0.8	FS/PS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Jfu	<i>Jacksonia furcellata</i>	Grey Stinkwood	3	2	1.5	FS/PS	Win/Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Jst	<i>Jacksonia sternbergiana</i>	Green Stinkwood	3	2	1.5	FS/PS	All year	✓✓✓		✓	✓	✓	✓	✓	✓
	Kre	<i>Kunzea recurva</i>	Purple Kunzea	0.3 to 1.5	1 to 1.5	1	FS	Win/Spr	✓✓✓				✓	✓	✓	✓
	Mla	<i>Melaleuca lateritia</i>	Robin Redbreast Bush	1 to 2.5	1 to 2	1	FS	Spr/Sum/Aut	✓✓✓				✓	✓		✓
	Mse	<i>Melaleuca seriata</i>	N/A	1	1	0.8	FS	Win/Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Psp	<i>Philoteca spicata</i>	Salt and Pepper	0.5	0.5	0.5	FS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Tli	<i>Taxandria linearifolia</i>	Swamp Peppermint	2 to 5	1 to 2	1.5	FS/PS	Spr/Sum	✓✓✓				✓	✓		✓
	Tli	<i>Pimelia rosea</i>	Rose Banjine	1	1	0.8	FS/PS	Win/Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Vac	<i>Verticordia acerosa</i>	Yellow Plumed Feather Flower	1	1	0.8	FS	Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Vpl	<i>Verticordia plumosa</i>	Pink Plumed Feather Flower	1	1	0.8	FS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Vju	<i>Viminaria juncea</i>	Swish Bush	1 to 4	1 to 2	1.5	FS	Spr/Sum	✓✓✓				✓	✓	✓	✓

Character Zone 3

Plant Pallet - Strappy Plants

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application							
										Small R.A.B	Medium R.A.B	Large R.A.B	Cul-de-sac	P.A.W.	Civic Space	Parks	
	Strappy Plants																
Guildford/ Swan	Ahu	<i>Anigozanthos humilis</i>	Catspaw	0.5	0.5	0.3	FS/PS	Win/Spr	✓✓	✓	✓	✓	✓	✓	✓	✓	
	Ama	<i>Anigozanthos manglesii</i>	Mangles Kangaroo Paw	1	1	0.3	FS/PS	Win/Spr	✓✓	✓	✓	✓	✓	✓	✓	✓	
	Amb	<i>Anigozanthos manglesii</i> x 'Bush Dance'	Kangaroo Paw Bush Dance	0.7	0.5	0.5	FS/PS	Win/Spr	✓✓	✓	✓	✓	✓	✓	✓	✓	
	Bju	<i>Baumea juncea</i>	Bare Twig-rush	1	1	0.8	FS	Spr/Sum	✓		✓	✓	✓	✓	✓	✓	
	Bpr	<i>Baumea preissii</i>	Broad Twig Sedge	1 to 2	1 to 2	0.8	FS/PS	Win/Spr/Sum	✓✓✓						✓	✓	
	Bca	<i>Bolboschoenus caldwellii</i>	Marsh Club-rush	1	1	0.8	FS/PS	Win/Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓	✓
	Bco	<i>Burchardia congesta</i>	Milmaids	0.5	0.3	0.3	FS/PS	Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓
	Cap	<i>Carex appressa</i>	Tall Sedge	1	1	0.8	FS/PS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓
	Cte	<i>Carex tereticaulis</i>	Sedge	0.7	1	0.5	FS/PS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓
	Cca	<i>Conostylis candicans</i>	Grey Cottonheads	0.4	0.4	0.3	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓
	Cac	<i>Constylis aculeata</i>	Prickly Conostylis	0.4	0.4	0.3	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓
	Dtr	<i>Dampiera trigona</i>	N/A	0.75	0.4	0.3	FS	Win/Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓
	Dre	<i>Dianella revoluta</i>	Flax Lily	1	1	0.8	FS/PS	Spr	✓✓✓		✓	✓	✓	✓	✓	✓	✓
	Dlr	<i>Dianella revoluta</i> 'Little Rev'	Flax Lily Little Rev	0.4	0.4	0.3	FS/PS/Sh	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓
	Drv	<i>Dianella revoluta</i> 'Revelation'w	Flax Lily Revelation	0.5	0.5	0.5	FS/PS/Sh	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓
	Dst	<i>Dielsia stenostachya</i>	N/A	0.5	0.5	0.5	FS	Sum/Aut	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓
	Hpa	<i>Haemodorum paniculatum</i>	Mardja	1	0.2	0.20	FS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓
	Ice	<i>Isolepis cernua</i>	Nodding Club Rush	0.3	0.3	0.3	FS/PS	Win/Spr/Sum	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Jkr	<i>Juncus kraussii</i>	Sea Rush	1.2	1	0.80	FS	Spr/Sum	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Jpa	<i>Juncus pallidus</i>	Giant Rush	2	1	0.8	FS/PS	Spr	✓✓✓		✓	✓	✓	✓	✓	✓	✓
	Llo	<i>Lepidosperma longitudinale</i>	Pithy Sword Sedge	2	1	0.8	FS/PS	Aut/Win/Spr	✓✓✓		✓	✓	✓	✓	✓	✓	✓
	Ola	<i>Orthrosanthus laxus</i>	Morning Iris	0.5	0.5	0.5	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓
	Tmu	<i>Thysanotus multiflorus</i>	Many Flowered Fringe Lily	0.5	0.4	0.4	FS/PS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓	✓

Sun/Shade Conditions		Waterwise	
FS	Full Sun	✓✓✓	Waterwise
PS	Part Shade	✓✓	Waterwise once established
Sh	Shade	✓	Requires irrigation

Character Zone 3

Plant Pallet - Groundcovers

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application						
										Small R.A.B	Medium R.A.B	Large R.A.B	P.A.W.	Cul-de-sac	Civic Space	Parks
	Groundcovers															
Guildford/ Swan	Cqp	<i>Billardiera fusiformis</i>	Australian Blue Bell	0.3	2	1	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Dli	<i>Dampiera linearis</i> 'Western Blue'/'Blue'	Dampiera	0.3	1	0.3	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Eac	<i>Eremophila glabra</i> 'Amber Carpet'	Tar Bush	0.3	2	1	FS/PS	Aut/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Ebh	<i>Eremophila glabra</i> 'Blue Horizon'	Emu Bush Blue Horizon	0.3	1	0.8	FS/PS	Seasons	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Ekc	<i>Eremophila glabra</i> 'Kalbarri Carpet'	Emu Bush Kalbarri Carpet	0.2	2	1	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Erd	<i>Eremophila glabra</i> 'Red Desert'	Emu Bush Red Desert	0.3	1	0.8	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Egc	<i>Eremophila glabra compactum</i>	Emu Bush	0.5	1.5	1.2	FS	Aut/Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Egp	<i>Eremophila glabra prostrata</i>	Prostrate Emu Bush	0.3	1	0.8	FS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hco	<i>Hardenbergia comptoniana</i>	Native Wisteria	0.3	2	1	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hpu	<i>Hemiandra pungens</i>	Snake Bush	0.3	1.5	1	FS/PS	Spr/Sum/Aut	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hpa	<i>Hemiandra pungens alba</i>	Snake Bush White	0.3	1.5	1	FS/PS	Sum/Aut	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hpp	<i>Hemiandra pungens purpurea</i>	Snake Bush Purple	0.3	1.5	1	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Lan	<i>Lobelia anceps</i>	Angled Lobelia	0.3	0.3	0.3	FS/PS	Aut	✓	✓	✓	✓	✓	✓	✓	✓

Sun/Shade Conditions		Waterwise	
FS	Full Sun	✓✓✓	Waterwise
PS	Part Shade	✓✓	Waterwise once established
Sh	Shade	✓	Requires irrigation

Character Zone 3

Shrubs



Agonis flexuosa nana



Beaufortia squarrosa



Calytrix angulata



Hakea trifurcata



Pimelia rosea



Atriplex cinerea



Calothamnus hirsutus



Gastrolobium celsianum




Melaleuca lateritea



Viminaria juncea

Strappy Plants

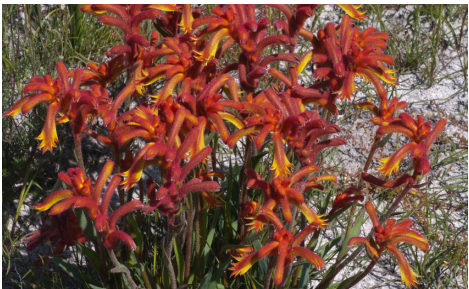

Anigozanthos humilis



Carex tereticaulis



Conostylis candicans



Dianella revoluta 'Revelation'




Orthrosanthus laxus



Carex apressa



Conostylis aculeata

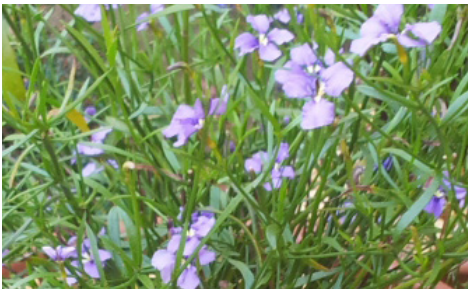

Dampiera trigona



Dielsia stenostachya



Thysanotus multiflorus

Groundcovers



Billardiera fusiformis



Eremophila glabra 'Blue Horizon'



Eremophila glabra 'Red Desert'



Eremophila glabra prostrata



Hemiandra pungens purpurea



Eremophila glabra 'Amber Carpet'



Eremophila glabra 'Kalbarri Carpet'



Eremophila glabra compactum



Hardenbergia comptoniana




Lobelia anceps

Character Zone 3

Small Roundabout

Example Application - Plan

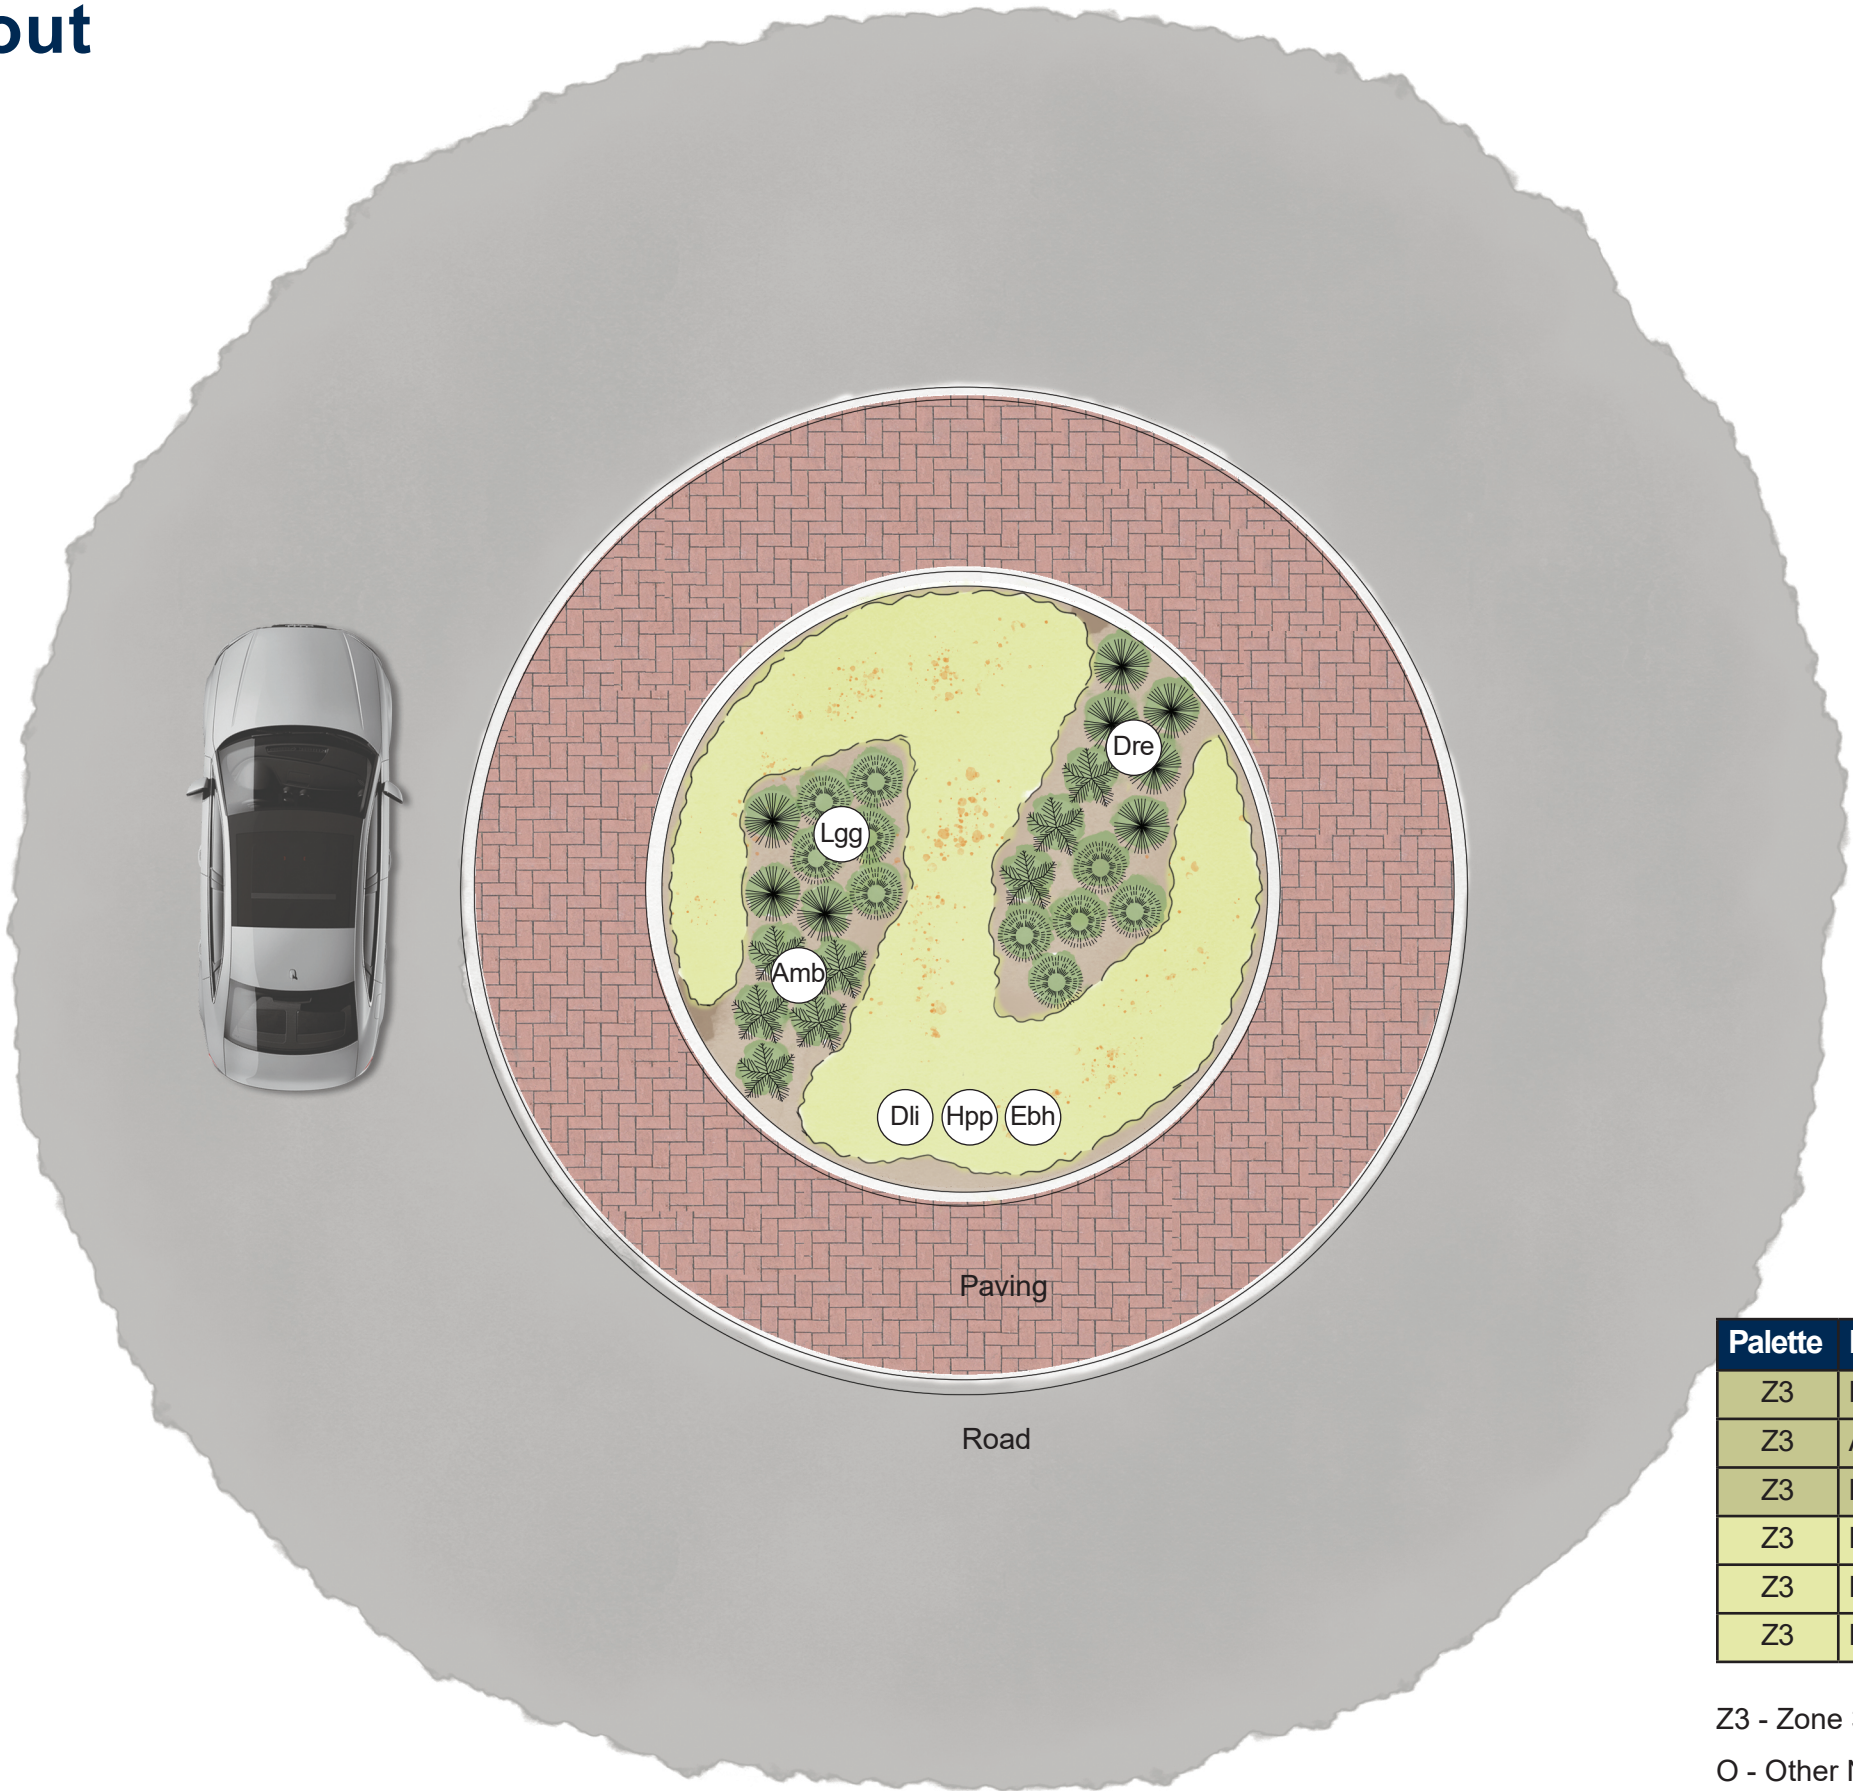

Palette	Key	Genus/Species
Z3	Dre	<i>Dianella revoluta</i>
Z3	Amb	<i>Anigozanthos manglesii</i> x 'Bush Dance'
Z3	Lgg	<i>Lepidosperma gladiatum</i> "Gladiator"
Z3	Dli	<i>Dampiera linearis</i> "Blue"
Z3	Hpp	<i>Hemiandra pungens purpurea</i>
Z3	Ebh	<i>Eremophila glabra</i> "Blue Horizon"


Z3 - Zone 3 Plant Palette

O - Other Native Plants - refer Supplementary Palette

Character Zone 3

Medium Roundabout

Example Application - Plan

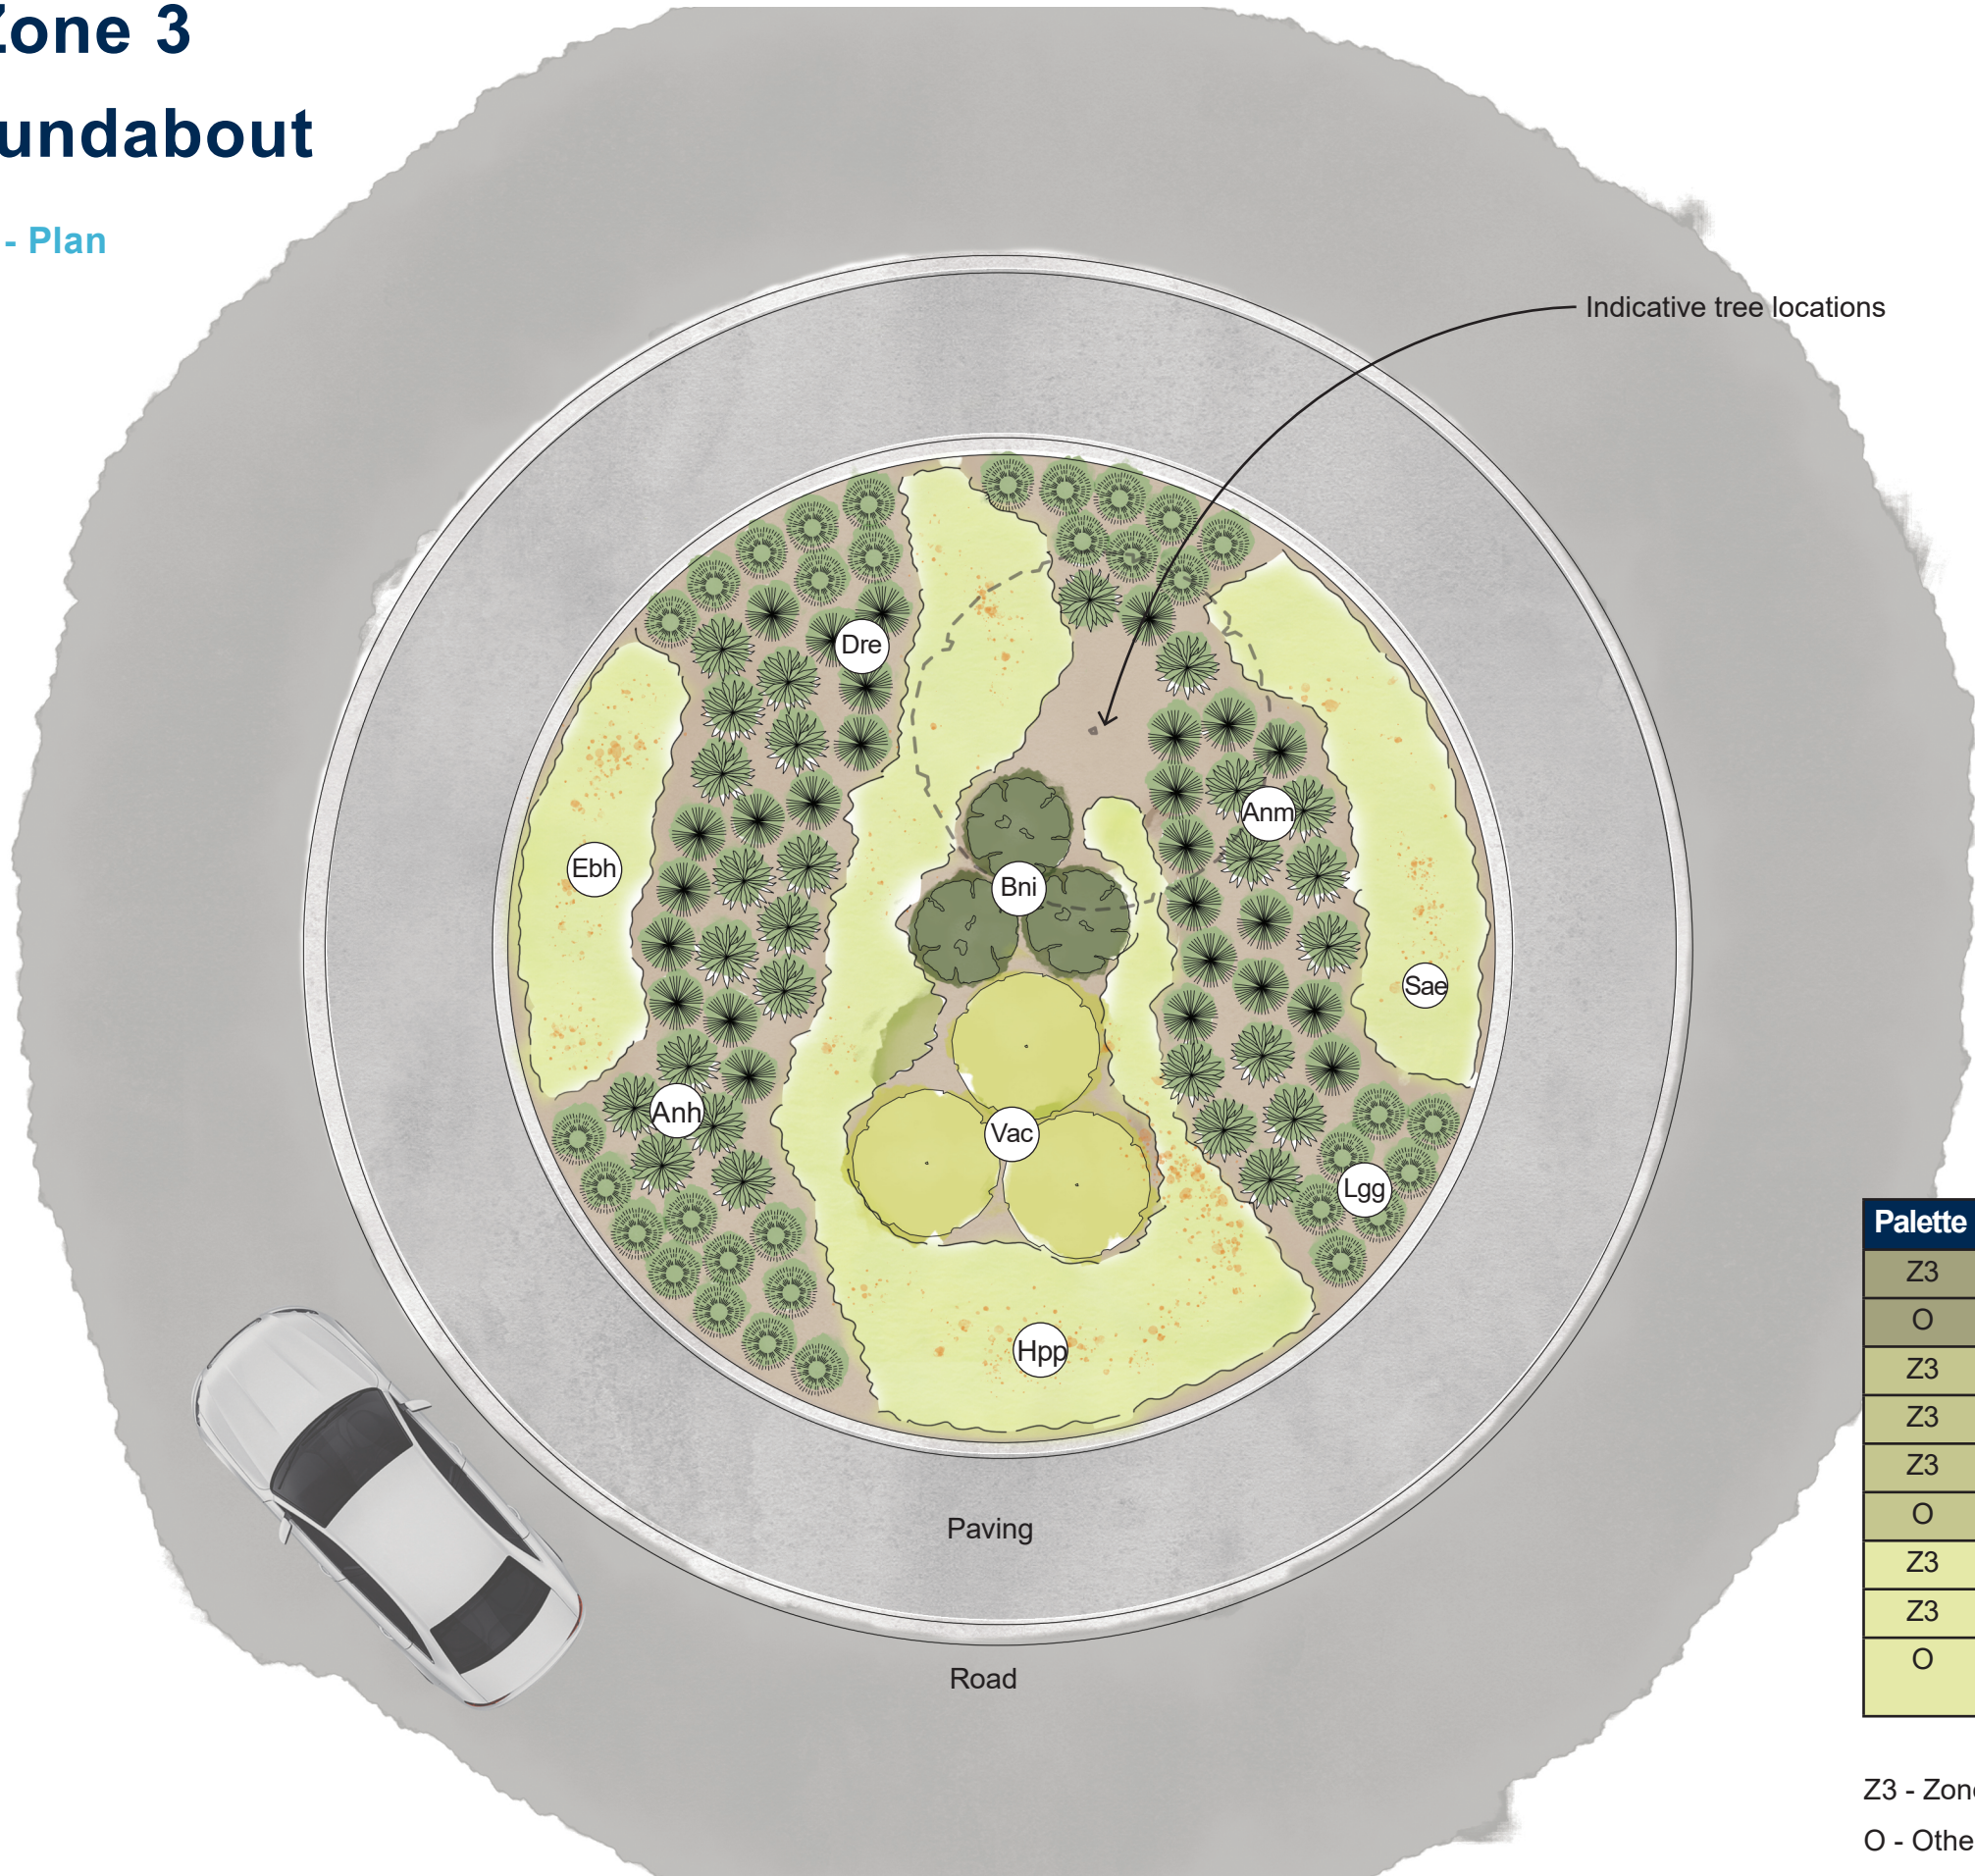

Palette	Key	Genus/Species
Z3	Vac	<i>Verticordia acerosa</i>
O	Bni	<i>Banksia nivea</i>
Z3	Ahu	<i>Anigozanthos humilis</i>
Z3	Anm	<i>Anigozanthos manglesii</i>
Z3	Dre	<i>Dianella revoluta</i>
O	Lgg	<i>Lepidosperma gladiatum</i> "Gladiator"
Z3	Ebh	<i>Eremophila glabra</i> 'Blue Horizon'
Z3	Hpp	<i>Hemiandra pungens purpurea</i>
O	Sae	<i>Scaevola aemula</i> "Kings Park Midnight"

Z3 - Zone 3 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 3

Medium Roundabout


Example Application - Perspective



Character Zone 3

Cul-de-sacs

Example Application - Plan

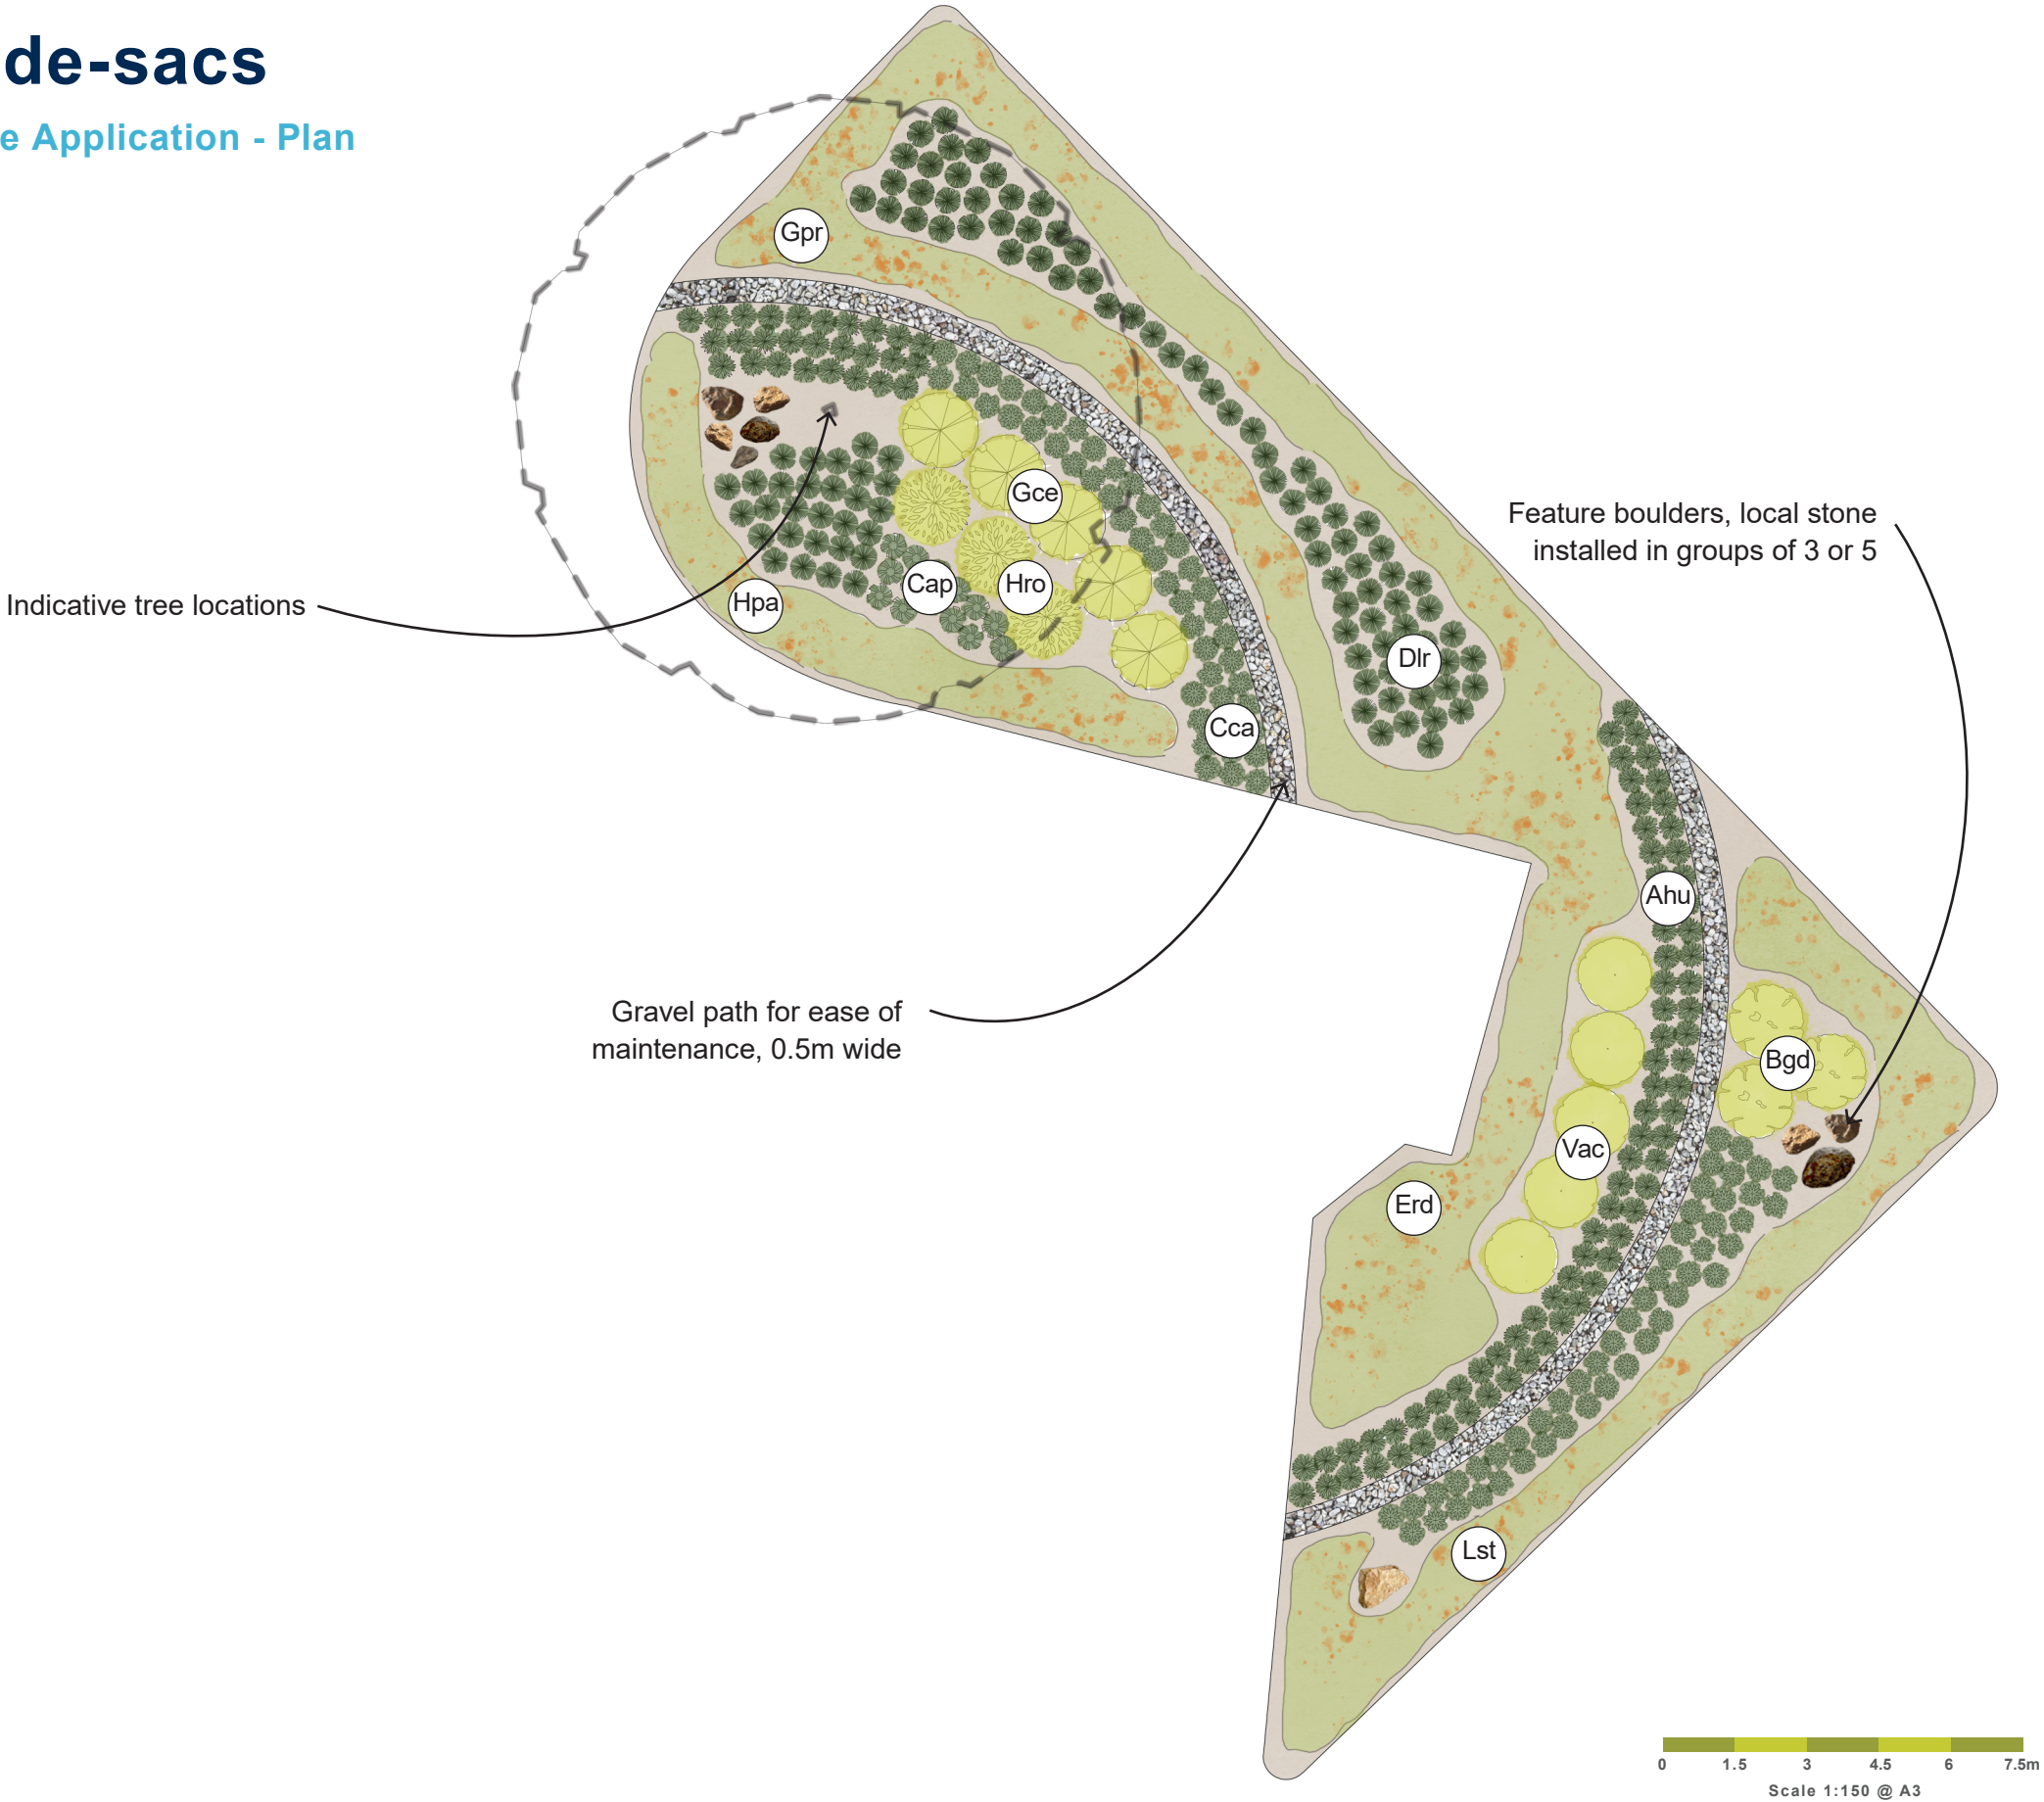

Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z3	Bgd	<i>Banksia grandis</i> dwarf
Z3	Gce	<i>Gastrolobium celsianum</i>
Z3	Hro	<i>Hypocalymma robustum</i>
Z3	Vac	<i>Verticordia acerosa</i>
Z3	Ahu	<i>Anigozanthos humilis</i>
Z3	Cap	<i>Carex appressa</i>
Z3	Cca	<i>Conostylis candicans</i>
Z3	Dlr	<i>Dianella revoluta</i> 'Little Rev'
Z3	Erd	<i>Eremophila glabra</i> 'Red Desert'
Z3	Hpa	<i>Hemiandra pungens</i> alba
O	Gpr	<i>Grevillea preissii</i> 'Seaspray'
O	Lst	<i>Leptospermum laevigatum</i> 'Shore Tuff'

Z3 - Zone 3 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 3

Cul-de-sacs

Example Application - Plan



Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z3	Asc	<i>Astartea scoparia</i>
Z3	Bgd	<i>Banksia grandis</i> dwarf
Z3	Pro	<i>Pimelia rosea</i>
Z3	Vpl	<i>Verticordia plumosa</i>
Z3	Cac	<i>Constylis aculeata</i>
Z3	Drv	<i>Dianella revoluta</i> 'Revelation'
Z3	Ola	<i>Orthrosanthus laxus</i>
Z3	Tmu	<i>Thysanotus multiflorus</i>
Z3	Dli	<i>Dampiera linearis</i> 'Western Blue'/'Blue'
Z3	Ebh	<i>Eremophila glabra</i> 'Blue Horizon'
Z3	Hpp	<i>Hemiandra pungens purpurea</i>
O	Cci	<i>Casuarina glauca</i> 'Cousin It'

Z3 - Zone 3 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 3

Cul-de-sacs


Example Application - Perspective



Character Zone 3

Civic Space

Example Application - Plan

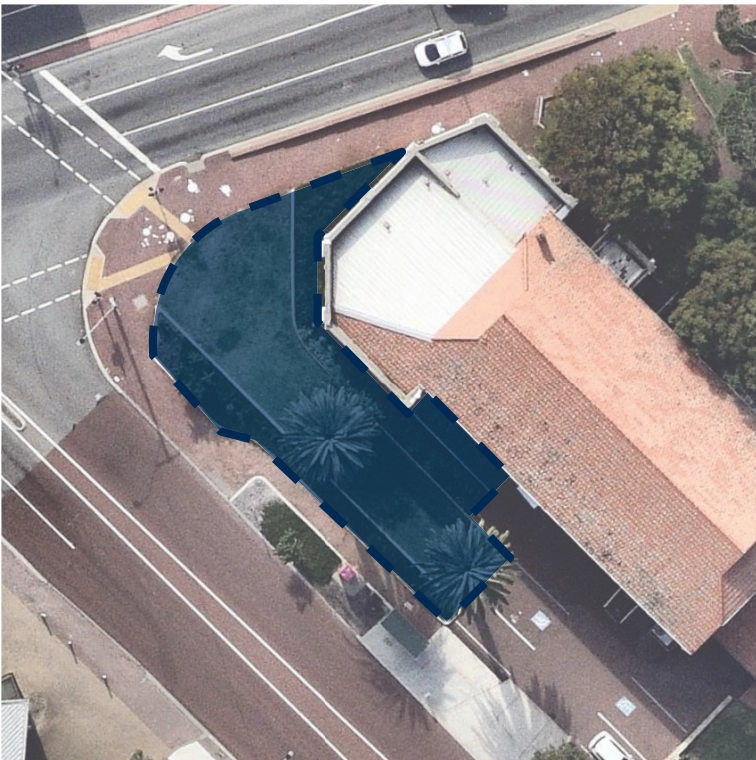

Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z3	Bgd	<i>Banksia grandis</i> dwarf
Z3	Can	<i>Calytrix angulata</i>
Z3	Hli	<i>Hakea lissocarpa</i>
Z3	Hro	<i>Hypocalymma robustum</i>
Z3	Drv	<i>Dianella revoluta</i> 'Revelation'
Z3	Ice	<i>Isolepis cernua</i>
Z3	Tmu	<i>Thysanotus multiflorus</i>
O	Aer	<i>Anigozanthos</i> x 'Everlasting Red'
Z3	Egc	<i>Eremophila glabra</i> compactum
Z3	Hpp	<i>Hemiandra pungens</i> purpurea
O	Acu	<i>Adenanthos cuneatus</i>
O	Cci	<i>Casuarina glauca</i> 'Cousin It'

Z3 - Zone 3 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 3

Civic Space



Example Application - Perspective



Character Zone 3

Civic Space

Example Application - Plan

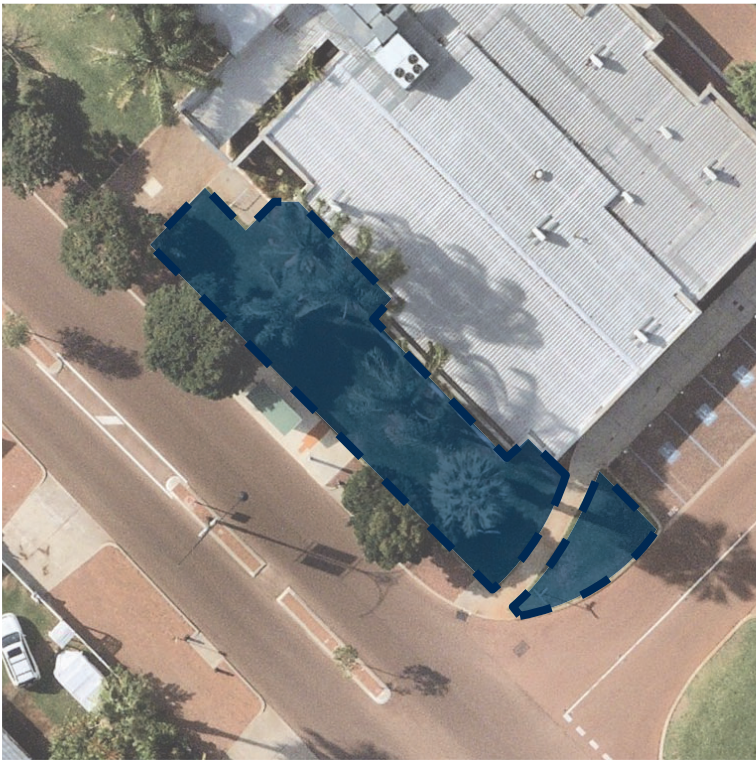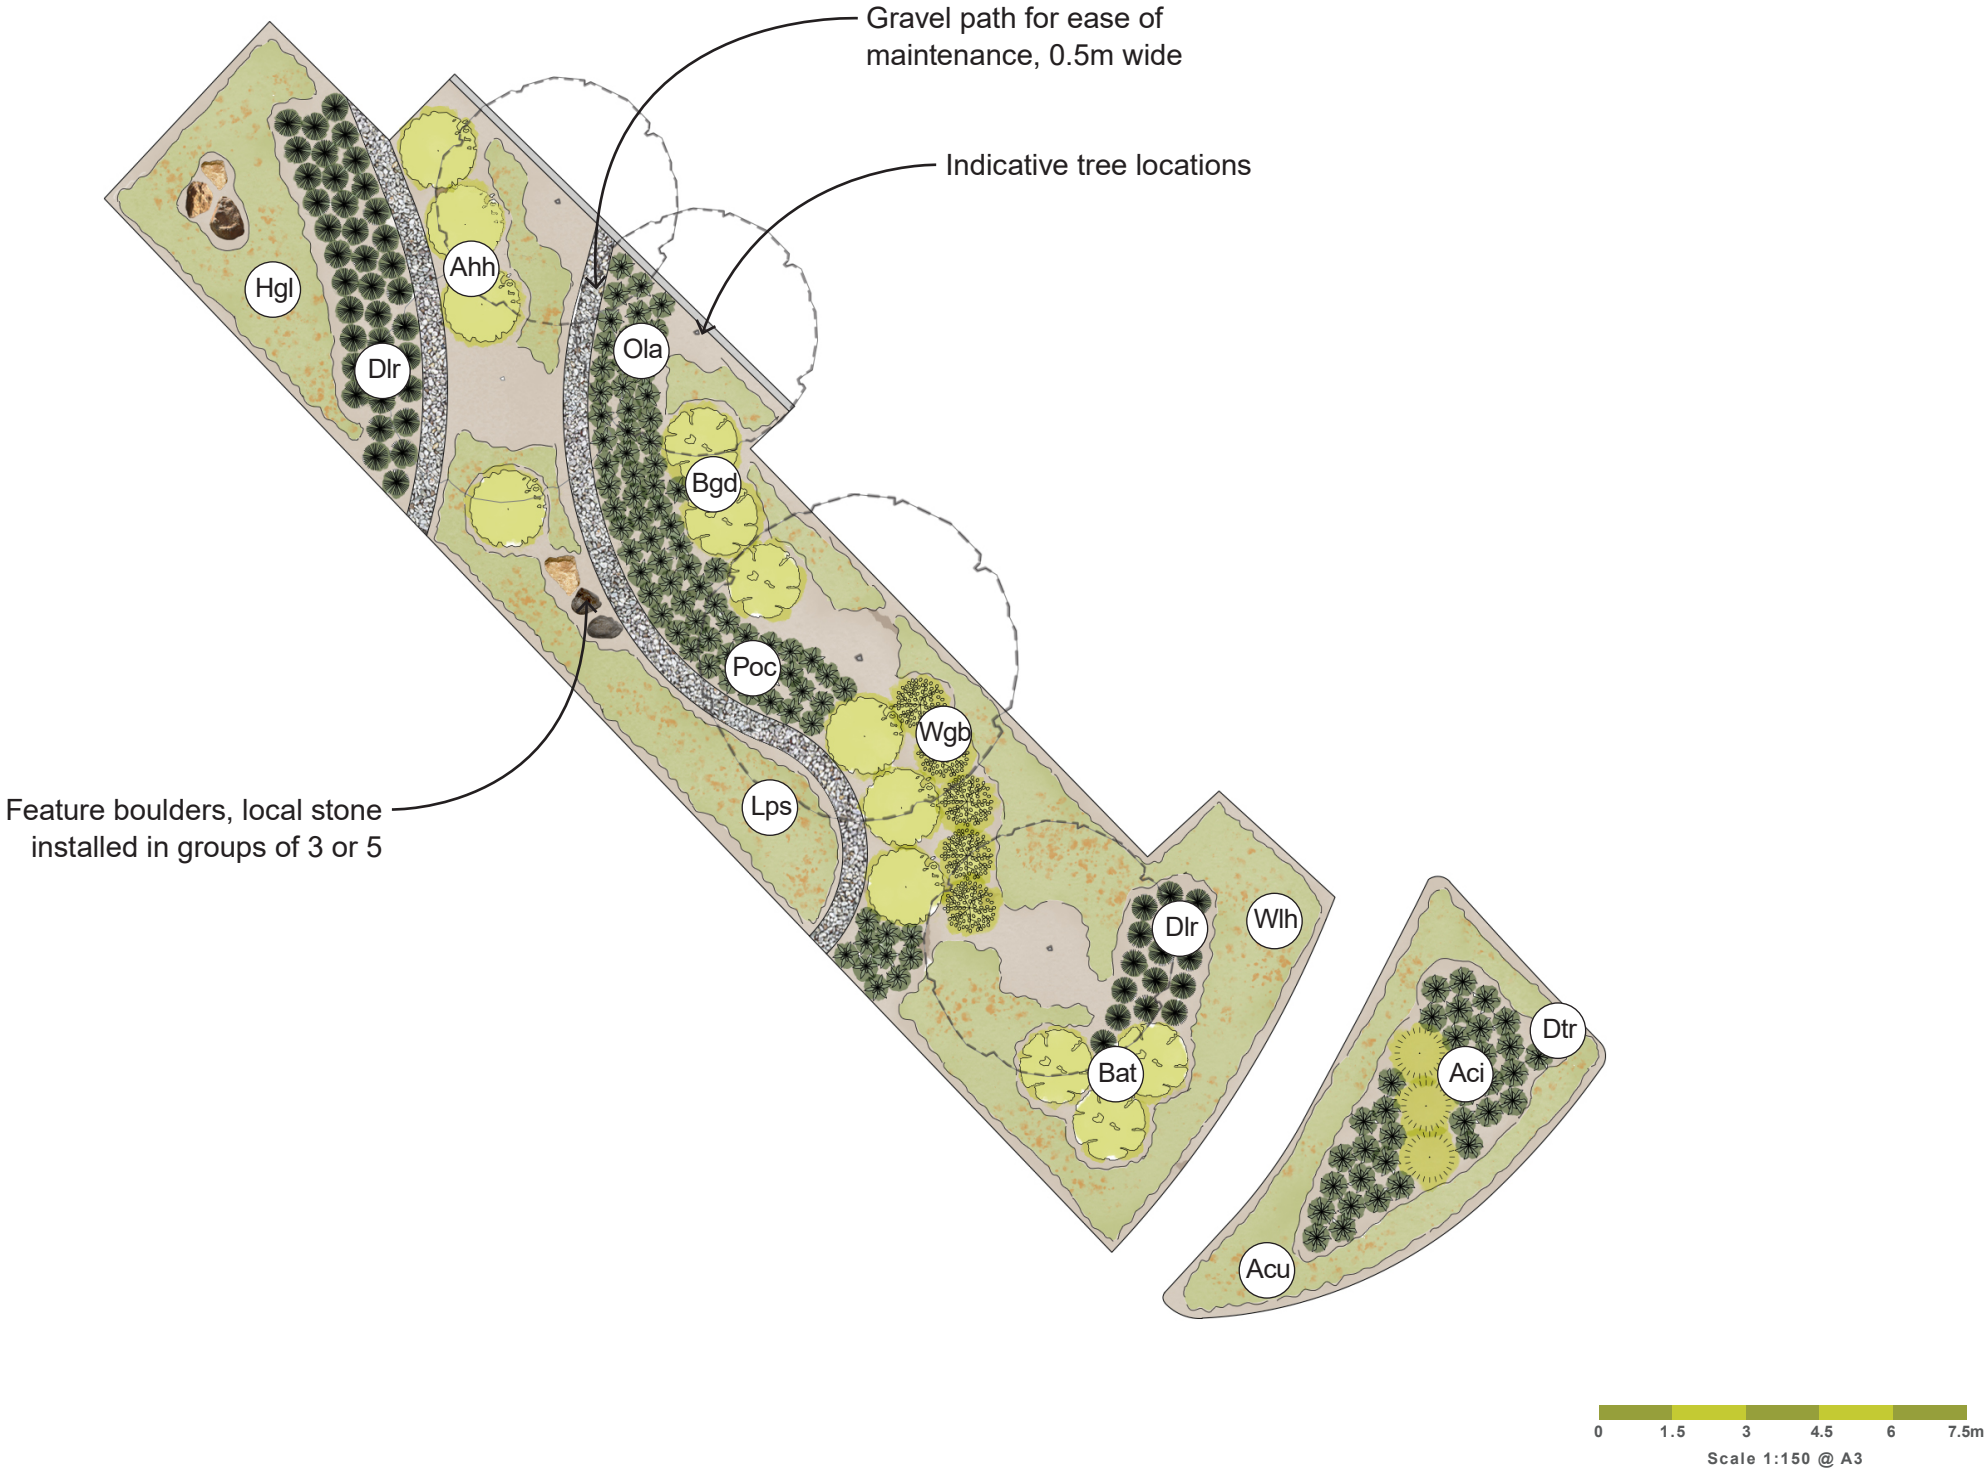

Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z3	Aci	<i>Atriplex cinerea</i>
Z3	Bgd	<i>Banksia grandis dwarf</i>
O	Ahh	<i>Acacia howittii</i> 'Honey Bun'
O	Wgb	<i>Westringia hybrid</i> 'Grey Box'
Z3	Ola	<i>Orthrosanthus laxus</i>
Z3	Poc	<i>Patersonia occidentalis</i>
Z3	Dtr	<i>Dampiera trigona</i>
Z3	Dlr	<i>Dianella revoluta</i> 'Little Rev'
O	Acu	<i>Adenanthos cuneatus</i>
O	Hgl	<i>Hibbertia grossularifolia</i>
O	Lps	<i>Leptospermum x</i> 'Pink Cascade'
O	Wlh	<i>Westringia fruticosa</i> 'Low Horizon'

Z3 - Zone 3 Plant Palette
O - Other Native Plants - refer Supplementary Palette

Character Zone 3

Civic Space

Example Application - Perspective



Character Zone 3

Parks & Gardens

Example Application - Plan



Context Plan (1:500 scale)

Palette	Key	Genus/Species
Z3	Bgd	<i>Banksia grandis</i> dwarf
Z3	Chi	<i>Calothamnus hirsutus</i>
Z3	Han	<i>Hypocalymma angustifolium</i>
Z3	Jst	<i>Jacksonia sternbergiana</i>
Z3	Cte	<i>Carex tereticaulis</i>
Z3	Cca	<i>Conostylis candicans</i>
Z3	Llo	<i>Lepidosperma longitudinale</i>
O	Aem	<i>Anigozanthos</i> xKP03 'Everlasting Mega Gold'
Z3	Egd	<i>Eremophila glabra</i> 'Dawes'
O	Alp	<i>Acacia lasiocarpa</i> prostrate
O	Bni	<i>Banksia nivea</i>
O	Ggj	<i>Grevillea obtusifolia</i> 'Gin Gin Jewel'

Z3 - Zone 3 Plant Palette

O - Other Native Plants - refer Supplementary Palette

Character Zone 3

Parks & Gardens

Example Application - Perspective



Other Native Plants - Supplementary Palette

Plant Pallet - Shrubs

Choosing locally occurring native species provides the greatest habitat value, but there are plenty of waterwise options from WA and from other parts of the country that are well suited to local growing conditions.

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application						
										Small R.A.B	Medium R.A.B	Large R.A.B	Cul-de-sac	P.A.W.	Civic Space	Parks
	Shrubs															
Other Native Plants	Afe	Acacia cognata 'Fettuccini'	Bower Wattle	0.75	1.2	1.2	FS/PS	Spr	✓✓		✓	✓	✓	✓	✓	✓
	Ahb	Acacia howittii 'Honey Bun'	Acacia Honey Bun	1.5	1.5	1.2	FS/PS	Spr/Sum	✓✓✓				✓	✓	✓	✓
	Ala	Acacia lasiocarpa	Coastal Wattle	0.5	1	0.8	FS/PS	Spr/Win	✓✓✓		✓	✓	✓	✓	✓	✓
	Ase	Adenanthos sericeus 'Pencil Perfect'	Woolly Bush Pencil Perfect	3	2	1.5	FS/PS	Spr/Summer	✓✓✓				✓	✓	✓	✓
	Ali	Adenanthos x 'Lighthouse'	Woolly Bush Lighthouse	1	1	1	FS/PS	Spr	✓✓		✓	✓	✓	✓	✓	✓
	Bas	Banksia ashbyi dwarf	Banksia Asbhyi	1.5	2	1.5	FS	Aut/Win/Spr	✓✓				✓	✓	✓	✓
	Bni	Banksia nivea	Couch Honeypot	0.5	1	0.8	FS/PS	Aut/Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Bpr	Banksia prionotes dwarf	Banksia Prionotes	1.5	1.5	1.2	FS/PS	Aut/Spr/Sum	✓✓✓				✓	✓	✓	✓
	Cwa	Callistemon citrinus 'White Anzac'	Bottlebrush White Anzac	1	3	1.5	FS	Spr	✓✓✓				✓	✓	✓	✓
	Caa	Callistemon hybrid 'All Aglow'	Bottlebrush All Aglow	2.5	1.5	1.5	FS/PS	Spr	✓✓✓						✓	✓
	Chp	Callistemon pallidu x citrinus 'Hot Pink'	Hot Pink Bottlebrush	1.4	1	1	FS	Spr/Aut	✓✓✓		✓	✓	✓	✓	✓	✓
	Cgj	Callistemon viminalis 'Green John'	Bottlebrush	0.6	0.6	0.5	FS/PS	Spr	✓✓✓		✓	✓	✓	✓	✓	✓
	Cjs	Chamelaucium uncinatum 'Jackie Sue'	Geraldton Wax Jackie Sue	2	2	1.5	FS/PS	Spr/Sum	✓✓						✓	✓
	Cco	Chorizema cordatum	Heart Leaf Flame Pea	1.5	1.5	1	FS/PS	Spr/Sum/Win	✓✓				✓	✓	✓	✓
	Cst	Conospermum stoechadis	Common Smokebush	1 - 1.5	1.5	1	FS	Win/Spr/Sum	✓✓✓				✓	✓	✓	✓
	Egd	Eremophila glabra 'Dawes'	Smooth/Rottnest Emu Bush	0.8	1	1	FS/PS	Spr/Sum/Aut	✓✓✓		✓	✓	✓	✓	✓	✓
	Esm	Eremophila nivea 'Spring Mist'	Silky Eremophila	2	2	1.2	FS/PS	Win	✓✓✓				✓	✓	✓	✓
	Ekr	Eucalyptus kruseana	Bookleaf Mallee	2	1.5	1.5	FS	Win	✓✓✓				✓	✓	✓	✓
	Grg	Grevillea banksii x bipinnatifida 'Robyn Gordon'	Grevillea Robyn Gordon	2	1.5	1.2	FS/PS	Spr/Sum	✓✓✓				✓	✓	✓	✓
	Gkm	Grevillea hybrid 'GR52' Kimberley Moon	Grevillea Kimberley Moon	2.5	2.5	1.5	FS	All year	✓✓✓						✓	✓
	Gsu	Grevillea hybrid 'Superb'	Grevillea Superb	3	2	1.5	FS	All year	✓✓✓				✓	✓	✓	✓
	Gob	Grevillea obtusifolia	Spider Flower	1.5	1.5	1.2	FS	Aut/Win/Spr	✓✓✓				✓	✓	✓	✓
	Gcv	Grevillea ros'H16' Crimson Villea	Grevillea Superb	0.8	0.8	0.5	FS	Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Hra	Hibbertia racemosa	Stalked Guinea Flower	0.5	0.3	0.3	FS/PS	Spr/Sum/Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Lfo	Leptospermum laevigatum 'Foreshore'	Dwarf Tea Tree	0.5	1	0.8	FS/PS	Nil	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Lsc	Leptospermum scoparia nanum rubrum	Dwarf Tea Tree	1	1	0.8	FS/PS	Spr/Win	✓✓✓		✓	✓	✓	✓	✓	✓
	Lbr	Leucophyta brownii	Cushion Bush	1	1	0.8	FS/PS	Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Lsn	Leucophyta brownii 'Silver Nugget'	Silver Nugget Cushion Bush	0.5	0.5	0.5	FS/PS	Nil	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Sae	Scaevola aemula	Fairy Fan-flower	0.5	0.8	0.5	FS	Aut/Sum/Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Ssp	Scaevola hybrid 'Sparkle'	Scaevola	0.5	0.7	0.5	FS	Spr/Sum/Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Wab	Westringia hybrid 'Aussie Box'	Native Rosemary Aussie Box	0.9	0.9	0.8	FS/PS	Aut/Spr/Sum	✓✓✓		✓	✓	✓	✓	✓	✓
	Wgb	Westringia hybrid 'Grey Box'	Native Rosemary Grey Box	0.45	0.45	0.5	FS	Aut/Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓

Other Native Plants - Supplementary Palette

Plant Pallet - Strappy Plants

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application						
										Small R.A.B	Medium R.A.B	Large R.A.B	Cul-de-sac	P.A.W.	Civic Space	Parks
	Strappy Plants															
Other Native Plants	Abf	<i>Anigozanthos hybrid 'Bush Fury'</i>	Kangaroo Paw Bush Fury	1	1.5	1.2	FS	All year	✓✓	✓	✓	✓	✓	✓	✓	✓
	Abr	<i>Anigozanthos hybrid 'Bush Rampage'</i>	Kangaroo Paw Bush Rampage	0.6	1	0.8	FS	Aut/Win/Spr	✓✓	✓	✓	✓	✓	✓	✓	✓
	Aer	<i>Anigozanthos hybrid 'Everlasting Red'</i>	Kangaroo Paw Everlasting Red	0.45	0.35	0.35	FS	Aut/Win/Spr	✓✓	✓	✓	✓	✓	✓	✓	✓
	Aeg	<i>Anigozanthos hybrid 'KP02' Everlasting Gold</i>	Kangaroo Paw Everlasting Gold	0.55	0.35	0.35	FS	Aut/Win/Spr	✓✓	✓	✓	✓	✓	✓	✓	✓
	Aem	<i>Anigozanthos hybrid 'KP03' Everlasting Mega Gold</i>	Kangaroo Paw Everlasting Mega Gold	0.45	0.35	0.35	FS	Aut/Win/Spr	✓✓	✓	✓	✓	✓	✓	✓	✓
	Dva	<i>Dianella hybrid Variegated</i>	Variegated Dianella	0.5	0.5	0.5	FS/PS	Aut/Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Lgl	<i>Lepidosperma gladiatum' Gladiator'</i>	Coastal Sword Sedge	0.6	0.6	0.6	FS/PS	Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓

Sun/Shade Conditions		Waterwise	
FS	Full Sun	✓✓✓	Waterwise
PS	Part Shade	✓✓	Waterwise once established
Sh	Shade	✓	Requires irrigation

Other Native Plants - Supplementary Palette

Plant Pallet - Groundcovers

	Key	Genus/Species	Common Name	Mature Height (m)	Mature Width (m)	Advised Spacing (per m²)	Sun/Shade Conditions	Flower Season	Waterwise	Suitable Application						
										Small R.A.B	Medium R.A.B	Large R.A.B	Cul-de-sac	P.A.W.	Civic Space	Parks
	Groundcovers															
Other Native Plants	Alp	<i>Acacia lasiocarpa prostrate</i>	Glow Wattle	0.25	1	1	FS/PS	Win/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Acu	<i>Adenanthos cuneatus</i>	Coastal Jug Flower	0.3	1.5	0.8	FS/PS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Bbl	<i>Banksia blechnifolia</i>	Banksia Blechnifolia	0.2	2	1	FS/PS	Spr/Sum	✓✓	✓	✓	✓	✓	✓	✓	✓
	Bpe	<i>Banksia petiolaris</i>	Banksia Petiolaris	0.3	2	1.5	FS/PS	Spr/Sum/Win	✓✓	✓	✓	✓	✓	✓	✓	✓
	Cte	<i>Calytrix tetragona postrate</i>	Fringe Myrtle	0.5	1.5	1.2	FS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Cci	<i>Casuarina glauca 'Cousin It'</i>	Casuarina groundcover	0.2	1	1	FS	Nil	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Dci	<i>Darwinia citriadora 'Seaspray'</i>	Prostrate Lemon Scented Darwinia	0.6	0.9	0.8	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Ebh	<i>Eremophila glabra 'Blue Horizon'</i>	Emu Bush Blue Horizon	0.3	1	1	FS/PS	Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Ekc	<i>Eremophila glabra 'Kalbarri Carpet'</i>	Emu Bush Kalbarri Carpet	0.2	2	1	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Erd	<i>Eremophila glabra 'Red Desert'</i>	Emu Bush Red Desert	0.3	1	0.8	FS/PS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Egc	<i>Eremophila glabra compactum</i>	Emu Bush	0.5	1.5	1.2	FS	Aut/Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Egp	<i>Eremophila glabra prostrata</i>	Prostrate Emu Bush	0.3	1	0.8	FS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Ggc	<i>Grevillea crithmifolia 'Green Carpet'</i>	Grevillea Green Carpet	0.3	2	1.5	FS	Spr/Win	✓✓✓	v	✓	✓	✓	✓	✓	✓
	Gcp	<i>Grevillea crithmifolia prostrate</i>	Grevillea Crithmifolia	0.3	2	1.5	FS	Spr/Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Gco	<i>Grevillea hybrid 'Coverall'</i>	Grevillea Coverall	0.8	4	1.5	FS	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Grc	<i>Grevillea nivea x variifolia 'Red Coral'</i>	Kings Park Grevillea Red Coral	0.3	2	1.5	FS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Ggg	<i>Grevillea obtusifolia 'Gin Gin Gem'</i>	Grevillea Gin Gin Gem	0.3	2	1.5	FS	All year	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Ggj	<i>Grevillea obtusifolia 'Gin Gin Jewel'</i>	Grevillea Gin Gin Jewel	0.5	4	1.5	FS	Spr/Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Gpr	<i>Grevillea preissii 'Seaspray'</i>	Grevillea Seaspray	0.2	1	0.8	FS	Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Gmm	<i>Grevillea thelemanniana 'Mini Marvel'</i>	Grevillea Mini Marvel	0.3	1	0.8	FS/PS	All year	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hme	<i>Hardenbergia violacea HB1'Meema'</i>	Native Wisteria	0.5	2	1	FS/PS	Spr/Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hwo	<i>Hardenbergia violacea 'White Out'</i>	False Sarsparilla	0.5	2	1	FS	Spr/Win	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hgl	<i>Hibbertia grossularifolia</i>	Strawberry Leaf Buttercup	0.1	1	0.8	PS/Sh	Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Hgl	<i>Hibbertia scandens</i>	Snake Vine	0.3	2	1	FS/PS	All year	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Lst	<i>Leptospermum laevigatum 'Shore Tuff'</i>	Prostrate Tea Tree (white)	0.5	1.2	1	FS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Lps	<i>Leptospermum x 'Pink Cascade'</i>	Prostrate Tea Tree (pink)	0.5	2	1.5	FS	Aut/Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Skp	<i>Scaevola aemula 'Kings Park Midnight'</i>	Fan Flower	0.25	1	0.8	FS/PS	Aut/Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Scr	<i>Scaevola crassifolia prostrate</i>	Cushion Fan Flower	0.5	2	1.5	FS/PS	Spr	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Spp	<i>Scaevola striata 'Pink Perfections'</i>	Fan Flower	0.5	1.5	1	FS	Aut/Spr/Sum	✓✓✓	✓	✓	✓	✓	✓	✓	✓
	Wlh	<i>Westringia fruticosa 'Low Horizon'</i>	Coastal Rosemary	0.2	1	1	FS	All year	✓✓✓	✓	✓	✓	✓	✓	✓	✓

Sun/Shade Conditions		Waterwise	
FS	Full Sun	✓✓✓	Waterwise
PS	Part Shade	✓✓	Waterwise once established
Sh	Shade	✓	Requires irrigation

Other Native Plants - Supplementary Palette


Shrubs




Acacia cognata 'Fettuccinii'




Banksia nivea

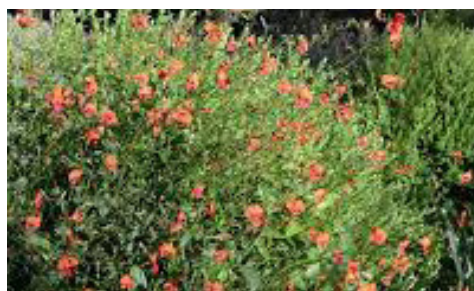

Chorizema cordatum

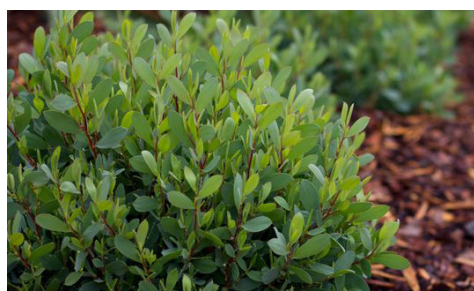


Leptospermum laevigatum 'Foreshore'

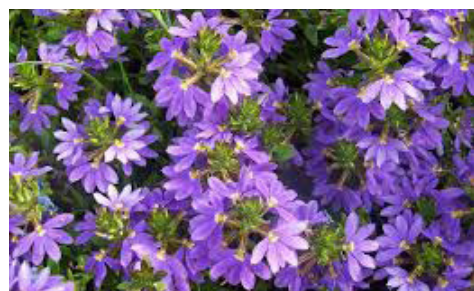

Scaevola aemula



Banksia ashbyi dwarf

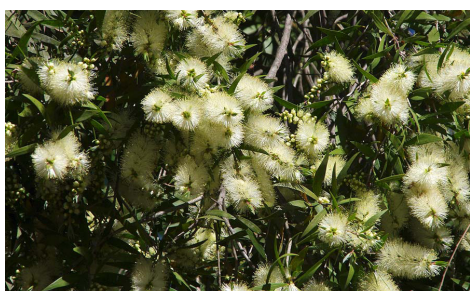

Calistemon citrinus 'White Anzac'



Grevillea 'Crimson Villea'




Leucophyta brownii



Westringia 'Grey Box'

Strappy Plants

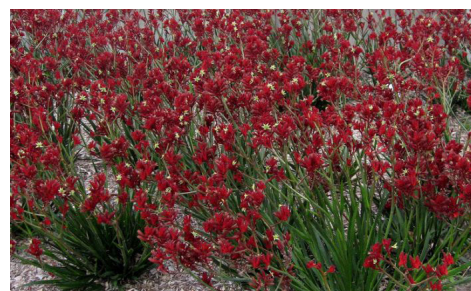

Anigozanthos 'Bush Fury'




Anigozanthos 'Bush Rampage'



Anigozanthos 'Everlasting Gold'




Dianella hybrid Variegated

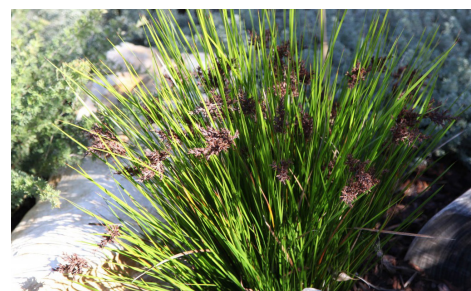


Lepidospermua gladiatum
'Gladiator'

Groundcovers

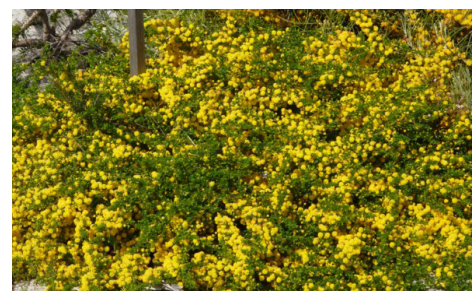

Acacia lasiocarpa prostrate

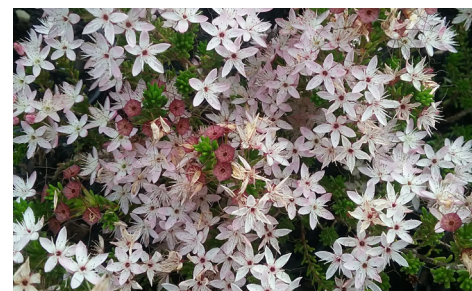


Calytrix tetragona prostrate




Grevillea hybrid 'Coverall'



Hibbertia grossularifolia

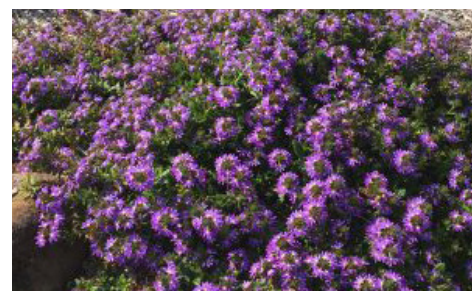

Scaevola aemula 'Kings Park Midnight'

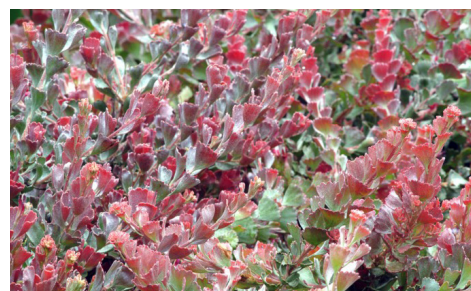


Adenanthos cuneatus



Casuarina glauca 'Cousin it'



Grevillea hybrid 'Red Coral'

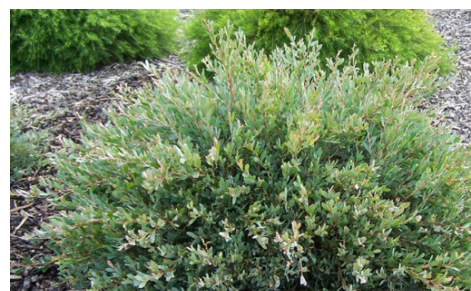

Leptospermum laevigatum 'Shore Tuff'



Scaevola striata 'Pink Perfections'



Banksia blechnifolia



Darwinia citriadora 'Seaspray'



Grevillea obtusifolia 'Gin Gin Gem'



Leptospermum x 'Pink Cascade'




Westringia fruticosa 'Low Horizon'

Photo References

Plant Species	Page No.	Photo Credit	URL
<i>Acacia cognata</i> 'Fettuccinii'	64		https://www.thetutuguru.com.au/shop/acacia-fettucini/
<i>Acacia lasiocarpa</i> prostrate	64		https://www.lulfitz.com.au/acacia-lasiocarpa
<i>Acacia saligna</i> prostrate	9,27		https://peppyplants.com.au/trees/trees-yellow-flowers/
<i>Adenanthos cuneatus</i>	64		https://www.lulfitz.com.au/adenanthos-cuneatus
<i>Agonis flexuosa</i> nana	47		https://www.australianplants.com/plants.aspx?id=1158
<i>Anigozanthos</i> 'Bush Fury'	64		https://www.flowerpower.com.au/kangaroo-paw-bush-fury-1365080200
<i>Anigozanthos</i> 'Bush Rampage'	64		https://www.anigozanthosproject.com/en/anigozanthos-rampage/
<i>Anigozanthos</i> 'Everlasting Gold'	64	Tuffy Plants	https://www.plantmaster.com/gardens/eplant.php?plantnum=2627#images
<i>Anigozanthos humilis</i>	9, 47	Brian Walters	http://anpsa.org.au/a-hum.html
<i>Anigozanthos manglesii</i>	9		https://www.lulfitz.com.au/anigozanthos-manglesii
<i>Anigozanthos manglesii</i> 'Bush Dance'	9		https://www.gardeningwithangus.com.au/anigozanthos-bush-dance-kangaroo-paw/
<i>Aotus gracillima</i>	9		http://www.australiasomuchtosee.com/wildflowersa4.htm
<i>Aotus procumbens</i>	27	Garry Sankowsky	http://www.rainforestmagic.com.au/wafisgallery.html
<i>Astartea scoparia</i>	27		https://www.southernflora.com.au/product/astartea-scoparia-common-astartea/
<i>Atriplex cinerea</i>	47		http://www.plantthis.com.au/plant-information.asp?gardener=9460&tabview=photos&plantSpot=
<i>Banksia ashbyi</i> dwarf	64		https://www.lulfitz.com.au/banksia-ashbyi-dwarf
<i>Banksia attenuata</i>	5	John	https://honkeynuts.com.au/candle-banksia-banksia-attenuata/
<i>Banksia blechnifolia</i>	64		http://www.crescenthillnursery.com/plants/B/Banksia-blechnifolia.htm
<i>Banksia dallanney</i>	9		https://www.cotteslocoastcare.org/banksia-dallanney/
<i>Banksia grandis</i> (Bull Banksia)	43		https://www.gardeningwithangus.com.au/banksia-grandis-bull-banksia/
<i>Banksia menziesii</i>	23	Peter Symes	https://twitter.com/peter_e_symes/status/1000143573130526721
<i>Banksia nivea</i>	64		https://www.lulfitz.com.au/banksia-nivea-syn-dryandra-nivea
<i>Beaufortia elegans</i>	9		https://www.lulfitz.com.au/beaufortia-elegans
<i>Beaufortia squarrosa</i>	47	Anastasia Yakovleva	https://www.alamy.com/stock-photo/western-australia-flower.html
<i>Billardiera fusiformis</i>	47	Sheldon Navie	https://keyserver.lucidcentral.org/weeds/data/media/Html/billardiera_fusiformis.htm
<i>Bosseaea eriocarpai</i>	9		https://www.friendsofqueensparkbushland.org.au/bossiae-eriocarpa/
<i>Burchardia congesta</i>	9		https://www.friendsofqueensparkbushland.org.au/burchardia-congesta/
<i>Calistemon citrinus</i> 'White Anzac'	64		https://www.gardensonline.com.au/gardenshed/plantfinder/show_1170.aspx
<i>Calothamnus hirsutus</i>	47		https://www.lulfitz.com.au/calothamnus-hirsutus-syn-villosus
<i>Calothamnus quadrifidus</i> dwarf	27		https://www.gardensonline.com.au/GardenShed/PlantFinder/Show_2151.aspx
<i>Calothamnus sanguineus</i>	9		https://www.gardensonline.com.au/gardenshed/plantfinder/show_3354.aspx
<i>Calytrix angulata</i>	9, 47	Sally Page	https://davesgarden.com/guides/pf/showimage/420707/#b
<i>Calytrix tetragona</i> prostrate	64		https://triggplants.com.au/product/calytrix-tetragona-prostrate-form-in-75mm-supergro-tube/
<i>Carex apressa</i>	27, 47		https://coolumnatives.com/wordpress/carex-appressa-1-2016-bluedale-nursery-sydney/
<i>Carex tereticaulis</i>	47		https://apacewa.org.au/plant/carex-tereticaulis/
<i>Casuarina glauca</i> 'Cousin it'	64		https://www.thetutuguru.com.au/shop/casuarina-cousin-it-8-pot/
<i>Chorizema cordatum</i>	64		https://www.bgpa.wa.gov.au/about-us/information/our-plants/plants-in-focus/2563
<i>Conostylis aculeata</i>	9, 47		https://austplants.com.au/Conostylis-aculeata-Prickly-conostylis
<i>Conostylis candicans</i>	9, 27, 47		https://www.gardeningwithangus.com.au/conostylis-candicans-grey-cottonheads/
<i>Dampiera linearis</i> 'Blue'	9		https://tideandco.com.au/collections/native-plants/products/dampiera-diversifolia-1
<i>Dampiera linearis</i> 'Cobalt Mound'	9		https://www.gardensonline.com.au/gardenshed/plantfinder/show_2239.aspx
<i>Dampiera trigona</i>	27, 47		https://www.gardeningwithangus.com.au/dampiera-trigona/
<i>Darwinia citriadora</i> 'Seaspray'	64		https://www.gardeningwithangus.com.au/darwinia-citriadora-seaspray-darwinia/
<i>Dasypogon bromeliifolius</i>	27	Russell Cumming	http://taxondiversity.fieldofscience.com/2018/01/
<i>Dianella hybrid</i> Variegated	64		https://www.turfit.com.au/landscaping-plans-b-options/
<i>Dianella revoluta</i>	9		https://simontheplantman.com.au/product/dianella-revoluta/
<i>Dianella revoluta</i> 'Revelation'	47		https://antzplants.com.au/shop/dianella-caerulea/
<i>Dianella revoluta</i> 'Little Rev'	27		https://www.gardeningwithangus.com.au/dianella-revoluta-little-rev-native-flax/
<i>Dianella revoluta</i> 'Revelation'	27		https://cocreative.co.nz/blog/2017/11/12/plant-of-the-week-dianella-revoluta-revelation
<i>Dielsia stenostachya</i>	47		https://www.lulfitz.com.au/dielsia-stenostachya
<i>Eremaea pauciflora</i>	27	Graham Zemunik	https://twitter.com/grahamzem/status/1049644664918179840/photo/1
<i>Eremophila glabra</i> 'Amber Carpet'	47		https://www.gardeningwithangus.com.au/eremophila-glabra-amber-carpet/eremophila-glabra_emu-bush_amber-carpet-1/
<i>Eremophila glabra</i> 'Blue Horizon'	47		https://domusnursery.com.au/plants/plant.cshtml?plant_code=erebluho
<i>Eremophila glabra</i> 'Kalbarri Carpet'	47		https://austrafloa.com/project/eremophila-kalbarri-carpet/
<i>Eremophila glabra</i> 'Red Desert'	47		https://www.ebay.com.au/itm/RED-DESERT-Eremophila-glabra-x-E-deciplens-native-flowers-plant-in-140mm-pot-/264478551982

<i>Eremophila glabra compactum</i>	47		https://www.gardeningwithangus.com.au/eremophila-glabra-silver-ball-emu-bush/
<i>Eremophila glabra prostrata</i>	47		https://www.turfit.com.au/landscaping-plans-b-options/
<i>Gastrolobium celsianum</i>	47	Danielle Langlois	https://plantlust.com/plants/27068/gastrolobium-celsianum/
<i>Gompholobium scabrum</i>	27		https://www.olelantanaseeds.com.au/product/gompholobium-scabrum-painted-lady-seeds-x30/
<i>Grevillea</i> 'Crimson Villea'	64		https://www.ozbreed.com.au/plant-ranges/native-shrubs-groundcovers/crimson-villea-grevillea/
<i>Grevillea hybrid</i> 'Coverall'	64		https://www.benaranurseries.com/plants/grevillea-coverall-10541
<i>Grevillea hybrid</i> 'Red Coral'	64		https://www.gardeningwithangus.com.au/grevillea-red-coral/grevillea-hybrid_red-coral-1/
<i>Grevillea obtusifolia</i> 'Gin Gin Gem'	64		https://www.gardeningwithangus.com.au/grevillea-obtusifolia-ging-gin-gem/
<i>Hakea ruscifolia</i>	9		https://en.wikipedia.org/wiki/Hakea_ruscifolia
<i>Hakea trifurcata</i>	47		http://www.northqueenslandplants.com/Australian%20Plant%20Families%20N-S/Proteaceae/Hakea/Hakea%20trifurcata.html
<i>Hakea varia</i>	27		http://www.plantthis.com.au/plant-information.asp?gardener=27495&tabview=bio&plantSpot=
<i>Hardenbergia comptoniana</i>	9, 47		https://waggaflora.com.tw/tners-climbers/purple-coral-pea/
<i>Hemiandra pungens</i>	9, 27		https://triggplants.com.au/product/hemiandra-pungens-prostrate-form-in-75mm-supergro-tube/
<i>Hemiandra pungens alba</i>	9, 27		https://www.lulfitz.com.au/hemiandra-pungens-alba
<i>Hemiandra pungens purpurea</i>	9, 27, 47		https://triggplants.com.au/?attachment_id=1859
<i>Hibbertia grossularifolia</i>	64		https://www.lulfitz.com.au/hibbertia-grossulariifolia
<i>Hypocalymma angustifolia</i>	27		https://en.wikipedia.org/wiki/Hypocalymma_angustifolium
<i>Hypocalymma robustum</i>	9		https://www.lulfitz.com.au/hypocalymma-robustum
<i>Isolepis cernua</i>	27		https://www.randomharvest.co.za/en-us/South-African-Indigenous-Plants/Show-Plant/PlantId/461/Plant/Isolepis-cernua
<i>Jacksonia calcicola prostrate</i>	27		https://apacewa.org.au/plant/jacksonia-calcicola/jacksonia-calcicola/
<i>Jacksonia furcellata</i>	27		http://www.northqueenslandplants.com/Australian%20Plant%20Families%20A-F/Fabaceae/Jacksonia/Jacksonia%20sternbergiana.html
<i>Jacksonia sternbergiana</i>	9		https://perthwildflowers.wordpress.com/2015/11/29/stinkwood-3/
<i>Kunzea recurva</i>	27		https://en.wikipedia.org/wiki/Kunzea_recurva
<i>Lepidosperma longitudinale</i>	27		https://www.benaranurseries.com/revveg/lepidosperma-longitudinale-3753
<i>Lepidospermua gladiatum</i> 'Gladiator'	64		https://www.benaranurseries.com/plants/lepidosperma-gladiator
<i>Leptospermum laevigatum</i> 'Foreshore'	64		https://www.homedesigndirectory.com.au/gardening/plant-finder/plant-descriptions/leptospermum-laevigatum/fore-shore/?plant-id=473
<i>Leptospermum laevigatum</i> 'Shore Tuff'	64		https://www.homedesigndirectory.com.au/gardening/plant-finder/plant-descriptions/leptospermum-laevigatum/shore-tuff/?plant-id=474
<i>Leptospermum</i> x 'Pink Cascade'	64		https://www.theplantstore.co.nz/products/shrubs/leptospermum-pink-cascade/
<i>Leucophyta brownii</i>	64		https://www.bgpa.wa.gov.au/about-us/information/our-plants/plants-in-focus/2559-leucophyta-brownii
<i>Lobelia anceps</i>	47		https://www.randomharvest.co.za/South-African-Indigenous-Plants/Show-Plant/PlantId/294/Plant/Lobelia-anceps
<i>Macrozamia riedlei</i>	9		http://www.cycadpalm.com/mari.html
<i>Melaleuca incana</i> nana	27		https://triggplants.com.au/product/melaleuca-incana-dwarf-form-in-75mm-supergro-tube/
<i>Melaleuca lateritea</i>	47		https://australianwildlife.com.au/native-flora-of-australia/melaleuca-lateritia-robin-redbreast-bush/
<i>Melaleuca scabra</i>	9		https://en.wikipedia.org/wiki/Melaleuca_scabra
<i>Melaleuca systema</i>	27	Geoff Derrin	https://en.wikipedia.org/wiki/Melaleuca_systema
<i>Orthrosanthus laxus</i>	9, 47		https://www.walkgps.com.au/walk/flynn-hills-walk/
<i>Patersonia occidentalis</i>	9		https://www.thetutuguru.com.au/shop/patersonia-purple-flag-6inch/
<i>Pericalymma ellipticum</i>	27		https://www.friendsofqueensparkbushland.org.au/pericalymma-ellipticum/
<i>Philoteca spicata</i>	27	Gail Reed	https://davesgarden.com/guides/pf/showimage/419096/
<i>Phlebocarya ciliata</i>	27	Francis Jason Nge	https://davesgarden.com/guides/pf/showimage/444879/
<i>Pimelia rosea</i>	47	Brian Freeman	https://davesgarden.com/guides/pf/showimage/446054/
<i>Scaevola aemula</i>	64		https://www.peconicestuary.org/plant/scaevola-aemula/
<i>Scaevola aemula</i> 'Kings Park Midnight'	64		https://www.domusnursery.com.au/plants/plant.cshtml?plant_code=scamid
<i>Scaevola striata</i> 'Pink Perfections'	64		https://www.gardenexpress.com.au/shop/trees-shrubs-grasses/native-plants/native-ground-covers/
<i>Stirlingia latifolia</i>	9		https://www.olelantanaseeds.com.au/product/stirlingia-latifolia-blueboy-protea-family-evergreen-shrub-seeds-x-25/
<i>Taxandria linearifolia</i>	27		https://www.southernflora.com.au/product/taxandria-linearifolia-swamp-peppermint/
<i>Thysanotus multiflorus</i>	47		https://www.southernflora.com.au/product/thysanotus-multiflorus-many-flowered-fringe-lily/
<i>Verticordia densiflora</i>	27		https://www.friendsofqueensparkbushland.org.au/verticordia-densiflora/
<i>Viminaria juncea</i>	47	Bill de Belin	http://nativeplants-sydney.blogspot.com/2011/06/
<i>Westringia</i> 'Grey Box'	64		https://andreassengreen.com.au/product/westringia-fruticosa-wes04-pbr-grey-box/
<i>Westringia fruticosa</i> 'Low Horizon'	64		https://www.thetutuguru.com.au/shop/westringia-low-horizon-6-pot/
<i>Xanthorrhoea preissii</i>	27		https://apacewa.org.au/plant/xanthorrhoea-preissii/

This page has been intentionally left blank

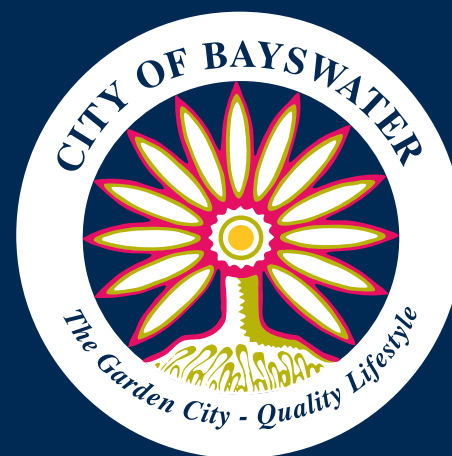

JOSH BYRNE & ASSOCIATES